

<b>Document Title</b>	Technical Report on VSS Representation
<b>Document Owner</b>	AUTOSAR
<b>Document Responsibility</b>	AUTOSAR
<b>Document Identification No</b>	1117

<b>Document Status</b>	published
<b>Part of AUTOSAR Standard</b>	Adaptive Platform
<b>Part of Standard Release</b>	R24-11

<b>Document Change History</b>			
<b>Date</b>	<b>Release</b>	<b>Changed by</b>	<b>Description</b>
2024-11-27	R24-11	AUTOSAR Release Management	<ul style="list-style-type: none"><li>Initial release</li></ul>

## Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

## Contents

1	Introduction	5
1.1	Objectives . . . . .	5
2	Methodology	6
2.1	Scope . . . . .	7
2.1.1	Limitations . . . . .	7
3	Definition of Terms and Acronyms	8
4	Related Documentation	9
5	VSS Data Catalog Representation	10
5.1	Package Structures . . . . .	10
5.1.1	Root Package Structures . . . . .	10
5.1.2	Versioning . . . . .	11
5.1.3	VSS Branch Package Structure . . . . .	11
5.2	Primitive Types . . . . .	12
5.2.1	Numeric Types . . . . .	12
5.2.2	String Type . . . . .	13
5.2.2.1	Primitive Sensors, Actuators, and Attributes . . . . .	13
5.2.2.2	Data Constraints on Primitive Values . . . . .	15
5.3	Complex Types . . . . .	17
5.3.1	Arrays . . . . .	17
5.3.2	Struct Types . . . . .	18
5.4	Units . . . . .	20
5.5	Documentation . . . . .	21
5.6	Custom VSS Key Values . . . . .	22
6	VISS Service Interfaces Catalog	24
6.1	Service Package Structures . . . . .	24
6.1.1	Service Package Structures . . . . .	24
6.2	VISS Service Interfaces . . . . .	25
6.3	VISS Model Extension . . . . .	26
6.4	VISS Service Interface Deployments . . . . .	27
6.5	Provided Service Instance . . . . .	28
7	Automotive API Gateway	29
7.1	Gateway Software Component . . . . .	30
A	Appendix	32
A.1	Mentioned Manifest Elements . . . . .	32
A.2	Examples (informative) . . . . .	57
A.2.1	Root Package Structure . . . . .	57
A.2.2	Primitive Type Modelling (informative) . . . . .	59
A.2.3	C++ Keywords . . . . .	63

A.2.4	Complex Type Modelling . . . . .	69
A.2.4.1	Variable Size Arrays . . . . .	69
A.2.4.2	Fixed Size Arrays . . . . .	71
A.2.4.3	Struct Types . . . . .	74
A.2.5	VISS Specific Model Extension . . . . .	78
A.2.6	User Defined VISS Service Deployments . . . . .	82
A.2.7	Provided Service Instances . . . . .	84
<b>B</b>	<b>Change History of AUTOSAR Traceable Items</b>	<b>85</b>
B.1	Traceable item history of this document according to AUTOSAR Release R24-11 . . . . .	85
B.1.1	Added Specification Items in R24-11 . . . . .	85
B.1.2	Changed Specification Items in R24-11 . . . . .	87
B.1.3	Deleted Specification Items in R24-11 . . . . .	87

# 1 Introduction

AUTOSAR is concerned with providing an automotive base layer catering to automotive application domains.

For an elaborate introduction please consult the explanatory document that covers the reasoning and systematic introduction into the topic.

This document is a technical report how AUTOSAR may be utilized to incorporate the Vehicle Signal Specification into AUTOSAR Applications.

## 1.1 Objectives

The specific goals are achieved by providing a unified import into AUTOSAR ARXML that is referred to as [VSS Representation](#). It thus describes an opinionated view on how a VSS catalog is represented in AUTOSAR. This provides consumers with a unified [VSS Representation](#) that is beneficial to applications or system components since they have a stable data representation to work with. By incorporating an open standard catalog in AUTOSAR consumers may profit from reduced complexity due to reduced implementation variance across industry while utilizing the existing AUTOSAR technology stack.

See figure 1.1 which outlines the resulting logical model elements.

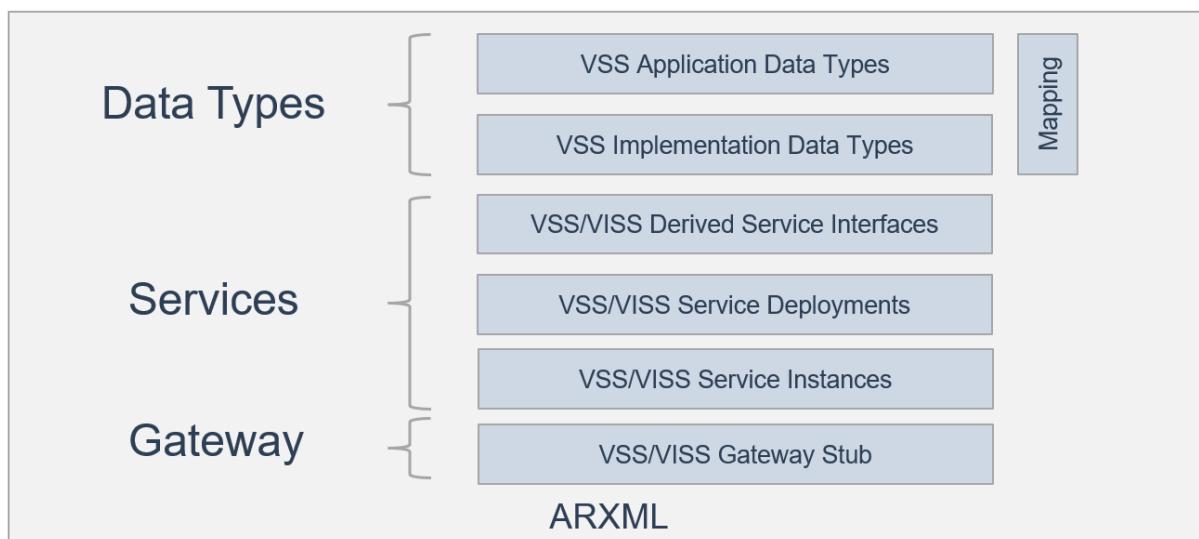


Figure 1.1: VSS Representation Model Elements

The technical report is geared towards the [AUTOSAR Adaptive Platform](#) but may not be limited to it. [AUTOSAR Classic Platform](#) may be a viable target as well but is yet to be defined.

## 2 Methodology

The following figure outlines the methodology how a VSS defined catalog and VSS import to ARXML may be utilized to provide an Automotive API based on ARA::COM.

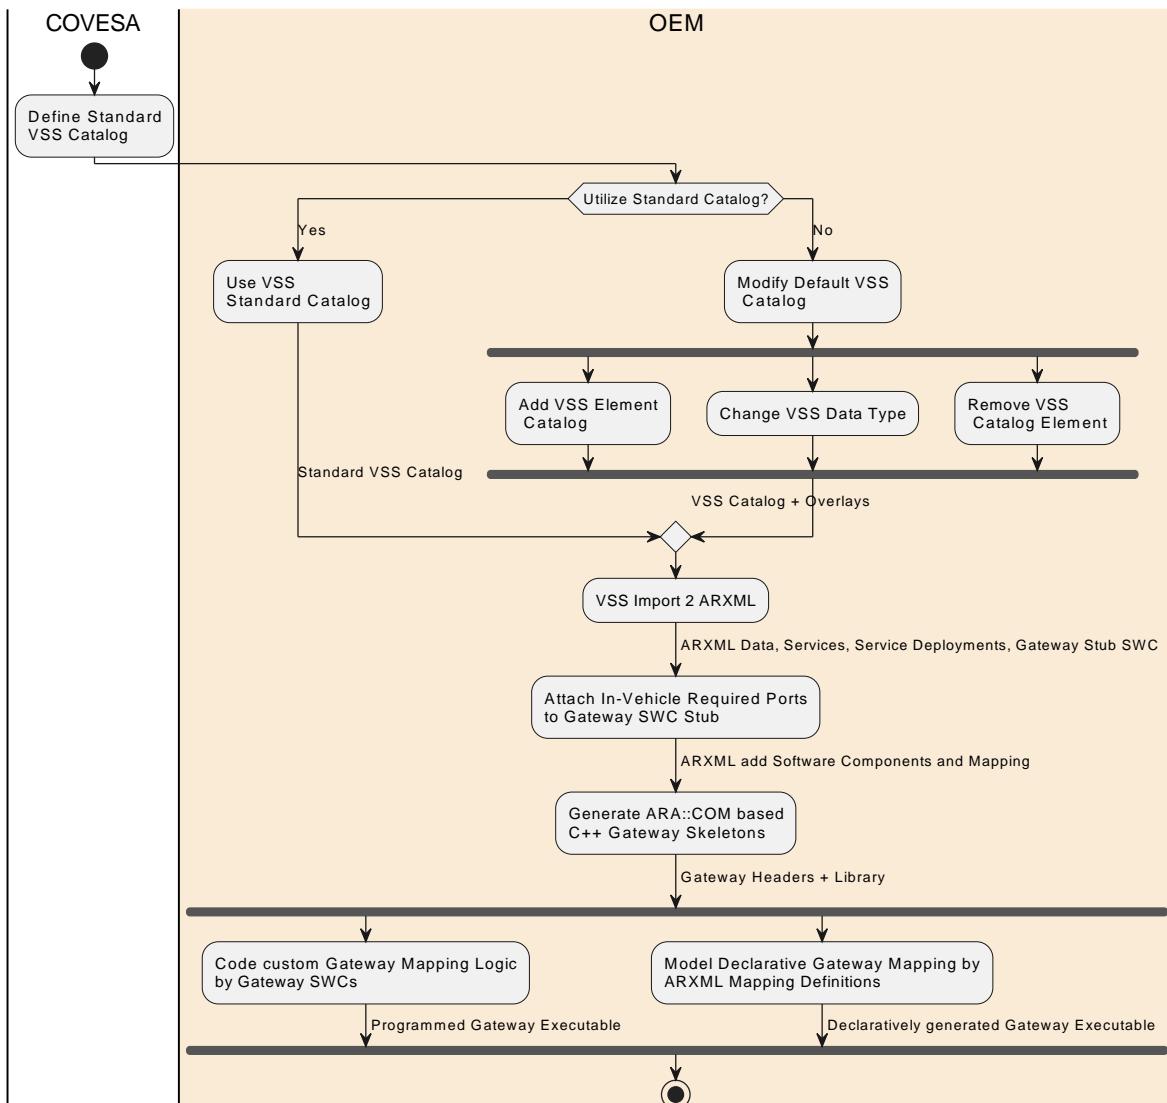


Figure 2.1: VSS based Automotive API Methodology

Starting from the standard VSS catalog an OEM may modify the data catalog and provide additional information that should be provided through the Automotive API. An OEM should be aware that if changes are made in a modifying way, general Automotive API breakage occurs. Removing branches or specific signals may be applicable, if the API Implementation provides runtime errors for absent items.

The VSS importer provides a default service interface definition based on the VSS branch structure. It adopts a specific structure that caters to the VISS semantics and aids in implementing and providing the values correctly.

The defined Automotive API Gateway Stub in [7](#) allows to have a defined stable endpoint accessible from outside the AUTOSAR ecosystem and maintains the internal flexibility within the AUTOSAR ecosystem to map signals and services by AUTOSAR means.

## 2.1 Scope

The scope of the document is to provide a unified VSS import. It does not define how a VSS representation is mapped internally to the onboard network as this is subject to OEM specifics.

### 2.1.1 Limitations

Default values in VSS are currently associated with an instance type. They are currently unsupported by the VSS Representation.

In VSS there is a mechanism to aggregate several nodes to a single branch. As this mechanism is regarded as legacy to the newer struct mechanism, the VSS Representation does not support it.

### 3 Definition of Terms and Acronyms

Terms:	Description:
VSS [1]	Vehicle Signal Specification defining both a data modelling language and a standard signal catalog
VSS Standard Catalog	The VSS defined standard public catalog containing a set of structured defined vehicle signals
VSS Importer	The entity converting VSS entities to ARXML entities
Vehicle Information Signal Service [2]	An VSS based Automotive API realization over HTTP, MQTT, and WebSocket Transports
AUTOSAR Adaptive Platform	see [3] AUTOSAR Glossary
AUTOSAR Classic Platform	see [3] AUTOSAR Glossary
Adaptive Platform Foundation	see [3] AUTOSAR Glossary
Adaptive Application	see [3] AUTOSAR Glossary
VSS Representation	The result of an VSS import described by this document

**Table 3.1: Definition of terms in the scope of this Document**

## 4 Related Documentation

- [1] Vehicle Signal Specification  
[https://covesa.github.io/vehicle\\\_\\\_signal\\\_\\\_specification/](https://covesa.github.io/vehicle\_\_signal\_\_specification/)
- [2] Vehicle Information Service Specification  
<https://github.com/COVESA/vehicle-information-service-specification/releases/tag/v2.0>
- [3] Glossary  
[AUTOSAR\\_FO\\_TR\\_Glossary](#)

## 5 VSS Data Catalog Representation

In the following sections the following notation is being used to define model elements.

<b>AR Element</b>	This entry defines the AUTOSAR metaclass the VSS element is mapped to. Moreover, a <i>name</i> for the target element is introduced in order to refer to the result of the mapping in further entries or rules.
<b>AR Container</b>	This entry specifies the AUTOSAR element that contains the target element defined in the entry above by its <i>name</i> .
<b>Attributes</b>	This entry defines the attributes and cross references of the target element.
<b>Condition</b>	In this entry a condition for the mapping can be given. If the condition is false the VSS element does not generate a target element in the AUTOSAR representation.

### 5.1 Package Structures

#### 5.1.1 Root Package Structures

The recommended AUTOSAR package structure is providing interoperability between AUTOSAR tree structures and the VSS Catalog. It maintains type references that are based on package structure naming.

Refer to the [Identifier](#) class for naming restrictions of [ARPackage](#) shortnames.

#### [AP\_TR\_VSS\_01010] Catalog VSS

*Status:* DRAFT



<b>AR Element</b>	<a href="#">ARPackage Catalogs</a>
<b>AR Container</b>	<a href="#">AUTOSAR</a>
<b>Attributes</b>	shortName = "Catalogs"
<b>AR Element</b>	<a href="#">ARPackage VSS</a>
<b>AR Container</b>	<a href="#">Catalogs</a>
<b>Attributes</b>	shortName = "VSS"
<b>AR Element</b>	<a href="#">ARPackage ApplicationDataTypes</a>
<b>AR Container</b>	<a href="#">VSS</a>
<b>Attributes</b>	shortName = "ApplicationDataTypes"
<b>AR Element</b>	<a href="#">ARPackage CppImplementationDataTypes</a>
<b>AR Container</b>	<a href="#">VSS</a>
<b>Attributes</b>	shortName = "CppImplementationDataTypes"
<b>AR Element</b>	<a href="#">ARPackage CompuMethods</a>
<b>AR Container</b>	<a href="#">VSS</a>
<b>Attributes</b>	shortName = "CompuMethods"

<b>AR Element</b>	<i>ARPackages</i> <i>Units</i>
<b>AR Container</b>	VSS
<b>Attributes</b>	shortName = "Units"

]

The example [A.1](#) outlines the recommended root package structure shown in ARXML.

### 5.1.2 Versioning

Versioning must consider the modelling available in the specific [VSS](#) version and the [VSS](#) standard catalog contents.

Since the catalog version of the standard catalog is a modelling artifact of [VSS](#) it is represented in ARXML through mapping. In case support of multiple [VSS](#) catalog versions is required the parent package of the catalog may be suffixed with the version number and underscore. As a consequence references to updated catalogs items may be kept stable for updated catalogs and only added or removed items may require updates or references to older catalogs.

#### [AP\_TR\_VSS\_01018] Package VSS Versions

*Status:* DRAFT

]

<b>AR Element</b>	<i>ARPackages</i> <i>Version</i>
<b>AR Container</b>	VSS
<b>Attributes</b>	shortName = "Version_4_2"
<b>Condition</b>	—

]

The modelling artifacts supported in this technical report are based on VSS version 4.2.

### 5.1.3 VSS Branch Package Structure

VSS branches are used to logically access vehicle sensors, actuators, or attributes. The VSS Importer preserves that access structure through [ARPackages](#).

VSS Branches in general refer to single physical vehicle entities. For specific cases multiple of the physical entities exist in the vehicle. Examples are tires or doors which may be instantiated multiple times.

In order to honor AUTOSAR Mapping philosophy branch instances shall not be modelled at the type level.

### [AP\_TR\_VSS\_01019] VSS Branch Mapping for Types as ARPackage Structure

*Status:* DRAFT

For each VSS Branch that has no instance property there is an ARPackage. All child VSS Branches are child ARPackages in AUTOSAR. This scheme applies to the ARPackage's ApplicationDataTypes, ImplementationDataTypes, and CompuMethods.]

The example A.3 showcases the VSS Branch Mapping Structure.

## 5.2 Primitive Types

The following section outlines the mapping between vss and AUTOSAR ApplicationPrimitiveDataType and their respective properties and StdCppImplementationDataTypes.

### 5.2.1 Numeric Types

The numerical base types have no ApplicationPrimitiveDataType representation.

The following table outlines the Mappings to the AUTOSAR Adaptive Platform Implementation Types.

If StdCppImplementationDataTypes are generated by the VSS Importer the platform shall reference StdCppImplementationDataTypes of the standard platform types according to the following table. These types reside in ARPackage /AUTOSAR/StdTypes.

### [AP\_TR\_VSS\_02001] VSS Primitive Implementation Data Types

*Status:* DRAFT

[

VSS Data Type:	AUTOSAR StdCppImplementation-DataType:
uint8	uint8_t
uint16	uint16_t
uint32	uint32_t
uint64	uint64_t
int8	int8_t
int16	int16_t
int32	int32_t

VSS Data Type:	AUTOSAR StdCppImplementation-DataType:
int64	int64_t
boolean	bool
float	float
double	double

]

## 5.2.2 String Type

VSS is unicode encoded but leaves open if UTF-8 or UTF-16 is utilized.

### [AP\_TR\_VSS\_02003] VSS Primitive String Type

*Status:* DRAFT

〔The [VSS Importer](#) shall create UTF-8 encoded Strings. The encoding is not modelled. UTF-16 is currently unsupported.〕

#### 5.2.2.1 Primitive Sensors, Actuators, and Attributes

##### [AP\_TR\_VSS\_02010] Application Data Type

*Status:* DRAFT

〔For each Sensor, Actuator and Attribute that refers to a primitive data type the [VSS Importer](#) shall create an [ApplicationDataType](#). It shall be placed into the respective [ARPackage](#) that reflects the VSS non instance branch.〕

##### [AP\_TR\_VSS\_02011] Application Data Type Name

*Status:* DRAFT

〔[VSS Importer](#) shall set the [ApplicationDataType](#) short name equal to the VSS name.〕

##### [AP\_TR\_VSS\_02021] StdCppImplementationDataType

*Status:* DRAFT

〔If [StdCppImplementationDataType](#)s are imported for each Sensor, Actuator and Attribute that refers to a primitive data type the [VSS Importer](#) shall create an [StdCppImplementationDataType](#). It shall be placed into the respective [ARPackage](#) that reflects the VSS non instance branch.〕

## [AP\_TR\_VSS\_02022] StdCppImplementationDataType Name

*Status:* DRAFT

[If `StdCppImplementationDataType`s are imported the `VSS Importer` shall set the `StdCppImplementationDataType` short name equal to the VSS name.]

Importing `StdCppImplementationDataType` is optional for two reasons. VSS outlines that the implementation representation may be different in the programming language or on the wire from what is defined in the catalog. The default goal of the importer is to reflect the VSS data types as zero cost abstractions in C++ through type aliases. However, it is feasible to resort to already defined AUTOSAR Standard Types and map only those the application data types without the use of type aliases. This will result in less code but may reduce readability for end users. Be aware that applications built on top break in compatibility if `StdCppImplementationDataType` are modelled with different schemes.

It is therefore optional but recommended that the VSS importer creates `StdCppImplementationDataType` as separate data types.

## [AP\_TR\_VSS\_02023] StdCppImplementationDataType Namespace

*Status:* DRAFT

[`VSS` namespace is formed by `covesa::vss` suffixed by the current `VSS` type path. The `VSS Importer` shall create `SymbolProps`s for each segment of that namespace starting with `ns0` as the first name and symbol being the segment. The first name shall count upwards. In case the VSS name represents a C++ Keyword it shall be suffixed with " \_"]

See A.5 for an example Namespace modelling.

See A.2.3 for the CPP keyword list.

## [AP\_TR\_VSS\_02051] DataTypeMappingSet Location

*Status:* DRAFT

[All `DataTypeMappingSet`s shall be contained in the `ARPackage Catalog/VSS(DataTypeMapping)`.]

## [AP\_TR\_VSS\_02052] DataTypeMapping

*Status:* DRAFT

[All `DataTypeMap` may be contained in a single `DataTypeMappingSet`. For each Sensor, Actuator, and Attribute where both an `ApplicationDataType` and `StdCppImplementationDataType` has been created the `VSS Importer` shall create an `DataTypeMap` which maps the `ApplicationDataType` to the `StdCppImplementationDataType`. The `DataTypeMap` shall be placed into the `ARPackage DataTypeMappingSet`.]

### 5.2.2.2 Data Constraints on Primitive Values

The AUTOSAR type model allows the definition of Data Constraints. They may further be reused by referencing Data Constraints from multiple AUTOSAR Application Data Types. From the type perspective the constraint is tied to the application data type. To simplify VSS importer implementations data constraint reuse is discouraged for data types that formulate specific data restrictions. Data constraint reuse is allowed only for primitive types.

#### [AP\_TR\_VSS\_02061] Data Constraint per Data Type

*Status:* DRAFT

〔For each `ApplicationDataType` the `VSS Importer` shall create a separate `PhysConstrs` data constraint.〕

#### [AP\_TR\_VSS\_02062] Data Constraint Limits

*Status:* DRAFT

〔For the `VSS` node attributes min and max `VSS Importer` shall create lower and upper limits. The interval type is "CLOSED" for the Lower and Upper limit.〕

#### [AP\_TR\_VSS\_02063] Data Constraint Location

*Status:* DRAFT

〔The `VSS Importer` shall create Data Constraints in the same `ARPackage` as the `ApplicationDataType`〕

#### [AP\_TR\_VSS\_02064] Data Constraint Naming

*Status:* DRAFT

〔The `VSS Importer` shall set the data constraint short name to be identical to the `ApplicationDataType` with the suffix "DC". If there are multiple data constraints applicable to a single data type, the suffix shall be DCn where n is a natural number starting from 1.〕

VSS mandates that if no explicit limit of a data type is supplied, the default limits of the referenced primitive data type apply.

For the following primitive types the `VSS Importer` shall create the following data constraints.

#### [AP\_TR\_VSS\_02071] VSS Primitive Types Boundary Restrictions

*Status:* DRAFT

〔

VSS Data Type:	VSS Min:	VSS Max:	AUTOSAR ADT:	AUTOSAR Adaptive Platform Min:	AUTOSAR Adaptive Platform Max:
uint8	0	255	uint8_t	0	255
uint16	0	65535	uint16_t	0	65535
uint32	0	4294967295	uint32_t	0	4294967295
uint64	0	$2^{(64)} - 1$	uint64_t	0	$2^{(64)} - 1$
int8	-128	127	int8_t	-128	127
int16	-32768	32767	int16_t	-32768	32767
int32	-2147483648	2147483647	int32_t	-2147483648	2147483647
int64	$-2^{(63)}$	$2^{(63)} - 1$	int64_t	$-2^{(63)}$	$2^{(63)} - 1$
boolean	0/false	1/true	bool	0/false	1/true
float	$-3.4e - 38$	$3.4e + 38$	float	$-3.402823466e - 38$	$+3.402823466e + 38$
double	$-1.80e + 308$	$1.80e + 308$	double	$-1.80e + 308$	$1.80e + 308$

]

See [A.6](#) for an example Data Constraint modelling.

## [AP\_TR\_VSS\_02072] VSS String Enum Restrictions

Status: DRAFT

[For each VSS leaf that is of primitive value with allowed values the [VSS Importer](#) shall produce a [CompuMethod](#) containing a TEXTTABLE with the allowed [VSS](#) values. The [VSS Importer](#) shall set the name of the [CompuMethod](#) to the VSS data type name suffixed with CM. The [VSS Importer](#) shall create a [CompuScale](#) for an enumeration element. The [VSS Importer](#) shall create a LowerLimit and an UpperLimit for each enumeration element item. The [VSS Importer](#) shall set the value to the current element count. The [VSS Importer](#) shall create a [CompuConst](#) setting the actual allowed string value of the VSS enumeration element. The [VSS Importer](#) shall reference the produced [CompuMethod](#) through [SwDataDefProps](#).]

Additional enumeration comments clarifying the semantics are not respected in AUTOSAR

See [A.7](#) for an example of enumeration restriction.

## 5.3 Complex Types

### 5.3.1 Arrays

#### [AP\_TR\_VSS\_03101] Application Array Data Type

*Status:* DRAFT

For each `VSS` node of type Sensor, Actuator and Attribute that has an array type the `VSS Importer` shall create an `ApplicationArrayType` with its `category` is set to `ARRAY`.]

#### [AP\_TR\_VSS\_03104] Application Array Name

*Status:* DRAFT

The `VSS Importer` shall set `ApplicationArrayType` short name to the `VSS` node name suffixed with "Array".]

#### [AP\_TR\_VSS\_03105] Application Array Element Data Type

*Status:* DRAFT

For each `VSS` node of type Sensor, Actuator and Attribute that has an array type the `VSS Importer` shall create an `ApplicationDataType`.

#### [AP\_TR\_VSS\_03106] Application Array Element Name

*Status:* DRAFT

The `VSS Importer` shall set `ApplicationDataType` short name to the `VSS` node name.]

#### [AP\_TR\_VSS\_03102] Application Array Data Type Reference

*Status:* DRAFT

The `VSS Importer` shall create a type reference from the array to the corresponding `ApplicationDataType` element. This may be a `ApplicationPrimitiveDataType`, an `ApplicationArrayType` or an `ApplicationRecordDataType`.]

#### [AP\_TR\_VSS\_03103] Application Array Size Handling

*Status:* DRAFT

The `VSS Importer` shall set the property `ArraySizeSemantics` to

FIXED-SIZE

if the `VSS` leaf defines the `arraysize` property and

VARIABLE-SIZE

if the arraysize property is undefined. The `VSS Importer` shall create an element `maxNumberOfElements` as `PositiveIntegerValueVariationPoint` and write the contents of arraysize to the `BlueprintValue`.]

See A.8 for an example application array data type with variable size.

### [AP\_TR\_VSS\_03110] C++ Implementation Array Data Type

*Status:* DRAFT

[If `StdCppImplementationDataTypes`s are imported then for each Sensor, Actuator and Attribute the `VSS Importer` shall create a `StdCppImplementationDataType`. If the `VSS` node has the attribute `arraySize` set, the `category` shall be set to "ARRAY". If the `VSS` node has no attribute `arraySize` set, the `category` shall be set to "VECTOR".]

### [AP\_TR\_VSS\_03111] C++ Implementation Array Data Reference

*Status:* DRAFT

[If `StdCppImplementationDataTypes`s are imported the `VSS Importer` shall create a `CppTypeTemplateArgument` that references the corresponding `StdCppImplementationDataType`.]

### [AP\_TR\_VSS\_03112] C++ Implementation Array Name

*Status:* DRAFT

[If `StdCppImplementationDataTypes`s are imported the `VSS Importer` shall set the `StdCppImplementationDataType` short name that refers to the array to the `VSS` node name suffixed with "Array".]

See A.9 for an example array implementation data type.

## 5.3.2 Struct Types

### [AP\_TR\_VSS\_03201] Application Record Data Type

*Status:* DRAFT

[For each `VSS` node of type struct `VSS Importer` shall create an `ApplicationRecordDataType`. The `category` is set to STRUCTURE.]

### [AP\_TR\_VSS\_03202] Application Record Name

*Status:* DRAFT

[The `VSS Importer` shall set `ApplicationRecordDataType` shortname to the `VSS` node name.]

### [AP\_TR\_VSS\_03203] Application Record Element Type

*Status:* DRAFT

〔For each `VSS` node of type struct `VSS Importer` shall create an `ApplicationRecordElement`. The category is set to "VALUE".〕

### [AP\_TR\_VSS\_03204] Application Record Element Type Reference

*Status:* DRAFT

〔The `VSS Importer` shall resolve `VSS` primitive data type properties to `ApplicationPrimitiveDataTypes` in the type reference. The `VSS Importer` shall reference properties of the `VSS` struct data type to the correspondig `ApplicationRecordDataType` in the type reference.〕

See example A.12 for modelling of structs with `ApplicationDataType`s.

### [AP\_TR\_VSS\_03211] C++ Implementation Struct Data Type

*Status:* DRAFT

〔If `StdCppImplementationDataType`s are imported the `VSS Importer` shall create a `StdCppImplementationDataType`. The `category` is set to "STRUCTURE".〕

### [AP\_TR\_VSS\_03212] C++ Implementation Element Type Reference

*Status:* DRAFT

〔If `StdCppImplementationDataType`s are imported the `VSS Importer` shall resolve `VSS` primitive data types and struct data type properties to `StdCppImplementationDataType` in the type reference.〕

### [AP\_TR\_VSS\_03213] C++ Implementation Struct Array Name

*Status:* DRAFT

〔The `VSS Importer` shall set the short name to the `VSS` node property name of the struct.〕

### [AP\_TR\_VSS\_03214] C++ Implementation Element Array Name

*Status:* DRAFT

〔The `VSS Importer` shall set the short name to the `VSS` node property name.〕

See example A.13 for modelling of structs with `StdCppImplementationDataType`s.

## 5.4 Units

Units define standards for expressing and comparing measures relating to physical quantities.

[VSS](#) defines a set of units within specified unit files which abbreviations open for extension and modification. AUTOSAR on its behalf defines blueprint for Units.

Both specifications have Units in common but also define additional Units.

[VSS](#) mentions that the default catalog defines default units, but APIs may deviate from that setting.

AUTOSAR supports that philosophy through [ApplicationDataTypes](#). [ApplicationDataTypes](#) reference units. CompuMethods convert values from [ApplicationDataType](#) to [StdCppImplementationDataTypes](#) and vice versa on the modelling level. This may convert a speed available in km/h in [VSS](#) and on AUTOSAR [ApplicationDataType](#) to m/s on [StdCppImplementationDataType](#).

### [AP\_TR\_VSS\_04401] Common Unit Mapping

*Status:* DRAFT

〔For [VSS](#) Units that equal semantically the AUTOSAR counterpart the [VSS Importer](#) shall not import the respective units.〕

Example of matching [VSS](#) and AUTOSAR Units are

- mm
- km
- km/h
- l

### [AP\_TR\_VSS\_02402] VSS Units

*Status:* DRAFT

〔[VSS](#) Units that have no representation in AUTOSAR shall be imported.〕

Example of Units that are defined in AUTOSAR but not in [VSS](#)

- cm
- inch
- lbs
- kWh/100km

**[AP\_TR\_VSS\_04003] VSS Units Package**

*Status:* DRAFT

〔Absent AUTOSAR Units that are present in [VSS](#) shall be imported by the [VSS Importer](#) to the [VSS](#) Units Package.〕

VSS quantities that relate units to be compatible are not considered in AUTOSAR.

**[AP\_TR\_VSS\_04404] VSS Units Reference**

*Status:* DRAFT

〔[VSS](#) Units shall be referenced by the [ApplicationDataType](#) through [SwDataDefProps](#).〕

## 5.5 Documentation

For each primitive, array, struct and struct element [VSS](#) node documentation the [VSS Importer](#) shall create respective documentation structures in [ApplicationPrimitiveDataType](#) [ApplicationArrayType](#) [ApplicationRecordDataType](#) [ApplicationRecordElement](#). The [VSS Importer](#) shall create a [MultiLanguageOverviewParagraph](#). The [VSS Importer](#) shall create a [LOverviewParagraph](#). The [VSS Importer](#) shall create a [MixedContentForOverviewParagraph](#) for the [VSS](#) description. If there is no comment in [VSS](#) a [MixedContentForOverviewParagraph](#) shall not be created. The [VSS Importer](#) shall create a [DocumentationBlock](#) for the [VSS](#) comment. If there is a comment in the [VSS](#) node, the [VSS Importer](#) shall create a [Note](#) for the [VSS](#) comment. The contents of the comment shall be set by the the [VSS Importer](#) to the contents of the [VSS](#) node comment.

**[AP\_TR\_VSS\_04440] VSS Description Base Structure**

*Status:* DRAFT

〔

<b>AR Element</b>	<a href="#">MultiLanguageOverviewParagraph</a>
<b>AR Container</b>	<a href="#">ApplicationDataType</a>

〕

**[AP\_TR\_VSS\_04441] VSS Description Base Structure**

*Status:* DRAFT

〔

<b>AR Element</b>	<a href="#">LOverviewParagraph</a>
-------------------	------------------------------------

<b>AR Container</b>	<i>MultiLanguageOverviewParagraph</i>
---------------------	---------------------------------------

]

**[AP\_TR\_VSS\_04442] VSS Description***Status:* DRAFT

[

<b>AR Element</b>	<a href="#">MixedContentForOverviewParagraph</a>
<b>AR Container</b>	<i>LOverviewParagraph</i>

]

**[AP\_TR\_VSS\_04443] VSS Comment Base Structure***Status:* DRAFT

[

<b>AR Element</b>	<a href="#">DocumentationBlock</a>
<b>AR Container</b>	<i>ApplicationDataType</i>

]

**[AP\_TR\_VSS\_04444] VSS Comment***Status:* DRAFT

[

<b>AR Element</b>	<a href="#">Note</a>
<b>AR Container</b>	<i>DocumentationBlock</i>

]

## 5.6 Custom VSS Key Values

VSS allows the definition of custom key value pairs through overlays for nodes. It is desirable to maintain that information in AUTOSAR ARXML since it may encode relevant information.

**[AP\_TR\_VSS\_04450] VSS Key and Value Base Structure**

*Status:* DRAFT

〔If a [VSS](#) node contains at least one key value pair, the [VSS Importer](#) shall create an [AdminData](#) model element on the [ApplicationDataType](#) representing the [VSS](#) node. The [VSS Importer](#) shall create a Special Data Group [Sdg](#) setting the [gid](#) attribute to [VSS](#).〕

**[AP\_TR\_VSS\_04451] VSS Key and Value modelling**

*Status:* DRAFT

〔For each overlay key and value pair the [VSS Importer](#) shall create a [Sd](#). The [VSS Importer](#) shall set the [gid](#) attribute to the [VSS](#) node overlay key and the [value](#) attribute to the [VSS](#) node overlay value.〕

The example [A.14](#) outlines a key value pair representation in ARXML.

## 6 VISS Service Interfaces Catalog

### 6.1 Service Package Structures

#### 6.1.1 Service Package Structures

The recommended AUTOSAR package structure is as follows.

Refer to the [Identifier](#) class for naming restrictions of [ARPackage](#) short names.

#### [AP\_TR\_VSS\_05011] AutomotiveAPI

*Status:* DRAFT

└


AR Element	<a href="#">ARPackage</a> <i>AutomotiveAPI</i>
AR Container	<i>AUTOSAR</i>
Attributes	shortName = "AutomotiveAPI"
AR Element	<a href="#">ARPackage</a> <i>VISS</i>
AR Container	<i>AutomotiveAPI</i>
Attributes	shortName = "VISS"
AR Element	<a href="#">ARPackage</a> <i>ServiceInterfaces</i>
AR Container	<i>VISS</i>
Attributes	shortName = "ServiceInterfaces"
AR Element	<a href="#">ARPackage</a> <i>ServiceInterfaces</i>
AR Container	<i>VISS</i>
Attributes	shortName = "ServiceInterfaces"
AR Element	<a href="#">ARPackage</a> <i>AutomotiveAPIGateway</i>
AR Container	<i>AutomotiveAPI</i>
Attributes	shortName = "Gateway"
AR Element	<a href="#">ARPackage</a> <i>ServiceInstances</i>
AR Container	<i>Gateway</i>
Attributes	shortName = "ServiceInstances"
AR Element	<a href="#">ARPackage</a> <i>ServiceInstanceMappings</i>
AR Container	<i>Gateway</i>
Attributes	shortName = "ServiceInstanceMappings"
AR Element	<a href="#">ARPackage</a> <i>SWC</i>
AR Container	<i>Gateway</i>
Attributes	shortName = "SWC"

┘

VSS does not define service interfaces. The tree formed by branches provides logical grouping that can be utilized to form service interfaces. The way that VSS is modelled this provides a convenient logical structure for application consumers. On the other hand utilizing this structure may not be well applicable for service providers since only portions of the contained fields, methods or events are available at the deployment

location. In such a scenario flexibility in separating or aggregating VSS sensor and actuators is required. This is a problem if a unified In-Vehicle API based on ARA::COM or SOME/IP shall be provided. Consumers of an API then require deployment specific information reducing the non-functional requirement of portability with respect to consumers of such an API.

The VSS specification does not specify an application API but suggests that Vehicle APIs based on VSS operate in a declarative style.

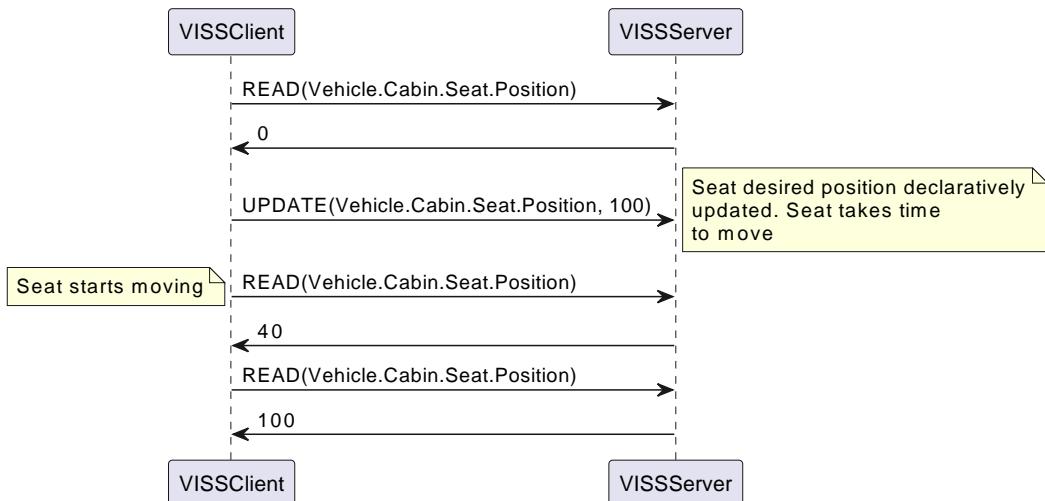

**Figure 6.1: Declarative API Example**

See figure 6.1 for an example seat position update through VISS.

In a declarative style API there is a distinction between a desired value to be taken and the current value of the entity. By utilizing such an API style the supervision of reaching the desired state remains close to the sensors and actuators and clients can be strongly decoupled from remote sensors and actuators because they have less responsibility. A downside is that for clients that realize remotely driven control loops the declarative API style is unfavorable.

Applicability of such an API style onboard the vehicle may be limited due to resource constraints since two distinct values would be required to be stored in memory. Another limiting factor to applicability may be the scenario of co-design of client and server which form a coherently behaving control loop.

## 6.2 VISS Service Interfaces

The goal is therefore to provide an API that realizes a Declarative Service Interface to fulfill the automotive gateway use case. Other use cases may or may not make use of this API style depending on their needs.

ARA::COM does not provide a declarative semantic in a single access primitive. However by a combination of several ARA::COM access primitives the declarative behavior

can be established. Utilizing more than one access primitive yields the benefit to be more explicit when mapping primitives to in vehicle accesses. A drawback is that more authoring is required as a consequence.

In order to realize the declarative semantics a field is utilized for data getting and notification. A method is used for setting the data value declaratively.

### [AP\_TR\_VSS\_05201] Service Interfaces

*Status:* DRAFT

[The [VSS Importer](#) shall produce a [ServiceInterface](#) for each [VSS](#) branch that is not an instance.]

Be aware that [VSS aggregate:true](#) does not have semantics in the VSS Representation and shall not produce a struct of the contained elements.

### [AP\_TR\_VSS\_05202] Data Retrieval

*Status:* DRAFT

[The [VSS Importer](#) shall produce a [Field](#) for each VSS Sensor, Actuator and Attribute. The field shall have hasGetter and hasNotifier attributes set to true while having the hasSetter attribute set to false. The field short name shall reflect the last name of the VSS sensor, attribute or actuator. The [VSS Importer](#) shall create the [Field](#) in the respective [ServiceInterface](#).]

### [AP\_TR\_VSS\_05203] Data Updates

*Status:* DRAFT

[The [VSS Importer](#) shall produce a [ClientServerOperation](#) with the VSS node data type as single argument to be set. The method short name shall reflect the last name of the VSS sensor, attribute or actuator prefixed by set. The [VSS Importer](#) shall create the [ClientServerOperation](#) in the respective [ServiceInterface](#).]

## 6.3 VISS Model Extension

To model the VISS communication UserDefined model artifacts are utilized. In order to distinguish between other UserDefined model artifacts a qualification that the UserDefined model artifacts are indeed VISS is required.

See example [A.15](#) for an example of a model extension for VISS.

This model extension is utilized in the following sections to create the necessary artifacts.

## 6.4 VISS Service Interface Deployments

### [AP\_TR\_VSS\_05210] VISS/VSS Service Deployments

*Status:* DRAFT

[For each VSS based Service the `VSS Importer` shall create an `UserDefinedServiceInterfaceDeployment`. It shall reference the VSS associated `ServiceInterface` through a `ServiceInterfaceARRef`]

### [AP\_TR\_VSS\_05215] User Defined VISS Service Instance

*Status:* DRAFT

[For each `UserDefinedServiceInterfaceDeployment` that reflects a VSS derived service interface the `VSS Importer` shall create an `AdminData`. Each `AdminData` shall contain a Special Data Group `Sdg` with the gid suffixed by `ProvidedVISS-BinindServiceInstanceExtension`. The `SpecialDataGroup` shall contain a Special Data Group `Sdg` with Gid set to `userDefinedVISSBinding`. This in turn shall contain a Special Data Group `Sdg` with Gid set to `ProvidedVISSBindingServiceInstance`. This in turn shall contain a Special Data `Sd` with Gid `vssInstancePath` and the value set to the VSS instance path in dot notation.]

See example A.16 for an example of VISS specific `UserDefinedServiceInterfaceDeployments`.

### [AP\_TR\_VSS\_05211] VISS/VSS Field Deployments

*Status:* DRAFT

[For each VSS based Service Field the `VSS Importer` shall create an `UserDefinedFieldDeployment` that references the associated field.]

### [AP\_TR\_VSS\_05212] VISS/VSS Set Method Deployments

*Status:* DRAFT

[For each VSS based Service setter method the `VSS Importer` shall create an `UserDefinedMethodDeployment` that references the associated set method. The short name shall follow the pattern `set<Shortname>(<Datatype>.)`.]

### [AP\_TR\_VSS\_05213] VISS/VSS Field Get Deployments

*Status:* DRAFT

[For each `UserDefinedFieldDeployment` the `VSS Importer` shall create a `UserDefinedMethodDeployment` for a get which shall have the short name `get<FieldName>.`]

**[AP\_TR\_VSS\_05214] VISS/VSS Field Notifier Deployments**

*Status:* DRAFT

For each `UserDefinedFieldDeployment` the `VSS Importer` shall create a `UserDefinedEventDeployment` for set which shall have the short name on<FieldName>.]

## 6.5 Provided Service Instance

**[AP\_TR\_VSS\_05220] Provided Service Instance Package Structure**

*Status:* DRAFT

For each VSS Branch the `VSS Importer` shall create an `ARPackage`. All child VSS Branches are child `ARPackage`s in AUTOSAR. The modelling of `ProvidedVISServiceInstance` packages differs from the data type modelling since instances of branches are modelled as additional `ARPackage`s.]

**[AP\_TR\_VSS\_05221] Provided Service Instance**

*Status:* DRAFT

For each VSS node instance that reflects a VSS derived service interface the `VSS Importer` shall produce a `ProvidedUserDefinedServiceInstance`. The short name shall be equal to the service name. The `ProvidedUserDefinedServiceInstance` parent `ARPackage` shall be set by the `VSS Importer` to the branch instance `ARPackage`. The `VSS Importer` shall reference the corresponding VISS service interface deployment through the `serviceInterfaceDeployment` property.]

See example A.17 for an example of VISS specific `UserDefinedServiceInterfaceDeployments`.

**[AP\_TR\_VSS\_05222] Provided Service Instance VSS Path**

*Status:* DRAFT

The `VSS Importer` shall set the `vssInstancePath` property of `ProvidedUserDefinedServiceInstance` of the model extension to the fully qualified VSS instance path.]

**[AP\_TR\_VSS\_05223] Provided Service Instance Deployment Reference**


*Status:* DRAFT

The `VSS Importer` shall set the `serviceInterfaceDeployment` reference of `ProvidedUserDefinedServiceInstance` to the `UserDefinedServiceInterfaceDeployment`.]

## 7 Automotive API Gateway


This section outlines the modelling portions of the Automotive API Gateway.

The goal is to provide a well-defined framework and abstraction on the application layer for mapping standard defined VSS/VISS interfaces and application data types to OEM provided vehicle internal interfaces and application data types. Its purpose is to hide transport implementation details in order to ease the mapping steps.

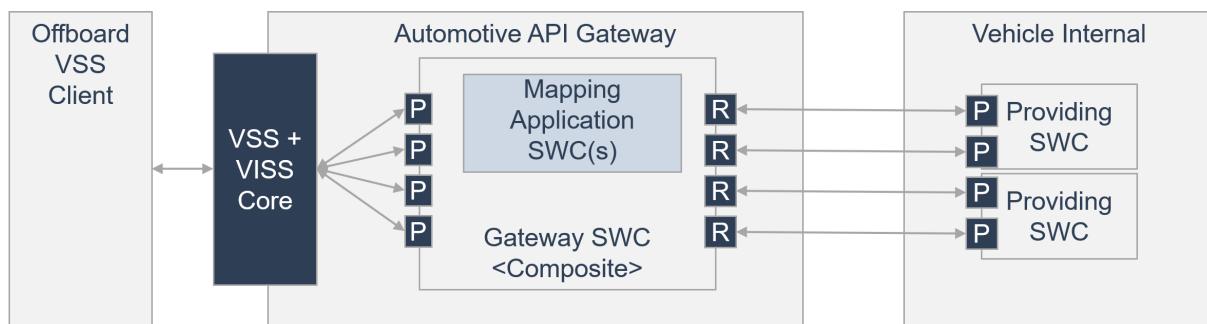

**Figure 7.1: Conceptual Depiction Automotive API Gateway**

The Automotive API Gateway provides an AUTOSAR compliant interface to provide VSS through VISS. Implementors must implement the provided skeletons. They may provide custom logic through Adaptive Applications to obtain VSS defined values to external entities, or they may utilize declarative approaches that utilize ARXML to describe the mapping of data entities.

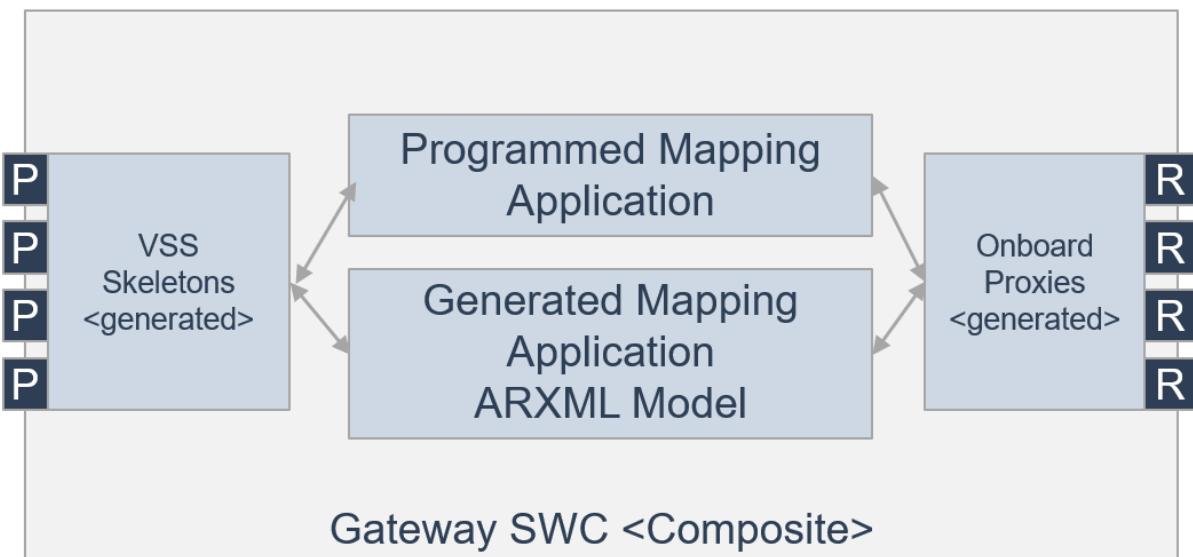

**Figure 7.2: Mapping Alternatives**

## 7.1 Gateway Software Component

The gateway software component models all VSS/VISS related provided ports per default. Providing the internal required ports are subject to an integration step. The VSS Representation does not generate required ports.

In case the gateway software component provides the whole catalog a single software component may suffice. However, there may be use cases where providing multiple gateways is reasonable for isolation purposes.

### [AP\_TR\_VSS\_05301] Gateway Software Component

*Status:* DRAFT

〔The [VSS Importer](#) shall produce one or more [CompositionSwComponentType](#) for the gateway. Producing one or more [CompositionSwComponentType](#) is import specific and may be determined by implementation specific import configuration.〕

### [AP\_TR\_VSS\_05302] Provided Ports Prototype

*Status:* DRAFT

〔The [VSS Importer](#) shall produce a [PPortPrototype](#) for each [Provide-dUserDefinedServiceInstance](#). Producing one or more [PPortPrototype](#) for one or more gateway software component is import specific and may be determined by implementation specific import configuration.〕

### [AP\_TR\_VSS\_05303] Provided Ports Prototype Short Name

*Status:* DRAFT

〔The [PPortPrototype](#) short name shall be the VSS instance path where ‘.’ is to be replaced with underscores. If the VSS path is longer than 128 characters the last 40 characters shall be replaced with the 20 bytes of an SHA1 hash encoded as hexadecimal value of the entire VSS instance path after the replacement with underscores.〕

### [AP\_TR\_VSS\_05306] Provided Ports Prototype Long Name

*Status:* DRAFT

〔The [VSS Importer](#) shall produce a [LLongName](#). The [VSS Importer](#) shall produce a [MultilanguageLongName](#) with the [LLongName](#) as its parent. The L attribute shall be set to FOR-ALL. The value shall be the VSS instance path where ‘.’ is to be replaced with underscores.〕

### [AP\_TR\_VSS\_05304] Provided Interface

*Status:* DRAFT

〔The [VSS Importer](#) shall produce a [PortInterfaceARRef](#) reference to the respective VSS derived service interface type as providedInterface attribute of the [PPortPrototype](#).〕

**[AP\_TR\_VSS\_05305] Service Instance to Port Prototype Mapping**

*Status:* DRAFT

For each VSS derived service instance the [VSS Importer](#) shall produce a [ServiceInstanceToPortPrototypeMapping](#). The short name of the element shall be set to <servicename>Mapping. The [VSS Importer](#) shall reference the corresponding portPrototype and the corresponding service instance.]

# A Appendix

## A.1 Mentioned Manifest Elements

This section contains the Manifest Elements mentioned in this documentation. It also contains a set of class tables representing meta-classes mentioned in the context of this document but which are not contained directly in the scope of describing specific meta-model semantics.

<b>Class</b>	<b>ARPackage</b>			
<b>Package</b>	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::ARPackage			
<b>Note</b>	AUTOSAR package, allowing to create top level packages to structure the contained ARElements. ARPackages are open sets. This means that in a file based description system multiple files can be used to partially describe the contents of a package. This is an extended version of MSR's SW-SYSTEM.			
<b>Base</b>	ARObject, AtpBlueprint, AtpBlueprintable, CollectableElement, <i>Identifiable</i> , MultilanguageReferrable, Referrable			
<b>Aggregated by</b>	ARPackage.arPackage, AUTOSAR.arPackage			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
arPackage	ARPackage	*	aggr	<p>This represents a sub package within an ARPackage, thus allowing for an unlimited package hierarchy.</p> <p><b>Stereotypes:</b> atpSplitable; atpVariation  <b>Tags:</b>  atp.Splitkey=arPackage.shortName, arPackage.variation  Point.shortLabel  vh.latestBindingTime=blueprintDerivationTime  xml.sequenceOffset=30</p>
element	PackageableElement	*	aggr	<p>Elements that are part of this package</p> <p><b>Stereotypes:</b> atpSplitable; atpVariation  <b>Tags:</b>  atp.Splitkey=element.shortName, element.variation  Point.shortLabel  vh.latestBindingTime=systemDesignTime  xml.sequenceOffset=20</p>
referenceBase	ReferenceBase	*	aggr	<p>This denotes the reference bases for the package. This is the basis for all relative references within the package. The base needs to be selected according to the base attribute within the references.</p> <p><b>Stereotypes:</b> atpSplitable  <b>Tags:</b>  atp.Splitkey=referenceBase.shortLabel  xml.sequenceOffset=10</p>

**Table A.1: ARPackage**

<b>Class</b>	AdminData			
<b>Package</b>	M2::MSR::AsamHdo::AdminData			
<b>Note</b>	<p>AdminData represents the ability to express administrative information and custom extensions for an element. This administration information is to be treated as meta-data such as revision id or state of the file. There are basically the following kinds of meta-data</p> <ul style="list-style-type: none"> <li>• The language and/or used languages.</li> <li>• Revision information covering e.g. revision number, state, release date, changes. Note that this information can be given in general as well as related to a particular company.</li> <li>• Document meta-data specific for a company</li> </ul> <p>Beside that a custom extension of model-data is possible by</p> <ul style="list-style-type: none"> <li>• Special data</li> </ul>			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	AUTOSAR.adminData, Describable.adminData, <i>Identifiable.adminData</i>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
docRevision (ordered)	DocRevision	*	aggr	<p>This allows to denote information about the current revision of the object.</p> <p>Note that information about previous revisions can also be logged here. The entries shall be sorted descendant by date in order to reflect the history. Therefore the most recent entry representing the current version is denoted first.</p> <p><b>Tags:</b>          xml.roleElement=true          xml.roleWrapperElement=true          xml.sequenceOffset=50          xml.typeElement=false          xml.typeWrapperElement=false       </p>
language	LEnum	0..1	attr	<p>This attribute specifies the master language of the document or the document fragment. The master language is the one in which the document is maintained and from which the other languages are derived from. In particular in case of inconsistencies, the information in the master language is priority.</p> <p><b>Tags:</b> xml.sequenceOffset=20</p>
sdg	Sdg	*	aggr	<p>This property allows to keep special data which is not represented by the standard model. It can be utilized to keep e.g. tool specific data.</p> <p><b>Stereotypes:</b> atpSplittable  <b>Tags:</b>          atp.Splitkey=sdg.sdgCaption.shortName          xml.roleElement=true          xml.roleWrapperElement=true          xml.sequenceOffset=60          xml.typeElement=false          xml.typeWrapperElement=false       </p>
usedLanguages	MultiLanguagePlainText	0..1	aggr	<p>This property specifies the languages which are provided in the document. Therefore it should only be specified in the top level admin data. For each language provided in the document there is one entry in MultiLanguagePlainText. The content of each entry can be used for illustration of the language. The used language itself depends on the language attribute in the entry.</p> <p><b>Tags:</b> xml.sequenceOffset=30</p>

**Table A.2: AdminData**

<b>Class</b>	<b>ApplicationArrayType</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	An application data type which is an array, each element is of the same application data type. <b>Tags:</b> atp.recommendedPackage=ApplicationDataTypes			
<b>Base</b>	ARElement, AROObject, ApplicationCompositeDataType, <a href="#">ApplicationDataType</a> , AtpBlueprint, Atp Blueprintable, AtpClassifier, AtpType, AutosarDataType, CollectableElement, <a href="#">Identifiable</a> , Multilanguage Referrable, PackageableElement, Referrable			
<b>Aggregated by</b>	<a href="#">ARPackage.element</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
dynamicArray SizeProfile	String	0..1	attr	Specifies the profile which the array will follow if it is a variable size array.
element	ApplicationArray Element	0..1	aggr	This association implements the concept of an array element. That is, in some cases it is necessary to be able to identify single array elements, e.g. as input values for an interpolation routine.

**Table A.3: ApplicationArrayType**

<b>Class</b>	<b>ApplicationDataType</b> (abstract)			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	ApplicationDataType defines a data type from the application point of view. Especially it should be used whenever something "physical" is at stake.  An ApplicationDataType represents a set of values as seen in the application model, such as measurement units. It does not consider implementation details such as bit-size, endianess, etc.  It should be possible to model the application level aspects of a VFB system by using ApplicationData Types only.			
<b>Base</b>	ARElement, AROObject, AtpBlueprint, Atp Blueprintable, AtpClassifier, AtpType, AutosarDataType, CollectableElement, <a href="#">Identifiable</a> , MultilanguageReferrable, PackageableElement, Referrable			
<b>Subclasses</b>	<a href="#">ApplicationCompositeDataType</a> , <a href="#">ApplicationPrimitiveDataType</a>			
<b>Aggregated by</b>	<a href="#">ARPackage.element</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
-	-	-	-	-

**Table A.4: ApplicationDataType**

<b>Class</b>	<b>ApplicationPrimitiveDataType</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	A primitive data type defines a set of allowed values. <b>Tags:</b> atp.recommendedPackage=ApplicationDataTypes			
<b>Base</b>	ARElement, AROObject, <a href="#">ApplicationDataType</a> , AtpBlueprint, Atp Blueprintable, AtpClassifier, AtpType, AutosarDataType, CollectableElement, <a href="#">Identifiable</a> , MultilanguageReferrable, PackageableElement, Referrable			
<b>Aggregated by</b>	<a href="#">ARPackage.element</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
-	-	-	-	-

**Table A.5: ApplicationPrimitiveDataType**

<b>Class</b>	<b>ApplicationRecordDataType</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	An application data type which can be decomposed into prototypes of other application data types. <b>Tags:</b> atp.recommendedPackage=ApplicationDataTypes			
<b>Base</b>	ARElement, ARObject, ApplicationCompositeDataType, <a href="#">ApplicationDataType</a> , AtpBlueprint, Atp Blueprintable, AtpClassifier, AtpType, AutosarDataType, CollectableElement, <a href="#">Identifiable</a> , Multilanguage Referrable, PackageableElement, Referrable			
<b>Aggregated by</b>	<a href="#">ARPackage.element</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
element (ordered)	<a href="#">ApplicationRecordElement</a>	*	aggr	<p>Specifies an element of a record.</p> <p>The aggregation of ApplicationRecordElement is subject to variability with the purpose to support the conditional existence of elements inside a ApplicationrecordData Type.</p> <p><b>Stereotypes:</b> atpSplitable; atpVariation</p> <p><b>Tags:</b> atp.Splitkey=element.shortName, element.variation Point.shortLabel vh.latestBindingTime=preCompileTime</p>

**Table A.6: ApplicationRecordDataType**

<b>Class</b>	<b>ApplicationRecordElement</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::DataPrototypes			
<b>Note</b>	Describes the properties of one particular element of an application record data type.			
<b>Base</b>	ARObject, ApplicationCompositeElementDataPrototype, AtpFeature, AtpPrototype, DataPrototype, <a href="#">Identifiable</a> , MultilanguageReferrable, Referrable			
<b>Aggregated by</b>	<a href="#">ApplicationRecordDataType.element</a> , AtpClassifier.atpFeature			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
isOptional	Boolean	0..1	attr	<p>This attribute represents the ability to declare the enclosing ApplicationRecordElement as optional. This means that, at runtime, the ApplicationRecord Element may or may not have a valid value and shall therefore be ignored.</p> <p>The underlying runtime software provides means to set the ApplicationRecordElement as not valid at the sending end of a communication and determine its validity at the receiving end.</p>

**Table A.7: ApplicationRecordElement**

<b>Class</b>	<b>ClientServerOperation</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::PortInterface			
<b>Note</b>	An operation declared within the scope of a client/server interface.			
<b>Base</b>	ARObject, AtpClassifier, AtpFeature, AtpStructureElement, <a href="#">Identifiable</a> , MultilanguageReferrable, Referrable			
<b>Aggregated by</b>	ApplicationInterface.command, AtpClassifier.atpFeature, ClientServerInterface.operation, Diagnostic DataElementInterface.read, DiagnosticDataIdentifierInterface.read, DiagnosticDataIdentifierInterface.write, DiagnosticRoutineInterface.requestResult, DiagnosticRoutineInterface.start, DiagnosticRoutine Interface.stop, PhmRecoveryActionInterface.recovery, <a href="#">ServiceInterface.method</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>





Class	ClientServerOperation			
argument (ordered)	ArgumentDataPrototype	*	aggr	An argument of this ClientServerOperation  <b>Stereotypes:</b> atpSplittable; atpVariation <b>Tags:</b> atp.Splitkey=argument.shortName, argument.variation Point.shortLabel vh.latestBindingTime=blueprintDerivationTime
fireAndForget	Boolean	0..1	attr	This attribute defines whether this method is a fire&forget method (true) or not (false).
possibleApError	ApApplicationError	*	ref	This reference identifies AdaptivePlatformApplication Errors as a possible error raised by the enclosing Client ServerOperation.
possibleApError Set	ApApplicationErrorSet	*	ref	This reference represents the ability to refer to an entire group of ApApplicationErrors as one model element instead of having to refer to all the represented Ap ApplicationErrors separately.

**Table A.8: ClientServerOperation**

Class	CompositionSwComponentType			
Package	M2::AUTOSARTemplates::SWComponentTemplate::Composition			
Note	A CompositionSwComponentType aggregates SwComponentPrototypes (that in turn are typed by SwComponentTypes) as well as SwConnectors for primarily connecting SwComponentPrototypes among each others and towards the surface of the CompositionSwComponentType. By this means, a hierarchical structures of software-components can be created.  <b>Tags:</b> atp.recommendedPackage=SwComponentTypes			
Base	ARElement, ARObject, AtpBlueprint, AtpBlueprintable, AtpClassifier, AtpType, CollectableElement, Identifiable, MultilanguageReferrable, PackageableElement, Referrable, SwComponentType			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note
component	SwComponent Prototype	*	aggr	The instantiated components that are part of this composition.  <b>Stereotypes:</b> atpSplittable; atpVariation <b>Tags:</b> atp.Splitkey=component.shortName, component.variation Point.shortLabel vh.latestBindingTime=postBuild
connector	SwConnector	*	aggr	SwConnectors have the principal ability to establish a connection among PortPrototypes. They can have many roles in the context of a CompositionSwComponentType. Details are refined by subclasses.  The aggregation of SwConnectors is subject to variability with the purpose to support variant data flow.  The aggregation is marked as atpSplittable in order to allow the extension of the ECU extract with AssemblySwConnectors between ApplicationSwComponentTypes and ServiceSwComponentTypes during the ECU integration.  <b>Stereotypes:</b> atpSplittable; atpVariation <b>Tags:</b> atp.Splitkey=connector.shortName, connector.variation Point.shortLabel vh.latestBindingTime=postBuild





Class	CompositionSwComponentType			
constantValueMapping	ConstantSpecificationMappingSet	*	ref	Reference to the ConstantSpecificationMapping to be applied for initValues of PPortComSpecs and RPortComSpec.  <b>Stereotypes:</b> atpSplittable <b>Tags:</b> atp.Splitkey=constantValueMapping
dataTypeMapping	<a href="#">DataTypeMappingSet</a>	*	ref	Reference to the DataTypeMapping to be applied for the used <a href="#">ApplicationDataTypes</a> in <a href="#">ServiceInterfaces</a> .  <b>Stereotypes:</b> atpSplittable <b>Tags:</b> atp.Splitkey=dataTypeMapping
physicalDimensionMapping	PhysicalDimensionMappingSet	0..1	ref	This reference identifies the PhysicalDimensionMappingSet that is applicable in the context of the enclosing <a href="#">CompositionSwComponentType</a> . The PhysicalDimensionMappings contained in the PhysicalDimensionMappingSet shall be taken into account for the assessment of the compatibility of PhysicalDimensions in the context of creation of a PortInterfaceMapping in the scope of the <a href="#">CompositionSwComponentType</a> .

**Table A.9: CompositionSwComponentType**

Class	CompuConst			
Package	M2::MSR::AsamHdo::ComputationMethod			
Note	This meta-class represents the fact that the value of a computation method scale is constant.			
Base	<a href="#">ARObject</a>			
Aggregated by	<a href="#">Compu.compuDefaultValue</a> , <a href="#">CompuScale.compuInverseValue</a> , <a href="#">CompuScaleConstantContents.compuConst</a>			
Attribute	Type	Mult.	Kind	Note
compuConstContentType	CompuConstContent	0..1	aggr	<p>This is the actual content of the constant compu method scale.</p> <p><b>Tags:</b>  <code>xml.roleElement=false</code>  <code>xml.roleWrapperElement=false</code>  <code>xml.sequenceOffset=10</code>  <code>xml.typeElement=false</code>  <code>xml.typeWrapperElement=false</code> </p>

**Table A.10: CompuConst**

Class	CompuMethod			
Package	M2::MSR::AsamHdo::ComputationMethod			
Note	<p>This meta-class represents the ability to express the relationship between a physical value and the mathematical representation.</p> <p>Note that this is still independent of the technical implementation in data types. It only specifies the formula how the internal value corresponds to its physical pendant.</p> <p><b>Tags:</b> atp.recommendedPackage=CompuMethods</p>			
Base	<a href="#">ARElement</a> , <a href="#">ARObject</a> , <a href="#">AtpBlueprint</a> , <a href="#">AtpBlueprintable</a> , <a href="#">CollectableElement</a> , <a href="#">Identifiable</a> , <a href="#">MultilanguageReferrable</a> , <a href="#">PackageableElement</a> , <a href="#">Referrable</a>			
Aggregated by	<a href="#">ARPackage.element</a>			
Attribute	Type	Mult.	Kind	Note





Class	CompuMethod			
compulInternalToPhys	Compu	0..1	aggr	<p>This specifies the computation from internal values to physical values.</p> <p><b>Stereotypes:</b> atpSplittable</p> <p><b>Tags:</b> atp.Splitkey=compulInternalToPhys xml.sequenceOffset=80</p>
compuPhysToInternal	Compu	0..1	aggr	<p>This represents the computation from physical values to the internal values.</p> <p><b>Stereotypes:</b> atpSplittable</p> <p><b>Tags:</b> atp.Splitkey=compuPhysToInternal xml.sequenceOffset=90</p>
displayFormat	DisplayFormatString	0..1	attr	<p>This property specifies, how the physical value shall be displayed e.g. in documents or measurement and calibration tools.</p> <p><b>Tags:</b> xml.sequenceOffset=20</p>
unit	Unit	0..1	ref	<p>This is the physical unit of the Physical values for which the CompuMethod applies.</p> <p><b>Tags:</b> xml.sequenceOffset=30</p>

**Table A.11: CompuMethod**

Class	CompuScale			
Package	M2::MSR::AsamHdo::ComputationMethod			
Note	This meta-class represents the ability to specify one segment of a segmented computation method.			
Base	ARObject			
Aggregated by	CompuScales.compuScale			
Attribute	Type	Mult.	Kind	Note
a2IDisplayText	String	0..1	attr	<p>The value of this attribute shall be taken for generating one display text (specifically the OutVal) within the equivalent of the enclosing CompuMethod in A2L.</p>
compulInverseValue	CompuConst	0..1	aggr	<p>This is the inverse value of the constraint. This supports the case that the scale is not reversible per se.</p> <p><b>Tags:</b> xml.sequenceOffset=60</p>
compuScaleContents	CompuScaleContents	0..1	aggr	<p>This represents the computation details of the scale.</p> <p><b>Tags:</b> xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=70 xml.typeElement=false xml.typeWrapperElement=false</p>
desc	MultiLanguageOverviewParagraph	0..1	aggr	<p>&lt;desc&gt; represents a general but brief description of the object in question.</p> <p><b>Tags:</b> xml.sequenceOffset=30</p>
lowerLimit	Limit	0..1	attr	<p>This specifies the lower limit of the scale.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=preCompileTime xml.sequenceOffset=40</p>





Class	CompuScale			
mask	PositiveUnlimitedInteger	0..1	attr	<p>In difference to all the other computational methods every COMPU-SCALE will be applied including the bit MASK. Therefore it is allowed for this type of COMPU-METHOD, that COMPU-SCALES overlap.</p> <p>To calculate the string reverse to a value, the string has to be split and the according value for each substring has to be summed up. The sum is finally transmitted.</p> <p>The processing has to be done in order of the COMPU-SCALE elements.</p> <p><b>Tags:</b> xml.sequenceOffset=35</p>
shortLabel	Identifier	0..1	attr	<p>This element specifies a short name for the particular scale. The name can for example be used to derive a programming language identifier.</p> <p><b>Tags:</b> xml.sequenceOffset=20</p>
symbol	CIdentifier	0..1	attr	<p>The symbol, if provided, is used by code generators to get a C identifier for the CompuScale. The name will be used as is for the code generation, therefore it needs to be unique within the generation context.</p> <p><b>Tags:</b> xml.sequenceOffset=25</p>
upperLimit	Limit	0..1	attr	<p>This specifies the upper limit of a of the scale.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=preCompileTime xml.sequenceOffset=50</p>

**Table A.12: CompuScale**

Class	CppTemplateArgument			
Package	M2::AUTOSARTemplates::AdaptivePlatform::ApplicationDesign::CpplImplementationDataType			
Note	This meta-class has the ability to define properties for template arguments.			
Base	ARObject			
Aggregated by	CpplImplementationDataType.templateArgument			
Attribute	Type	Mult.	Kind	Note
allocator	Allocator	0..1	ref	This reference identifies the applicable allocator.
category	CategoryString	0..1	attr	This attribute shall be used to contribute further clarification regarding the semantics of the enclosing Cpp TemplateArgument.
inplace	Boolean	0..1	attr	This attribute specifies whether the shortName of the referenced templateType is used in the code generation and the type declaration is defined outside of the enclosing CpplImplementationDataType (true) or whether the type definition is embedded inside of the enclosing CpplImplementationDataType and the shortName is ignored (false).
templateType	CpplImplementation DataType	0..1	ref	This reference identifies the data type of the specific template argument required for the language binding.

**Table A.13: CppTemplateArgument**

<b>Class</b>	<b>DataTypeMap</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	This class represents the relationship between ApplicationDataType and its implementing AbstractImplementationDataType.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	<a href="#">DataTypeMappingSet.dataTypeMap</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
applicationData Type	<a href="#">ApplicationDataType</a>	0..1	ref	This is the corresponding ApplicationDataType
implementation DataType	AbstractImplementation DataType	0..1	ref	This is the corresponding AbstractImplementationDataType.

**Table A.14: DataTypeMap**

<b>Class</b>	<b>DataTypeMappingSet</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Datatype::Datatypes			
<b>Note</b>	This class represents a list of mappings between ApplicationDataTypes and ImplementationDataTypes. In addition, it can contain mappings between ImplementationDataTypes and ModeDeclarationGroups. <b>Tags:</b> atp.recommendedPackage=DataTypeMappingSets			
<b>Base</b>	ARElement, ARObject, AtpBlueprint, AtpBlueprintable, CollectableElement, <a href="#">Identifiable</a> , MultilanguageReferrable, PackageableElement, Referrable			
<b>Aggregated by</b>	<a href="#">ARPackage.element</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
dataTypeMap	<a href="#">DataTypeMap</a>	*	aggr	This is one particular association between an ApplicationDataType and its AbstractImplementationDataType.
modeRequest TypeMap	ModeRequestTypeMap	*	aggr	This is one particular association between an ModeDeclarationGroup and its AbstractImplementationDataType.

**Table A.15: DataTypeMappingSet**

<b>Class</b>	<b>«atpMixed» DocumentationBlock</b>			
<b>Package</b>	M2::MSR::Documentation::BlockElements			
<b>Note</b>	This class represents a documentation block. It is made of basic text structure elements which can be displayed in a table cell.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	ApplicabilityInfo.remark, AUTOSAR.introduction, BlueprintGenerator.introduction, <a href="#">BlueprintPolicyModifiable</a> .blueprintDerivationGuide, ClientServerOperationBlueprintMapping.blueprintMappingGuide, <a href="#">DataMapping</a> .introduction, DefItem.def, <a href="#">Describable</a> .introduction, EcucAddlInfoParamValue.value, EcuResourceEstimation.introduction, Entry.entryContents, FrameMapping.introduction, <a href="#">GeneralAnnotation</a> .annotationText, <a href="#">Identifiable</a> .introduction, IPduMapping.introduction, ISignalMapping.introduction, Item.itemContents, LabeledItem.itemContents, LifeCycleInfo.remark, <a href="#">MappingConstraint</a> .introduction, MsrQueryP2.msrQueryResultP2, <a href="#">Note.noteText</a> , PortDefinedArgumentBlueprint.blueprintMappingGuide, PrmChar.cond, PrmChar.remark, ScheduleTableEntry.introduction, SignalPathConstraint.introduction, StructuredReq.conflicts, StructuredReq.dependencies, StructuredReq.description, StructuredReq.rationale, StructuredReq.remark, StructuredReq.supportingMaterial, StructuredReq.useCase, SwAxisType.swGenericAxisDesc, TopicContent.blockLevelContent, TraceableText.text, VariationPoint.blueprintCondition			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>





«atpMixed» DocumentationBlock				
Class				
defList	DefList	0..1	aggr	<p>This represents a definition list in the documentation block.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=40</p>
figure	MIFigure	0..1	aggr	<p>This represents a figure in the documentation block.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=70</p>
formula	MIFormula	0..1	aggr	<p>This is a formula in the definition block.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=60</p>
labeledList	LabeledList	0..1	aggr	<p>This represents a labeled list.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=50</p>
list	List	0..1	aggr	<p>This represents numbered or unnumbered list.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=30</p>
msrQueryP2	MsrQueryP2	0..1	aggr	<p>This represents automatically contributed contents provided by an msrquery in the context of Documentation Block.</p>
note	Note	0..1	aggr	<p>This represents a note in the text flow.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=80</p>
p	MultiLanguage Paragraph	0..1	aggr	<p>This is one particular paragraph.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=10</p>
structuredReq	StructuredReq	0..1	aggr	<p>This aggregation supports structured requirements embedded in a documentation block.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=100</p>
trace	TraceableText	0..1	aggr	<p>This represents traceable text in the documentation block. This allows to specify requirements/constraints in any documentation block.</p> <p>The kind of the trace is specified in the category.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=postBuild xml.sequenceOffset=90</p>





<b>Class</b>	«atpMixed» <b>DocumentationBlock</b>			
verbatim	MultiLanguageVerbatim	0..1	aggr	<p>This represents one particular verbatim text.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b></p> <ul style="list-style-type: none"> <li>vh.latestBindingTime=postBuild</li> <li>xml.sequenceOffset=20</li> </ul>

**Table A.16: DocumentationBlock**

<b>Class</b>	<b>Field</b>			
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ApplicationDesign::PortInterface			
<b>Note</b>	This meta-class represents the ability to define a piece of data that can be accessed with read and/or write semantics. It is also possible to generate a notification if the value of the data changes.			
<b>Base</b>	<i>ARObject, AtpFeature, AtpPrototype, AutosarDataPrototype, DataPrototype, Identifiable, MultilanguageReferrable, Referrable</i>			
<b>Aggregated by</b>	ApplicationInterface.attribute, AtpClassifier.atpFeature, ServiceInterface.field			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
hasGetter	Boolean	0..1	attr	This attribute controls whether read access is foreseen to this field.
hasNotifier	Boolean	0..1	attr	This attribute controls whether a notification semantics is foreseen to this field.
hasSetter	Boolean	0..1	attr	This attribute controls whether write access is foreseen to this field.

**Table A.17: Field**

<b>Class</b>	<b>Identifiable</b> (abstract)
<b>Package</b>	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::Identifiable
<b>Note</b>	Instances of this class can be referred to by their identifier (within the namespace borders). In addition to this, Identifiables are objects which contribute significantly to the overall structure of an AUTOSAR description. In particular, Identifiables might contain Identifiables.
<b>Base</b>	<i>ARObject, MultilanguageReferrable, Referrable</i>
<b>Subclasses</b>	<i>ARPackage, AbstractDolpLogicAddressProps, AbstractEvent, AbstractFunctionalClusterDesign, AbstractImplementationDataTypeElement, AbstractSecurityEventFilter, AbstractSecurityIdsmInstanceFilter, AbstractServiceInstance, AbstractSignalBasedToSignalTriggeringMapping, AdaptiveSwcInternalBehavior, ApApplicationEndpoint, ApmcAbstractDefinition, ApmcConfigurationElementDef, ApmcContainerElementValue, ApmcContainerValue, ApmcEnumerationLiteralDef, ApplicationEndpoint, ApplicationError, AppliedStandard, ArtifactChecksum, ArtifactLocator, AtpBlueprint, AtpBlueprintable, AtpClassifier, AtpFeature, AutosarOperationArgumentInstance, AutosarVariableInstance, BuildActionEntity, BuildActionEnvironment, Chapter, CheckpointTransition, ClassContentConditional, ClientIdDefinition, ClientServerOperation, Code, CollectableElement, ComManagementMapping, CommConnectorPort, CommunicationConnector, CommunicationController, Compiler, ConsistencyNeeds, ConsumedEventGroup, CouplingPort, CouplingPortAbstractShaper, CouplingPortStructuralElement, CryptoCertificate, CryptoKeySlot, CryptoKeySlotDesign, CryptoKeySlotUsageDesign, CryptoProvider, CryptoServiceMapping, DataPrototypeGroup, DataPrototypeTransformationPropsIdent, DataTransformation, DdsCpDomain, DdsCpPartition, DdsCpQosProfile, DdsCpTopic, DdsDomainRange, DependencyOnArtifact, DiagEventDebounceAlgorithm, DiagnosticAuthTransmitCertificateEvaluation, DiagnosticConnectedIndicator, DiagnosticDataElement, DiagnosticDebounceAlgorithmProps, DiagnosticFunctionInhibitSource, DiagnosticParameterElement, DiagnosticRoutineSubfunction, DiagnosticSovdMethodPrimitive, DltApplication, DltArgument, DltMessage, DolpInterface, DolpLogicAddress, DolpLogicalAddress, DolpNetworkConfigurationDesign, DolpRoutingActivation, E2EProfileConfiguration, End2EndEventProtectionProps, End2EndMethodProtectionProps, EndToEndProtection, EthernetWakeupSleepOnDatalineConfig, EventHandler, EventMapping, ExclusiveArea, ExecutableEntity, ExecutionTime, FMAttributeDef, FMFeatureMapAssertion, FMFeatureMapCondition, FMFeatureMapElement, FMFeatureRelation, FMFeatureRestriction, FMFeatureSelection, FieldMapping, FireAndForget</i>





Class	<b>Identifiable</b> (abstract)			
	MethodMapping, FlexrayArTpNode, FlexrayTpPduPool, <i>FrameTriggering</i> , GeneralParameter, GlobalSupervision, GlobalTimeGateway, <i>GlobalTimeMaster</i> , <i>GlobalTimeSlave</i> , HealthChannel, HeapUsage, HwAttributeDef, HwAttributeLiteralDef, HwPin, HwPinGroup, IEEE1722TpAcfBus, IEEE1722TpAcfBusPart, IPSecRule, IPv6ExtHeaderFilterList, ISignalToPduMapping, ISignalTriggering, IdentCaption, ImpositionTime, InternalTriggeringPoint, Keyword, LifeCycleState, Linker, MacAddressVlanMembership, MacMulticastGroup, MacSecKeyParticipant, McDataInstance, MemorySection, MemoryUsage, MethodMapping, ModeDeclaration, ModeDeclarationMapping, ModeSwitchPoint, NetworkEndpoint, NmCluster, NmNode, PackageableElement, ParameterAccess, PduActivationRoutingGroup, PduToFrameMapping, PduTriggering, PerInstanceMemory, PersistenceDeploymentElement, PersistenceInterfaceElement, PhmSupervision, PhysicalChannel, PortGroup, PortInterfaceMapping, ProcessToMachineMapping, Processor, ProcessorCore, PskIdentityToKeySlotMapping, ResourceConsumption, ResourceGroup, RootSwClusterDesignComponentPrototype, RootSwComponentPrototype, RootSwCompositionPrototype, RptComponent, RptContainer, RptExecutableEntity, RptExecutableEntityEvent, RptExecutionContext, RptProfile, RptServicePoint, RunnableEntityGroup, SdgAttribute, SdgClass, SecOcJobMapping, SecOcJobRequirement, SecureCommunicationAuthenticationProps, SecureCommunicationDeployment, SecureCommunicationFreshnessProps, SecurityEventContextDataElement, SecurityEventContextProps, ServiceEventDeployment, ServiceFieldDeployment, ServiceInterfaceElementSecureComConfig, ServiceMethodDeployment, ServiceNeeds, SignalServiceTranslationEventProps, SignalServiceTranslationProps, SocketAddress, SoftwarePackageStep, SomeipEventGroup, SomeipProvidedEventGroup, SomeipTpChannel, SpecElementReference, StackUsage, StateManagementActionItem, StateManagementActionList, StateManagementStateNotification, StateManagementStateRequest, StaticSocketConnection, StructuredReq, SupervisionCheckpoint, SupervisionMode, SupervisionModeCondition, SwGenericAxisParamType, SwServiceArg, SwcServiceDependency, SwitchAsynchronousTrafficShaperGroupEntry, SystemMapping, TimeBaseResource, TimingClock, TimingClockSyncAccuracy, TimingCondition, TimingConstraint, TimingDescription, TimingExtensionResource, TimingModelInstance, TlsCryptoCipherSuite, TlsCryptoCipherSuiteProps, TlsJobMapping, Topic1, TpAddress, TraceableTable, TraceableText, TracedFailure, TransformationSignalPropsIdent, TransformationProps, TransformationTechnology, Trigger, UcmDescription, UcmRetryStrategy, UcmStep, VariableAccess, VariationPointProxy, VehicleRolloutStep, ViewMap, VlanConfig, WaitPoint			
Attribute	Type	Mult.	Kind	Note
adminData	AdminData	0..1	aggr	<p>This represents the administrative data for the identifiable object.</p> <p><b>Stereotypes:</b> atpSplittable</p> <p><b>Tags:</b> atp.Splitkey=adminData xml.sequenceOffset=-40</p>
annotation	Annotation	*	aggr	<p>Possibility to provide additional notes while defining a model element (e.g. the ECU Configuration Parameter Values). These are not intended as documentation but are mere design notes.</p> <p><b>Tags:</b> xml.sequenceOffset=-25</p>
category	CategoryString	0..1	attr	<p>The category is a keyword that specializes the semantics of the Identifiable. It affects the expected existence of attributes and the applicability of constraints.</p> <p><b>Tags:</b> xml.sequenceOffset=-50</p>
desc	MultiLanguageOverviewParagraph	0..1	aggr	<p>This represents a general but brief (one paragraph) description what the object in question is about. It is only one paragraph! Desc is intended to be collected into overview tables. This property helps a human reader to identify the object in question.</p> <p>More elaborate documentation, (in particular how the object is built or used) should go to "introduction".</p> <p><b>Tags:</b> xml.sequenceOffset=-60</p>
introduction	DocumentationBlock	0..1	aggr	<p>This represents more information about how the object in question is built or is used. Therefore it is a DocumentationBlock.</p> <p><b>Tags:</b> xml.sequenceOffset=-30</p>





<b>Class</b>	<b>Identifiable</b> (abstract)			
uuid	String	0..1	attr	<p>The purpose of this attribute is to provide a globally unique identifier for an instance of a meta-class. The values of this attribute should be globally unique strings prefixed by the type of identifier. For example, to include a DCE UUID as defined by The Open Group, the UUID would be preceded by "DCE:". The values of this attribute may be used to support merging of different AUTOSAR models. The form of the UUID (Universally Unique Identifier) is taken from a standard defined by the Open Group (was Open Software Foundation). This standard is widely used, including by Microsoft for COM (GUIDs) and by many companies for DCE, which is based on CORBA. The method for generating these 128-bit IDs is published in the standard and the effectiveness and uniqueness of the IDs is not in practice disputed. If the id namespace is omitted, DCE is assumed. An example is "DCE:2fac1234-3118-11b4-a222-08002b34c003". The uuid attribute has no semantic meaning for an AUTOSAR model and there is no requirement for AUTOSAR tools to manage the timestamp.</p> <p><b>Tags:</b> xml.attribute=true</p>

**Table A.18: Identifiable**

<b>Primitive</b>	<b>Identifier</b>			
<b>Package</b>	M2::AUTOSARTemplates::GenericStructure::GeneralTemplateClasses::PrimitiveTypes			
<b>Note</b>	<p>An Identifier is a string with a number of constraints on its appearance, satisfying the requirements typical programming languages define for their Identifiers.</p> <p>This datatype represents a string, that can be used as a c-Identifier.</p> <p>It shall start with a letter, may consist of letters, digits and underscores.</p> <p><b>Tags:</b>          xml.xsd.customType=IDENTIFIER          xml.xsd.maxLength=128          xml.xsd.pattern=[a-zA-Z][a-zA-Z0-9_]*          xml.xsd.type=string</p>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
blueprintValue	String	0..1	attr	<p>This represents a description that documents how the value shall be defined when deriving objects from the blueprint.</p> <p><b>Tags:</b>          atp.Status=draft          xml.attribute=true</p>
namePattern	String	0..1	attr	<p>This attribute represents a pattern which shall be used to define the value of the identifier if the identifier in question is part of a blueprint.</p> <p>For more details refer to TPS_StandardizationTemplate.</p> <p><b>Tags:</b> xml.attribute=true</p>

**Table A.19: Identifier**

<b>Class</b>	«atpMixedString» <b>LLongName</b>			
<b>Package</b>	M2::MSR::Documentation::TextModel::LanguageDataModel			
<b>Note</b>	MixedContentForLongNames in one particular language. The language is denoted in the attribute l.			
<b>Base</b>	<i>ARObject, LanguageSpecific, MixedContentForLongName</i>			
<b>Aggregated by</b>	<a href="#">MultilanguageLongName.i4</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
blueprintValue	String	0..1	attr	<p>This represents a description that documents how the value shall be defined when deriving objects from the blueprint.</p> <p><b>Tags:</b> atp.Status=draft xml.attribute=true</p>

**Table A.20: LLongName**

<b>Class</b>	«atpMixedString» <b>LOverviewParagraph</b>			
<b>Package</b>	M2::MSR::Documentation::TextModel::LanguageDataModel			
<b>Note</b>	MixedContentForOverviewParagraph in one particular language. The language is denoted in the attribute l.			
<b>Base</b>	<i>ARObject, LanguageSpecific, MixedContentForOverviewParagraph</i>			
<b>Aggregated by</b>	<a href="#">IndentSample.i2, MultiLanguageOverviewParagraph.i2</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
blueprintValue	String	0..1	attr	<p>This represents a description that documents how the value shall be defined when deriving objects from the blueprint.</p> <p><b>Tags:</b> atp.Status=draft xml.attribute=true</p>

**Table A.21: LOverviewParagraph**

<b>Class</b>	«atpMixedString» <b>MixedContentForOverviewParagraph</b> (abstract)			
<b>Package</b>	M2::MSR::Documentation::TextModel::InlineTextModel			
<b>Note</b>	This is the text model of a restricted paragraph item within a documentation. Such restricted paragraphs are used mainly for overview items, e.g. desc.			
<b>Base</b>	<i>ARObject</i>			
<b>Subclasses</b>	<a href="#">LOverviewParagraph, SIOverviewParagraph</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
br	Br	1	aggr	<p>This element is the same as function here as in a HTML document i.e. it forces a line break.</p>
e	EmphasisText	1	aggr	<p>This is emphasis text.</p> <p><b>Tags:</b> xml.sequenceOffset=60</p>
ft	SIOverviewParagraph	1	aggr	This is a foot note within a paragraph.
ie	IndexEntry	1	aggr	<p>This is an index entry.</p> <p><b>Tags:</b> xml.sequenceOffset=100</p>
sub	Superscript	1	attr	<p>This is superscript text.</p> <p><b>Tags:</b> xml.sequenceOffset=90</p>
sup	Superscript	1	attr	<p>This is subscript text.</p> <p><b>Tags:</b> xml.sequenceOffset=80</p>





<b>Class</b>	«atpMixedString» <b>MixedContentForOverviewParagraph</b> (abstract)			
trace	Traceable	1	ref	This allows to place an arbitrary reference to a traceable object in documentation.
tt	Tt	1	aggr	This is a technical term. <b>Tags:</b> xml.sequenceOffset=30
xref	Xref	1	aggr	This is a cross reference. <b>Tags:</b> xml.sequenceOffset=40
xrefTarget	XrefTarget	1	aggr	This element specifies a reference target which can be scattered throughout the text. <b>Tags:</b> xml.sequenceOffset=50

**Table A.22: MixedContentForOverviewParagraph**

<b>Class</b>	<b>MultiLanguageOverviewParagraph</b>			
<b>Package</b>	M2::MSR::Documentation::TextModel::MultilanguageData			
<b>Note</b>	This is the content of a multilingual paragraph in an overview item.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	Caption.desc, CompuScale.desc, Describable.desc, Identifiable.desc, LabeledItem.itemLabel, Modification.change, Modification.reason, ScaleConstr.desc, SdgCaption.desc, SwRecordLayoutGroup.desc, SwRecordLayoutV.desc, VariationPoint.desc			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
l2	LOverviewParagraph	1..*	aggr	<p>This represents the text in one particular language.</p> <p><b>Tags:</b></p> <ul style="list-style-type: none"> <li>xml.roleElement=true</li> <li>xml.roleWrapperElement=false</li> <li>xml.sequenceOffset=20</li> <li>xml.typeElement=false</li> <li>xml.typeWrapperElement=false</li> </ul>

**Table A.23: MultiLanguageOverviewParagraph**

<b>Class</b>	<b>MultilanguageLongName</b>			
<b>Package</b>	M2::MSR::Documentation::TextModel::MultilanguageData			
<b>Note</b>	This meta-class represents the ability to specify a long name which acts in the role of a headline. It is intended for human readers. Per language it should be around max 80 characters.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	AliasNameAssignment.label, GeneralAnnotation.label, MultilanguageReferrable.longName, Note.label, Prms.label, ValueGroup.label			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
l4	LLongName	1..*	aggr	<p>This is the long name in one particular language.</p> <p><b>Tags:</b></p> <ul style="list-style-type: none"> <li>xml.roleElement=true</li> <li>xml.roleWrapperElement=false</li> <li>xml.sequenceOffset=20</li> <li>xml.typeElement=false</li> <li>xml.typeWrapperElement=false</li> </ul>

**Table A.24: MultilanguageLongName**

<b>Class</b>	<b>Note</b>			
<b>Package</b>	M2::MSR::Documentation::BlockElements::Note			
<b>Note</b>	<p>This represents a note in a documentation, which may be used to highlight specific issues such as hints or caution notes.</p> <p>N.B., Documentation notes can be nested recursively, even if this is not really intended. In case of nested notes e.g. the note icon of inner notes might be omitted while rendering the note.</p>			
<b>Base</b>	ARObject, DocumentViewSelectable, Paginateable			
<b>Aggregated by</b>	<a href="#">DocumentationBlock.note</a>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
label	<a href="#">MultilanguageLongName</a>	0..1	aggr	<p>This label can be used to supersede the default label specified by the noteType attribute. It is in particular useful for noteType="other".</p> <p><b>Tags:</b> xml.sequenceOffset=20</p>
noteText	<a href="#">DocumentationBlock</a>	1	aggr	<p>This is the text content of the note.</p> <p><b>Tags:</b>          xml.roleElement=false          xml.roleWrapperElement=false          xml.sequenceOffset=30          xml.typeElement=false          xml.typeWrapperElement=false       </p>
noteType	NoteTypeEnum	0..1	attr	<p>Type of the Note. Default is "HINT"</p> <p><b>Tags:</b> xml.attribute=true</p>

**Table A.25: Note**

<b>Class</b>	<b>PPortPrototype</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Components			
<b>Note</b>	Component port providing a certain port interface.			
<b>Base</b>	ARObject, AbstractProvidedPortPrototype, AtpBlueprintable, AtpFeature, AtpPrototype, <a href="#">Identifiable</a> , MultilanguageReferable, PortPrototype, Referrable			
<b>Aggregated by</b>	AtpClassifier.atpFeature, SwComponentType.port			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
provided Interface	PortInterface	0..1	tref	<p>The interface that this port provides.</p> <p><b>Stereotypes:</b> isOfType</p>

**Table A.26: PPortPrototype**

<b>Class</b>	<b>PhysConstrs</b>			
<b>Package</b>	M2::MSR::AsamHdo::Constraints::GlobalConstraints			
<b>Note</b>	This meta-class represents the ability to express physical constraints. Therefore it has (in opposite to InternalConstrs) a reference to a Unit.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	DataConstrRule.physConstrs			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
lowerLimit	Limit	0..1	attr	<p>This specifies the lower limit of the constraint.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b>          vh.latestBindingTime=preCompileTime          xml.sequenceOffset=20       </p>





Class	PhysConstrs			
maxDiff	Numerical	0..1	attr	Maximum difference that is permitted between two consecutive values if the constraint is applied to an axis. <b>Tags:</b> xml.sequenceOffset=60
maxGradient	Numerical	0..1	attr	This element specifies the maximum slope that may be used in curves and maps. <b>Tags:</b> xml.sequenceOffset=50
monotony	MonotonyEnum	0..1	attr	This specifies the monotony constraints on the data object. Note that this applies only to curves and maps. <b>Tags:</b> xml.sequenceOffset=70
scaleConstr (ordered)	ScaleConstr	*	aggr	This is one particular scale which contributes to the data constraints. <b>Tags:</b> atp.Status=obsolete xml.roleElement=true xml.roleWrapperElement=true xml.sequenceOffset=40 xml.typeElement=false xml.typeWrapperElement=false
unit	Unit	0..1	ref	This is the unit to which the physical constraints relate to. In particular, it is the physical unit of the specified limits. <b>Tags:</b> xml.sequenceOffset=80
upperLimit	Limit	0..1	attr	This specifies the upper limit of the constraint. <b>Stereotypes:</b> atpVariation <b>Tags:</b> vh.latestBindingTime=preCompileTime xml.sequenceOffset=30

**Table A.27: PhysConstrs**

Class	«atpMixedString» PositiveIntegerValueVariationPoint			
Package	M2::AUTOSARTemplates::GenericStructure::VariantHandling::AttributeValueVariationPoints			
Note	This class represents an attribute value variation point for positive Integer attributes. Note that this class might be used in the extended meta-model only.			
Base	ARObject, AttributeValueVariationPoint, FormulaExpression, SwSystemconstDependentFormula			
Aggregated by	VariationPointProxy.valueAccess			
Attribute	Type	Mult.	Kind	Note
-	-	-	-	-

**Table A.28: PositiveIntegerValueVariationPoint**

Class	ProvidedUserDefinedServiceInstance			
Package	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInstanceDeployment			
Note	This meta-class represents the ability to describe the existence and configuration of a provided service instance in a concrete implementation that is not standardized by AUTOSAR. <b>Tags:</b> atp.recommendedPackage=ServiceInstances			
Base	ARElement, ARObject, AdaptivePlatformServiceInstance, CollectableElement, Identifiable, MultilanguageReferable, PackageableElement, ProvidedApServiceInstance, Referrable, UploadableDesignElement, UploadablePackageElement			
Aggregated by	ARPackage.element			





<b>Class</b>	ProvidedUserDefinedServiceInstance			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
-	-	-	-	-

**Table A.29: ProvidedUserDefinedServiceInstance**

<b>Class</b>	<b>Sd</b>			
<b>Package</b>	M2::MSR::AsamHdo::SpecialData			
<b>Note</b>	This class represents a primitive element in a special data group.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	SdgContents.sd			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
gid	NameToken	1	attr	<p>This attributes specifies an identifier. Gid comes from the SGML/XML-Term "Generic Identifier" which is the element name in XML. The role of this attribute is the same as the name of an XML - element.</p> <p><b>Tags:</b> xml.attribute=true</p>
value	VerbatimStringPlain	1	attr	<p>This is the value of the special data.</p> <p><b>Tags:</b>          xml.roleElement=false          xml.roleWrapperElement=false          xml.typeElement=false          xml.typeWrapperElement=false</p>
xmlSpace	XmlSpaceEnum	0..1	attr	<p>This attribute is used to signal an intention that in that element, white space should be preserved by applications. It is defined according to xml:space as declared by W3C.</p> <p><b>Tags:</b>          xml.attribute=true          xml.attributeRef=true          xml.enforceMinMultiplicity=true          xml.name=space          xml.nsPrefix=xml</p>

**Table A.30: Sd**

<b>Class</b>	<b>Sdg</b>			
<b>Package</b>	M2::MSR::AsamHdo::SpecialData			
<b>Note</b>	Sdg (SpecialDataGroup) is a generic model which can be used to keep arbitrary information which is not explicitly modeled in the meta-model.  Sdg can have various contents as defined by sdgContentsType. Special Data should only be used moderately since all elements should be defined in the meta-model.  Thereby SDG should be considered as a temporary solution when no explicit model is available. If an sdg Caption is available, it is possible to establish a reference to the sdg structure.			
<b>Base</b>	ARObject			
<b>Aggregated by</b>	AdminData.sdg, BuildActionEnvironment.sdg, BuildActionInvoker.sdg, BuildActionIoElement.sdg, FileInfoComment.sdg, RptHook.sdg, SdgContents.sdg, VariationPoint.sdg			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>





Class	Sdg	Mult.	Kind	
gid	NameToken	1	attr	This attributes specifies an identifier. Gid comes from the SGML/XML-Term "Generic Identifier" which is the element name in XML. The role of this attribute is the same as the name of an XML - element.  <b>Tags:</b> xml.attribute=true
sdgCaption	SdgCaption	0..1	aggr	This aggregation allows to assign the properties of Identifiable to the sdg. By this, a shortName etc. can be assigned to the Sdg.  <b>Stereotypes:</b> atpIdentityContributor <b>Tags:</b> xml.sequenceOffset=20
sdgContents Type	SdgContents	0..1	aggr	This is the content of the Sdg.  <b>Tags:</b> xml.roleElement=false xml.roleWrapperElement=false xml.sequenceOffset=30 xml.typeElement=false xml.typeWrapperElement=false

**Table A.31: Sdg**

Class	ServiceInstanceToPortPrototypeMapping			
Package	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInstanceMapping			
Note	This meta-class represents the ability to assign a transport layer dependent ServiceInstance to a Port Prototype.  With this mapping it is possible to define how specific PortPrototypes are represented in the middleware in terms of service configuration.  <b>Tags:</b> atp.recommendedPackage=ServiceInstanceToPortPrototypeMappings			
Base	<i>ARElement, ARObject, CollectableElement, Identifiable, MultilanguageReferrable, Packageable Element, Referrable, UploadableDesignElement, UploadablePackageElement</i>			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note
portPrototype	PortPrototype	0..1	iref	Reference to a specific PortPrototype that represents the ServiceInstance.  <b>Stereotypes:</b> atpUriDef <b>InstanceRef Implemented by:</b> PortPrototypeIn ExecutableInstanceRef
process	Process	0..1	ref	Reference to the Process in which the enclosing Service InstanceToPortPrototypeMapping is executed.  <b>Stereotypes:</b> atpSplittable <b>Tags:</b> atp.Splitkey=process
processDesign	ProcessDesign	0..1	ref	Reference to the ProcessDesign in which the Executable that contains the SoftwareComponent and the referenced PortPrototype is executed.  <b>Stereotypes:</b> atpUriDef
serviceInstance	AdaptivePlatform ServiceInstance	0..1	ref	Reference to a ServiceInstance that is represented in the Software Component by the mapped group of Port Prototypes.

**Table A.32: ServiceInstanceToPortPrototypeMapping**

<b>Class</b>	<b>ServiceInterface</b>			
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ApplicationDesign::PortInterface			
<b>Note</b>	This represents the ability to define a PortInterface that consists of a heterogeneous collection of methods, events and fields. <b>Tags:</b> atp.recommendedPackage=ServiceInterfaces			
<b>Base</b>	ARElement, ARObject, AtpBlueprint, AtpBlueprintable, AtpClassifier, AtpType, CollectableElement, Identifiable, MultilanguageReferrable, PackageableElement, PortInterface, Referrable			
<b>Aggregated by</b>	ARPackage.element			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
event	VariableDataPrototype	*	aggr	<p>This represents the collection of events defined in the context of a ServiceInterface.</p> <p><b>Stereotypes:</b> atpSplittable; atpVariation  <b>Tags:</b>  atp.Splitkey=event.shortName, event.variationPoint.shortLabel  vh.latestBindingTime=blueprintDerivationTime  xml.sequenceOffset=30</p>
field	Field	*	aggr	<p>This represents the collection of fields defined in the context of a ServiceInterface.</p> <p><b>Stereotypes:</b> atpSplittable; atpVariation  <b>Tags:</b>  atp.Splitkey=field.shortName, field.variationPoint.shortLabel  vh.latestBindingTime=blueprintDerivationTime  xml.sequenceOffset=40</p>
majorVersion	PositiveInteger	0..1	attr	<p>Major version of the service contract.</p> <p><b>Tags:</b> xml.sequenceOffset=10</p>
method	ClientServerOperation	*	aggr	<p>This represents the collection of methods defined in the context of a ServiceInterface.</p> <p><b>Stereotypes:</b> atpSplittable; atpVariation  <b>Tags:</b>  atp.Splitkey=method.shortName, method.variationPoint.shortLabel  vh.latestBindingTime=blueprintDerivationTime  xml.sequenceOffset=50</p>
minorVersion	PositiveInteger	0..1	attr	<p>Minor version of the service contract.</p> <p><b>Tags:</b> xml.sequenceOffset=20</p>
trigger	Trigger	*	aggr	<p>This represents the collection of triggers defined in the context of a ServiceInterface.</p> <p><b>Stereotypes:</b> atpSplittable; atpVariation  <b>Tags:</b>  atp.Splitkey=trigger.shortName, trigger.variationPoint.shortLabel  vh.latestBindingTime=blueprintDerivationTime  xml.sequenceOffset=60</p>

**Table A.33: ServiceInterface**

<b>Class</b>	<b>StdCppImplementationDataType</b>	
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ApplicationDesign::CppImplementationDataType	
<b>Note</b>	This meta-class represents the way to specify a data type definition that is taken as the basis for a C++ language binding to a C++ Standard Library feature. <b>Tags:</b> atp.recommendedPackage=CppImplementationDataTypes	





Class	StdCppImplementationDataType			
Base	ARElement, AROObject, AbstractImplementationDataType, AtpBlueprint, AtpBlueprintable, AtpClassifier, AtpType, AutosarDataType, CollectableElement, CppImplementationDataType, CppImplementationDataTypeContextTarget, Identifiable, MultilanguageReferrable, PackageableElement, Referrable			
Aggregated by	ARPackage.element			
Attribute	Type	Mult.	Kind	Note
-	-	-	-	-

**Table A.34: StdCppImplementationDataType**

Class	«atpVariation» SwDataDefProps			
Package	M2::MSR::DataDictionary::DataDefProperties			
Note	<p>This class is a collection of properties relevant for data objects under various aspects. One could consider this class as a "pattern of inheritance by aggregation". The properties can be applied to all objects of all classes in which SwDataDefProps is aggregated.</p> <p>Note that not all of the attributes or associated elements are useful all of the time. Hence, the process definition (e.g. expressed with an OCL or a Document Control Instance MSR-DCI) has the task of implementing limitations.</p> <p>SwDataDefProps covers various aspects:</p> <ul style="list-style-type: none"> <li>Structure of the data element for calibration use cases: is it a single value, a curve, or a map, but also the recordLayouts which specify how such elements are mapped/converted to the DataTypes in the programming language (or in AUTOSAR). This is mainly expressed by properties like swRecordLayout and swCalprmAxisSet</li> <li>Implementation aspects, mainly expressed by swImplPolicy, swVariableAccessImplPolicy, swAddr Method, swPointerTagetProps, baseType, implementationDataType and additionalNativeTypeQualifier</li> <li>Access policy for the MCD system, mainly expressed by swCalibrationAccess</li> <li>Semantics of the data element, mainly expressed by compuMethod and/or unit, dataConstr, invalid Value</li> <li>Code generation policy provided by swRecordLayout</li> </ul> <p><b>Tags:</b> vh.latestBindingTime=codeGenerationTime</p>			
Base	ARObject			
Aggregated by	AutosarDataType.swDataDefProps, CompositeNetworkRepresentation.networkRepresentation, Cpp ImplementationDataTypeElement.swDataDefProps, DataPrototype.swDataDefProps, DataPrototype TransformationProps.networkRepresentationProps, DiagnosticDataElement.swDataDefProps, Diagnostic EnvDataElementCondition.swDataDefProps, DltArgument.networkRepresentation, FlatInstance Descriptor.swDataDefProps, ImplementationDataTypeElement.swDataDefProps, InstantiationDataDef Props.swDataDefProps, ISignal.networkRepresentationProps, McDataInstance.resultingProperties, ParameterAccess.swDataDefProps, PerInstanceMemory.swDataDefProps, ReceiverComSpec.network Representation, SecurityEventContextDataElement.networkRepresentation, SenderComSpec.network Representation, SomeipDataPrototypeTransformationProps.networkRepresentation, SwPointerTarget Props.swDataDefProps, SwServiceArg.swDataDefProps, SwSystemconst.swDataDefProps, System Signal.physicalProps			
Attribute	Type	Mult.	Kind	Note
additionalNativeTypeQualifier	NativeDeclarationString	0..1	attr	<p>This attribute is used to declare native qualifiers of the programming language which can neither be deduced from the baseType (e.g. because the data object describes a pointer) nor from other more abstract attributes. Examples are qualifiers like "volatile", "strict" or "enum" of the C-language. All such declarations have to be put into one string.</p> <p><b>Tags:</b> xml.sequenceOffset=235</p>





<b>Class</b>	«atpVariation» <b>SwDataDefProps</b>			
annotation	Annotation	*	aggr	<p>This aggregation allows to add annotations (yellow pads ...) related to the current data object.</p> <p><b>Tags:</b></p> <ul style="list-style-type: none"> <li>xml.roleElement=true</li> <li>xml.roleWrapperElement=true</li> <li>xml.sequenceOffset=20</li> <li>xml.typeElement=false</li> <li>xml.typeWrapperElement=false</li> </ul>
baseType	SwBaseType	0..1	ref	<p>Base type associated with the containing data object.</p> <p><b>Tags:</b> xml.sequenceOffset=50</p>
compuMethod	CompuMethod	0..1	ref	<p>Computation method associated with the semantics of this data object.</p> <p><b>Tags:</b> xml.sequenceOffset=180</p>
dataConstr	DataConstr	0..1	ref	<p>Data constraint for this data object.</p> <p><b>Tags:</b> xml.sequenceOffset=190</p>
displayFormat	DisplayFormatString	0..1	attr	<p>This property describes how a number is to be rendered e.g. in documents or in a measurement and calibration system.</p> <p><b>Tags:</b> xml.sequenceOffset=210</p>
displayPresentation	DisplayPresentation Enum	0..1	attr	<p>This attribute controls the presentation of the related data for measurement and calibration tools.</p>
implementation DataType	AbstractImplementation DataType	0..1	ref	<p>This association denotes the ImplementationDataType of a data declaration via its aggregated SwDataDefProps. It is used whenever a data declaration is not directly referring to a base type. Especially</p> <ul style="list-style-type: none"> <li>• redefinition of an ImplementationDataType via a "typedef" to another ImplementationDatatype</li> <li>• the target type of a pointer (see SwPointerTarget Props), if it does not refer to a base type directly</li> <li>• the data type of an array or record element within an ImplementationDataType, if it does not refer to a base type directly</li> <li>• the data type of an SwServiceArg, if it does not refer to a base type directly</li> </ul> <p><b>Tags:</b> xml.sequenceOffset=215</p>
invalidValue	ValueSpecification	0..1	aggr	<p>Optional value to express invalidity of the actual data element.</p> <p><b>Tags:</b> xml.sequenceOffset=255</p>
stepSize	Float	0..1	attr	<p>This attribute can be used to define a value which is added to or subtracted from the value of a DataPrototype when using up/down keys while calibrating.</p>
swAddrMethod	SwAddrMethod	0..1	ref	<p>Addressing method related to this data object. Via an association to the same SwAddrMethod it can be specified that several DataPrototypes shall be located in the same memory without already specifying the memory section itself.</p> <p><b>Tags:</b> xml.sequenceOffset=30</p>





<b>Class</b>	«atpVariation» <b>SwDataDefProps</b>			
swAlignment	AlignmentType	0..1	attr	The attribute describes the intended typical alignment of the DataPrototype. If the attribute is not defined the alignment is determined by the swBaseType size and the memoryAllocationKeywordPolicy of the referenced SwAddrMethod.  <b>Tags:</b> xml.sequenceOffset=33
swBitRepresentation	SwBitRepresentation	0..1	aggr	Description of the binary representation in case of a bit variable.  <b>Tags:</b> xml.sequenceOffset=60
swCalibrationAccess	SwCalibrationAccessEnum	0..1	attr	Specifies the read or write access by MCD tools for this data object.  <b>Tags:</b> xml.sequenceOffset=70
swCalprmAxisSet	SwCalprmAxisSet	0..1	aggr	This specifies the properties of the axes in case of a curve or map etc. This is mainly applicable to calibration parameters.  <b>Tags:</b> xml.sequenceOffset=90
swComparisonVariable	SwVariableRefProxy	*	aggr	Variables used for comparison in an MCD process.  <b>Tags:</b> xml.sequenceOffset=170 xml.typeElement=false
swDataDependency	SwDataDependency	0..1	aggr	Describes how the value of the data object has to be calculated from the value of another data object (by the MCD system).  <b>Tags:</b> xml.sequenceOffset=200
swHostVariable	SwVariableRefProxy	0..1	aggr	Contains a reference to a variable which serves as a host-variable for a bit variable. Only applicable to bit objects.  <b>Tags:</b> xml.sequenceOffset=220 xml.typeElement=false
swImplPolicy	SwImplPolicyEnum	0..1	attr	Implementation policy for this data object.  <b>Tags:</b> xml.sequenceOffset=230
swIntendedResolution	Numerical	0..1	attr	The purpose of this element is to describe the requested quantization of data objects early on in the design process.  The resolution ultimately occurs via the conversion formula present (compuMethod), which specifies the transition from the physical world to the standardized world (and vice-versa) (here, "the slope per bit" is present implicitly in the conversion formula).  In the case of a development phase without a fixed conversion formula, a pre-specification can occur through swIntendedResolution.  The resolution is specified in the physical domain according to the property "unit".  <b>Tags:</b> xml.sequenceOffset=240
swInterpolationMethod	Identifier	0..1	attr	This is a keyword identifying the mathematical method to be applied for interpolation. The keyword needs to be related to the interpolation routine which needs to be invoked.  <b>Tags:</b> xml.sequenceOffset=250





<b>Class</b>	<b>«atpVariation» SwDataDefProps</b>			
swIsVirtual	Boolean	0..1	attr	<p>This element distinguishes virtual objects. Virtual objects do not appear in the memory, their derivation is much more dependent on other objects and hence they shall have a swDataDependency .</p> <p><b>Tags:</b> xml.sequenceOffset=260</p>
swPointerTarget Props	SwPointerTargetProps	0..1	aggr	<p>Specifies that the containing data object is a pointer to another data object.</p> <p><b>Tags:</b> xml.sequenceOffset=280</p>
swRecord Layout	SwRecordLayout	0..1	ref	<p>Record layout for this data object.</p> <p><b>Tags:</b> xml.sequenceOffset=290</p>
swRefresh Timing	MultidimensionalTime	0..1	aggr	<p>This element specifies the frequency in which the object involved shall be or is called or calculated. This timing can be collected from the task in which write access processes to the variable run. But this cannot be done by the MCD system.</p> <p>So this attribute can be used in an early phase to express the desired refresh timing and later on to specify the real refresh timing.</p> <p><b>Tags:</b> xml.sequenceOffset=300</p>
swTextProps	SwTextProps	0..1	aggr	<p>the specific properties if the data object is a text object.</p> <p><b>Tags:</b> xml.sequenceOffset=120</p>
swValueBlock Size	Numerical	0..1	attr	<p>This represents the size of a Value Block</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b></p> <p>vh.latestBindingTime=preCompileTime xml.sequenceOffset=80</p>
swValueBlock SizeMult (ordered)	Numerical	*	attr	<p>This attribute is used to specify the dimensions of a value block (VAL_BLK) for the case that that value block has more than one dimension.</p> <p>The dimensions given in this attribute are ordered such that the first entry represents the first dimension, the second entry represents the second dimension, and so on.</p> <p>For one-dimensional value blocks the attribute swValue BlockSize shall be used and this attribute shall not exist.</p> <p><b>Stereotypes:</b> atpVariation</p> <p><b>Tags:</b> vh.latestBindingTime=preCompileTime</p>
unit	Unit	0..1	ref	<p>Physical unit associated with the semantics of this data object. This attribute applies if no compuMethod is specified. If both units (this as well as via compuMethod) are specified the units shall be compatible.</p> <p><b>Tags:</b> xml.sequenceOffset=350</p>
valueAxisData Type	ApplicationPrimitive DataType	0..1	ref	<p>The referenced ApplicationPrimitiveDataType represents the primitive data type of the value axis within a compound primitive (e.g. curve, map). It supersedes CompuMethod, Unit, and BaseType.</p> <p><b>Tags:</b> xml.sequenceOffset=355</p>

**Table A.35: SwDataDefProps**

<b>Class</b>	<b>SymbolProps</b>			
<b>Package</b>	M2::AUTOSARTemplates::SWComponentTemplate::Components			
<b>Note</b>	This meta-class represents the ability to contribute a part of a namespace.			
<b>Base</b>	<i>ARObject, ImplementationProps, Referrable</i>			
<b>Aggregated by</b>	Allocator.namespace, ApApplicationErrorDomain.namespace, <i>AtomicSwComponentType.symbolProps, CppImplementationDataType.namespace, ImplementationDataType.symbolProps, PortInterface.namespace, SecurityEventDefinition.eventSymbolName</i>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
-	-	-	-	-

**Table A.36: SymbolProps**

<b>Class</b>	<b>UserDefinedEventDeployment</b>			
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInterfaceDeployment			
<b>Note</b>	UserDefined configuration settings for an Event.			
<b>Base</b>	<i>ARObject, Identifiable, MultilanguageReferrable, Referrable, ServiceEventDeployment</i>			
<b>Aggregated by</b>	<i>ServiceInterfaceDeployment.eventDeployment, UserDefinedFieldDeployment.notifier</i>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
eventReceptionDefaultValue	ValueSpecification	0..1	aggr	<p>Value used to fill the Event data on the receiver side, if less data than expected is received. The value is expected to cover the entire expected event network payload.</p> <p>The value specification is supposed to take the order of serialized representation of the data on the network, as opposed to the order of elements in a data type description.</p>

**Table A.37: UserDefinedEventDeployment**

<b>Class</b>	<b>UserDefinedFieldDeployment</b>			
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInterfaceDeployment			
<b>Note</b>	UserDefined configuration settings for a Field.			
<b>Base</b>	<i>ARObject, Identifiable, MultilanguageReferrable, Referrable, ServiceFieldDeployment</i>			
<b>Aggregated by</b>	<i>ServiceInterfaceDeployment.fieldDeployment</i>			
<b>Attribute</b>	<b>Type</b>	<b>Mult.</b>	<b>Kind</b>	<b>Note</b>
get	<i>UserDefinedMethodDeployment</i>	0..1	aggr	This aggregation represents the settings of the get method
notifier	<i>UserDefinedEventDeployment</i>	0..1	aggr	This aggregation represents the settings of the notifier.
set	<i>UserDefinedMethodDeployment</i>	0..1	aggr	This aggregation represents the settings of the set method

**Table A.38: UserDefinedFieldDeployment**

<b>Class</b>	<b>UserDefinedMethodDeployment</b>			
<b>Package</b>	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInterfaceDeployment			
<b>Note</b>	UserDefined configuration settings for a Method.			
<b>Base</b>	<i>ARObject, Identifiable, MultilanguageReferrable, Referrable, ServiceMethodDeployment</i>			





Class	UserDefinedMethodDeployment			
Aggregated by	ServiceInterfaceDeployment.methodDeployment, <a href="#">UserDefinedFieldDeployment.get</a> , <a href="#">UserDefinedFieldDeployment.set</a>			
Attribute	Type	Mult.	Kind	Note
-	-	-	-	-

**Table A.39: UserDefinedMethodDeployment**

Class	UserDefinedServiceInterfaceDeployment			
Package	M2::AUTOSARTemplates::AdaptivePlatform::ServiceInstanceManifest::ServiceInterfaceDeployment			
Note	UserDefined configuration settings for a ServiceInterface. Tags: atp.recommendedPackage=ServiceInterfaceDeployments			
Base	<i>ARElement, ARObject, CollectableElement, Identifiable, MultilanguageReferrable, PackageableElement, Referrable, ServiceInterfaceDeployment, UploadableDesignElement, UploadablePackageElement</i>			
Aggregated by	<a href="#">ARPackage.element</a>			
Attribute	Type	Mult.	Kind	Note
-	-	-	-	-

**Table A.40: UserDefinedServiceInterfaceDeployment**

## A.2 Examples (informative)

### A.2.1 Root Package Structure

This example outlines the recommended root package structure

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation=
  "http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
  <AR-PACKAGES>
    <AR-PACKAGE>
      <SHORT-NAME>Catalogs</SHORT-NAME>
      <ELEMENTS/>
    <AR-PACKAGES>
      <AR-PACKAGE>
        <AR-PACKAGE>
          <SHORT-NAME>VSS</SHORT-NAME>
          <ELEMENTS/>
        <AR-PACKAGES>
          <AR-PACKAGE>
            <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
          </AR-PACKAGE>
          <AR-PACKAGE>
            <SHORT-NAME>CppImplementationDataTypes</SHORT-NAME>
          </AR-PACKAGE>
          <AR-PACKAGE>
            <SHORT-NAME>CompuMethods</SHORT-NAME>
          </AR-PACKAGE>
          <AR-PACKAGE>
            <SHORT-NAME>DataTypeMappings</SHORT-NAME>
          </AR-PACKAGE>
        <AR-PACKAGES>
      </AR-PACKAGES>
    </AR-PACKAGE>
  </AR-PACKAGES>
</AUTOSAR>
```

```

        </AR-PACKAGE>
        <AR-PACKAGE>
            <SHORT-NAME>Units</SHORT-NAME>
        </AR-PACKAGE>
    </AR-PACKAGES>
    </AR-PACKAGE>
    </AR-PACKAGES>
    </AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.1: AUTOSAR ARXML representation of the root package structure**

```

Vehicle:
  type: branch
  description: High-level vehicle data.

Vehicle.Cabin:
  type: branch
  description: Cabin data.

Vehicle.Cabin.Door:
  type: branch
  description: Door data.

```

This example shows the use of multiple catalog versions.

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation=
    "http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS/>
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>VSS</SHORT-NAME>
            <ELEMENTS/>
        </AR-PACKAGE>
        <AR-PACKAGE>
            <SHORT-NAME>VSS_4_1</SHORT-NAME>
            <ELEMENTS/>
        </AR-PACKAGE>
    </AR-PACKAGES>
    </AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.2: AUTOSAR ARXML Versioned Catalogs**

This example outlines the resulting ARXML Package Structure

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
  org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
  schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>VSS</SHORT-NAME>
        <ELEMENTS>

```

```

</ELEMENTS>
<AR-PACKAGES>
<AR-PACKAGE>
    <SHORT-NAME>Vehicle</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>Cabin</SHORT-NAME>
            <ELEMENTS />
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>Door</SHORT-NAME>
                    <ELEMENTS />
                    <AR-PACKAGES />
                </AR-PACKAGE>
                </AR-PACKAGES>
            </AR-PACKAGE>
            </AR-PACKAGES>
        </AR-PACKAGE>
        </AR-PACKAGES>
    </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.3: AUTOSAR ARXML Branch Package Structure**

## A.2.2 Primitive Type Modelling (informative)

This example outlines the modelling for DataTypeMapping.

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS />
                <AR-PACKAGES>
                    <AR-PACKAGE>
                        <SHORT-NAME>DataTypeMappings</SHORT-NAME>
                        <ELEMENTS>
                            <DATA-TYPE-MAPPING-SET>
                                <SHORT-NAME>DataTypeMappingSet</SHORT-NAME>
                                <DATA-TYPE-MAPS>
                                    <DATA-TYPE-MAP>
                                        <APPLICATION-DATA-TYPE-REF DEST="
APPLICATION-PRIMITIVE-DATA-TYPE">/
                                    Catalogs/VSS/ApplicationDataTypes/

```

```

        Vehicle/NominalVoltage</APPLICATION-DATA
        -TYPE-REF>
        <IMPLEMENTATION-DATA-TYPE-REF DEST="STD-CPP
        -IMPLEMENTATION-DATA-TYPE">/Catalogs/VSS
        /ImplementationDataTypes/Vehicle/
        NominalVoltage</IMPLEMENTATION-DATA-TYPE
        -REF>
        </DATA-TYPE-MAP>
        </DATA-TYPE-MAPS>
        </DATA-TYPE-MAPPING-SET>
        </ELEMENTS>
        </AR-PACKAGE>
        <AR-PACKAGE>
            <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
            <ELEMENTS>
            </ELEMENTS>
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>Vehicle</SHORT-NAME>
                    <ELEMENTS>
                        <APPLICATION-PRIMITIVE-DATA-TYPE>
                            <SHORT-NAME>NominalVoltage</SHORT-
                            NAME>
                            <DESC>
                                <L-2 L="EN">Nominal Voltage of
                                the battery.</L-2>
                            </DESC>
                            <CATEGORY>VALUE</CATEGORY>
                            <SW-DATA-DEF-PROPS>
                                <SW-DATA-DEF-PROPS-VARIANTS/>
                            </SW-DATA-DEF-PROPS>
                        </APPLICATION-PRIMITIVE-DATA-TYPE>
                    </ELEMENTS>
                </AR-PACKAGE>
            </AR-PACKAGES>
        </AR-PACKAGE>
        <AR-PACKAGE>
            <SHORT-NAME>ImplementationDataTypes</SHORT-NAME>
            <ELEMENTS>
            </ELEMENTS>
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>Vehicle</SHORT-NAME>
                    <ELEMENTS>
                        <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                            <SHORT-NAME>NominalVoltage</SHORT-NAME>
                            <CATEGORY>TYPE_REFERENCE</CATEGORY>
                            <NAMESPACES>
                                <SYMBOL-PROPS>
                                    <SHORT-NAME>ns0</SHORT-NAME>
                                    <SYMBOL>covesa</SYMBOL>
                                </SYMBOL-PROPS>
                                <SYMBOL-PROPS>
                                    <SHORT-NAME>ns1</SHORT-NAME>
                                    <SYMBOL>vss</SYMBOL>
                                </SYMBOL-PROPS>
                            </NAMESPACES>
                        </STD-CPP-IMPLEMENTATION-DATA-TYPE>
                    </ELEMENTS>
                </AR-PACKAGE>
            </AR-PACKAGES>
        </AR-PACKAGE>
    
```

```

<SYMBOL-PROPS>
<SHORT-NAME>ns2</SHORT-NAME>
<SYMBOL>vehicle</SYMBOL>
</SYMBOL-PROPS>
<SYMBOL-PROPS>
<SHORT-NAME>ns3</SHORT-NAME>
<SYMBOL>powertrain</SYMBOL>
</SYMBOL-PROPS>
<SYMBOL-PROPS>
<SHORT-NAME>ns4</SHORT-NAME>
<SYMBOL>tractionbattery</SYMBOL>
</SYMBOL-PROPS>
</NAMESPACES>
<TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-
EMITTER>
<TYPE-REFERENCE-REF DEST="STD-CPP-
IMPLEMENTATION-DATA-TYPE">/AUTOSAR/
StdTypes/uint16_t</TYPE-REFERENCE-
REF>
</STD-CPP-IMPLEMENTATION-DATA-TYPE>
</ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
<AR-PACKAGE>
<SHORT-NAME>AUTOSAR</SHORT-NAME>
<ELEMENTS/>
<AR-PACKAGES>
<AR-PACKAGE UUID="68d89532-bd07-4f66-907b-3b7e50daa1f8">
<SHORT-NAME>StdTypes</SHORT-NAME>
<ELEMENTS>
<STD-CPP-IMPLEMENTATION-DATA-TYPE>
<SHORT-NAME>uint16_t</SHORT-NAME>
<CATEGORY>VALUE</CATEGORY>
</STD-CPP-IMPLEMENTATION-DATA-TYPE>
</ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>
    
```

#### **Listing A.4: AUTOSAR ARXML Data Type Mapping**

This example outlines the namespace modelling for StdCppImplementationDataType.

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd
  ">
<AR-PACKAGES>
  <AR-PACKAGE>
    
```

```

<SHORT-NAME>Door</SHORT-NAME>
<ELEMENTS>
    <STD-CPP-IMPLEMENTATION-DATA-TYPE>
        <SHORT-NAME>isLocked</SHORT-NAME>
        <CATEGORY>TYPE_REFERENCE</CATEGORY>
        <NAMESPACES>
            <SYMBOL-PROPS>
                <SHORT-NAME>ns0</SHORT-NAME>
                <SYMBOL>covesa</SYMBOL>
            </SYMBOL-PROPS>
            <SYMBOL-PROPS>
                <SHORT-NAME>ns1</SHORT-NAME>
                <SYMBOL>vss</SYMBOL>
            </SYMBOL-PROPS>
            <SYMBOL-PROPS>
                <SHORT-NAME>ns2</SHORT-NAME>
                <SYMBOL>vehicle</SYMBOL>
            </SYMBOL-PROPS>
            <SYMBOL-PROPS>
                <SHORT-NAME>ns3</SHORT-NAME>
                <SYMBOL>cabin</SYMBOL>
            </SYMBOL-PROPS>
            <SYMBOL-PROPS>
                <SHORT-NAME>ns4</SHORT-NAME>
                <SYMBOL>door</SYMBOL>
            </SYMBOL-PROPS>
        </NAMESPACES>
        <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
        <TYPE-REFERENCE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
            TYPE">/AUTOSAR/StdTypes/bool</TYPE-REFERENCE-REF>
    </STD-CPP-IMPLEMENTATION-DATA-TYPE>
</ELEMENTS>
<AR-PACKAGES/>
</AR-PACKAGE>
<AR-PACKAGE>
    <SHORT-NAME>AUTOSAR</SHORT-NAME>
    <ELEMENTS/>
    <AR-PACKAGES>
        <AR-PACKAGE UUID="68d89532-bd07-4f66-907b-3b7e50da1f8">
            <SHORT-NAME>StdTypes</SHORT-NAME>
            <ELEMENTS>
                <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                    <SHORT-NAME>bool</SHORT-NAME>
                    <CATEGORY>VALUE</CATEGORY>
                </STD-CPP-IMPLEMENTATION-DATA-TYPE>
            </ELEMENTS>
        </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>
    
```

**Listing A.5: AUTOSAR ARXML Namespaces**

### A.2.3 C++ Keywords

The following items are currently C++ keywords:

- alignas (C++11)
- alignof (C++11)
- and
- and\_eq
- asm
- atomic\_cancel (TM TS)
- atomic\_commit (TM TS)
- atomic\_noexcept (TM TS)
- "auto"
- "bitand"
- bitor
- bool
- break
- case
- catch
- char
- char8\_t (C++20)
- char16\_t (C++11)
- char32\_t (C++11)
- class
- compl
- concept (C++20)
- const
- consteval (C++20)
- constexpr (C++11)
- constinit (C++20)
- const\_cast
- continue

- `co_await` (C++20)
- `co_return` (C++20)
- `co_yield` (C++20)
- `decltype` (C++11)
- `default`
- `delete`
- `do`
- `double`
- `dynamic_cast`
- `else`
- `enum`
- `explicit`
- `export`
- `extern`
- `false`
- `float`
- `for`
- `friend`
- `goto`
- `if`
- `inline`
- `int`
- `long`
- `mutable`
- `namespace`
- `new`
- `noexcept` (C++11)
- `not`
- `not_eq`
- `nullptr` (C++11)

- operator
- or
- or\_eq
- private
- protected
- public
- reflexpr
- register
- reinterpret\_cast
- requires (C++20)
- return
- short
- signed
- sizeof
- static
- static\_assert (C++11)
- static\_cast
- struct
- switch
- synchronized
- template
- this
- thread\_local (C++11)
- throw
- true
- try
- typedef
- typeid
- typename
- union

- unsigned
- using
- virtual
- void
- volatile
- wchar\_t
- while
- xor
- xor\_eq

This example outlines the data constraint modelling

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS/>
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS/>
                <AR-PACKAGES>
                    <AR-PACKAGE>
                        <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
                        <ELEMENTS>
                            <APPLICATION-PRIMITIVE-DATA-TYPE>
                                <SHORT-NAME>NominalVoltage</SHORT-NAME>
                                <DESC>
                                    <L-2 L="EN">Nominal Voltage of the battery.</L-2>
                                </DESC>
                                <CATEGORY>VALUE</CATEGORY>
                                <SW-DATA-DEF-PROPS>
                                    <SW-DATA-DEF-PROPS-VARIANTS>
                                        <SW-DATA-DEF-PROPS-CONDITIONAL>
                                            <DATA-CONSTR-REF DEST="DATA-CONSTR">/Catalogs/VSS/ApplicationDataTypes/NominalVoltageDC</DATA-CONSTR-REF>
                                        </SW-DATA-DEF-PROPS-CONDITIONAL>
                                    </SW-DATA-DEF-PROPS-VARIANTS>
                                </SW-DATA-DEF-PROPS>
                            </APPLICATION-PRIMITIVE-DATA-TYPE>
                            <DATA-CONSTR>
                                <SHORT-NAME>NominalVoltageDC</SHORT-NAME>
                                <DATA-CONSTR-RULES>
                                    <DATA-CONSTR-RULE>

```

```

<PHYS-CONSTRS>
<LOWER-LIMIT INTERVAL-TYPE="CLOSED">0</
    LOWER-LIMIT>
<UPPER-LIMIT INTERVAL-TYPE="CLOSED">65535</
    UPPER-LIMIT>
</PHYS-CONSTRS>
</DATA-CONSTR-RULE>
</DATA-CONSTR-RULES>
</DATA-CONSTR>
</ELEMENTS>
<AR-PACKAGES>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

#### Listing A.6: AUTOSAR ARXML data constraint

```

Vehicle:
type: branch
description: High-level vehicle data.

Vehicle.NominalVoltage:
datatype: uint16[]
type: attribute
unit: V
description: Nominal Voltage of the battery.
comment: Nominal voltage typically refers to voltage of fully
charged battery when delivering rated capacity.

Vehicle.NominalVoltage:
datatype: uint16
type: attribute
unit: V
description: Nominal Voltage of the battery.
comment: Nominal voltage typically refers to voltage of fully
charged battery when delivering rated capacity.

SupportedAutonomyLevel:
datatype: string
type: attribute
allowed: [
    'SAE_0', # No Driving Automation
    'SAE_1', # Driver Assistance
    'SAE_2', # Partial Driving Automation
    'SAE_3', # Conditional Driving Automation
    'SAE_4', # High Driving Automation
    'SAE_5' # Full Driving Automation
]
description: Indicates the highest level of driving automation
according to the SAE J3016 taxonomy the vehicle is capable of.

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS />
            <AR-PACKAGES>

```

```

<AR-PACKAGE>
    <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
    <ELEMENTS>
        <APPLICATION-PRIMITIVE-DATA-TYPE>
            <SHORT-NAME>SupportedAutonomyLevel</SHORT-NAME>
            <DESC>
                <L-2 L="EN">Indicates the highest level of autonomy
                    according to SAE J3016 taxonomy the vehicle is
                    capable of.</L-2>
            </DESC>
            <CATEGORY>VALUE</CATEGORY>
            <SW-DATA-DEF-PROPS>
                <SW-DATA-DEF-PROPS-VARIANTS>
                    <SW-DATA-DEF-PROPS-CONDITIONAL>
                        <COMPU-METHOD-REF DEST="COMPU-METHOD">/Catalogs/VSS
                            /ApplicationDataTypes/SupportedAutonomyLevelCM</
                            COMPU-METHOD-REF>
                    </SW-DATA-DEF-PROPS-CONDITIONAL>
                </SW-DATA-DEF-PROPS-VARIANTS>
            </SW-DATA-DEF-PROPS>
        </APPLICATION-PRIMITIVE-DATA-TYPE>
        <COMPU-METHOD>
            <SHORT-NAME>SupportedAutonomyLevelCM</SHORT-NAME>
            <CATEGORY>TEXTTABLE</CATEGORY>
            <COMPU-INTERNAL-TO-PHYS>
                <COMPU-SCALES>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_0</SYMBOL>
                        <LOWER-LIMIT>0</LOWER-LIMIT>
                        <UPPER-LIMIT>0</UPPER-LIMIT>
                    </COMPU-SCALE>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_1</SYMBOL>
                        <LOWER-LIMIT>1</LOWER-LIMIT>
                        <UPPER-LIMIT>1</UPPER-LIMIT>
                    </COMPU-SCALE>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_2</SYMBOL>
                        <LOWER-LIMIT>2</LOWER-LIMIT>
                        <UPPER-LIMIT>2</UPPER-LIMIT>
                    </COMPU-SCALE>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_3</SYMBOL>
                        <LOWER-LIMIT>3</LOWER-LIMIT>
                        <UPPER-LIMIT>3</UPPER-LIMIT>
                    </COMPU-SCALE>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_4</SYMBOL>
                        <LOWER-LIMIT>4</LOWER-LIMIT>
                        <UPPER-LIMIT>4</UPPER-LIMIT>
                    </COMPU-SCALE>
                    <COMPU-SCALE>
                        <SYMBOL>SAE_5</SYMBOL>
                        <LOWER-LIMIT>5</LOWER-LIMIT>
                        <UPPER-LIMIT>5</UPPER-LIMIT>
                    </COMPU-SCALE>
                </COMPU-SCALES>
            </COMPU-INTERNAL-TO-PHYS>
        </COMPU-METHOD>
    </ELEMENTS>

```

```

        </COMPU-SCALES>
        </COMPU-INTERNAL-TO-PHYS>
        </COMPU-METHOD>
    </ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.7: AUTOSAR ARXML representation of Enumeration**

## A.2.4 Complex Type Modelling

### A.2.4.1 Variable Size Arrays

The following sections outlines a variable size array in VSS.

```

#
# The vehicle branch for highlevel vehicle signals
# and attributes.
#
Vehicle:
  type: branch
  description: High-level vehicle data.

# Include the Vehicle/Vehicle.vspec file and attach
# all its signals under the
# Vehicle branch created above.

Vehicle.NominalVoltage:
  datatype: uint16[]
  type: attribute
  unit: V
  description: Nominal Voltage of the battery.
  comment: Nominal voltage typically refers to voltage
  of fully charged
  battery when delivering rated capacity.

```

The resulting ARXML representations from that VSS array.

```

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>VSS</SHORT-NAME>
            <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
                <ELEMENTS />
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>Vehicle</SHORT-NAME>

```

```

<ELEMENTS>
    <APPLICATION-PRIMITIVE-DATA-TYPE>
        <SHORT-NAME>NominalVoltage</SHORT-NAME>
        <DESC>
            <L-2 L="EN">Nominal Voltage of the battery.</L-2>
        </DESC>
        <CATEGORY>VALUE</CATEGORY>
    </APPLICATION-PRIMITIVE-DATA-TYPE>
    <APPLICATION-ARRAY-DATA-TYPE>
        <SHORT-NAME>NominalVoltage_ARRAY</SHORT-NAME>
        <CATEGORY>ARRAY</CATEGORY>
        <ELEMENT>
            <SHORT-NAME>ARRAY_ELEMENT</SHORT-NAME>
            <CATEGORY>VALUE</CATEGORY>
            <TYPE-TREF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/
                Catalogs/VSS/ApplicationDataTypes/Vehicle/
                NominalVoltage</TYPE-TREF>
            <ARRAY-SIZE-SEMANTICS>VARIABLE-SIZE</ARRAY-SIZE-
                SEMANTICS>
        </ELEMENT>
    </APPLICATION-ARRAY-DATA-TYPE>
</ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.8: AUTOSAR ARXML representation of the Variable Size Application Array Data Type**

```

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
schema/r4.0/AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS />
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>ImplementationDataTypes</SHORT-NAME>
                    <ELEMENTS>
                        <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                            <SHORT-NAME>NominalVoltage</SHORT-NAME>
                            <CATEGORY>TYPE_REFERENCE</CATEGORY>
                            <NAME-SPACES>
                                <SYMBOL-PROPS>

```

```

        <SHORT-NAME>ns0</SHORT-NAME>
        <SYMBOL>covesa</SYMBOL>
        </SYMBOL-PROPS>
        <SYMBOL-PROPS>
        <SHORT-NAME>ns1</SHORT-NAME>
        <SYMBOL>vss</SYMBOL>
        </SYMBOL-PROPS>
        </NAMESPACES>
        <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
        <TYPE-REFERENCE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
            TYPE">/AUTOSAR/StdTypes/uint16_t</TYPE-REFERENCE-REF>
        </STD-CPP-IMPLEMENTATION-DATA-TYPE>
        <STD-CPP-IMPLEMENTATION-DATA-TYPE>
            <SHORT-NAME>NominalVoltage_ARRAY</SHORT-NAME>
            <CATEGORY>ARRAY</CATEGORY>
            <TEMPLATE-ARGUMENTS>
                <CPP-TEMPLATE-ARGUMENT>
                    <TEMPLATE-TYPE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
                        TYPE">/Catalogs/VSS/ImplementationDataTypes/
                        NominalVoltage</TEMPLATE-TYPE-REF>
                </CPP-TEMPLATE-ARGUMENT>
            </TEMPLATE-ARGUMENTS>
            <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
        </STD-CPP-IMPLEMENTATION-DATA-TYPE>
        </ELEMENTS>
    </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
<AR-PACKAGE>
    <SHORT-NAME>AUTOSAR</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
        <AR-PACKAGE UUID="68d89532-bd07-4f66-907b-3b7e50daa1f8">
            <SHORT-NAME>StdTypes</SHORT-NAME>
            <ELEMENTS>
                <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                    <SHORT-NAME>uint16_t</SHORT-NAME>
                    <CATEGORY>VALUE</CATEGORY>
                </STD-CPP-IMPLEMENTATION-DATA-TYPE>
            </ELEMENTS>
        </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.9: AUTOSAR ARXML representation of the Variable Size Implementation Array Data Type**

#### A.2.4.2 Fixed Size Arrays

Vehicle:

```

type: branch
description: High-level vehicle data.

Vehicle.NominalVoltage:
  datatype: uint16[]
  type: attribute
  unit: V
  description: Nominal Voltage of the battery.
  comment: Nominal voltage typically refers
           to voltage of fully charged
           battery when delivering rated capacity.

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
  <AR-PACKAGE>
    <SHORT-NAME>Catalogs</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
      <AR-PACKAGE>
        <SHORT-NAME>VSS</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
          <AR-PACKAGE>
            <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
            <ELEMENTS />
            <AR-PACKAGES>
              <AR-PACKAGE>
                <SHORT-NAME>Vehicle</SHORT-NAME>
                <ELEMENTS>
                  <APPLICATION-PRIMITIVE-DATA-TYPE>
                    <SHORT-NAME>NominalVoltage</SHORT-NAME>
                    <DESC>
                      <L-2 L="EN">Nominal Voltage of the battery.</L-2>
                    </DESC>
                    <CATEGORY>VALUE</CATEGORY>
                  </APPLICATION-PRIMITIVE-DATA-TYPE>
                  <APPLICATION-ARRAY-DATA-TYPE>
                    <SHORT-NAME>NominalVoltage_ARRAY</SHORT-NAME>
                    <CATEGORY>ARRAY</CATEGORY>
                    <ELEMENT>
                      <SHORT-NAME>ARRAY_ELEMENT</SHORT-NAME>
                      <CATEGORY>VALUE</CATEGORY>
                      <TYPE-TREF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">/
                        Catalogs/VSS/ApplicationDataTypes/Vehicle/
                        NominalVoltage</TYPE-TREF>
                    <ARRAY-SIZE-SEMANTICS>FIXED-SIZE</ARRAY-SIZE-
                      SEMANTICS>
                    <MAX-NUMBER-OF-ELEMENTS>10</MAX-NUMBER-OF-ELEMENTS>
                  </ELEMENT>
                </APPLICATION-ARRAY-DATA-TYPE>
              </ELEMENTS>
            </AR-PACKAGE>
          </AR-PACKAGES>
        </AR-PACKAGE>
      </AR-PACKAGES>
    </AR-PACKAGE>
  </AR-PACKAGES>
</AR-PACKAGES>

```

```

    </AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.10: AUTOSAR ARXML representation of the Fixed Size Application Array Data Type**

```

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
<AR-PACKAGE>
    <SHORT-NAME>Catalogs</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>VSS</SHORT-NAME>
            <ELEMENTS />
            <AR-PACKAGES>
                <AR-PACKAGE>
                    <SHORT-NAME>ImplementationDataTypes</SHORT-NAME>
                    <ELEMENTS>
                        <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                            <SHORT-NAME>NominalVoltage</SHORT-NAME>
                            <CATEGORY>TYPE_REFERENCE</CATEGORY>
                            <NAMESPACES>
                                <SYMBOL-PROPS>
                                    <SHORT-NAME>ns0</SHORT-NAME>
                                    <SYMBOL>covesa</SYMBOL>
                                </SYMBOL-PROPS>
                                <SYMBOL-PROPS>
                                    <SHORT-NAME>ns1</SHORT-NAME>
                                    <SYMBOL>vss</SYMBOL>
                                </SYMBOL-PROPS>
                            </NAMESPACES>
                            <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
                            <TYPE-REFERENCE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
TYPE">/AUTOSAR/StdTypes/uint16_t</TYPE-REFERENCE-REF>
                        </STD-CPP-IMPLEMENTATION-DATA-TYPE>
                        <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                            <SHORT-NAME>NominalVoltage_ARRAY</SHORT-NAME>
                            <CATEGORY>ARRAY</CATEGORY>
                            <ARRAY-SIZE>10</ARRAY-SIZE>
                            <TEMPLATE-ARGUMENTS>
                                <CPP-TEMPLATE-ARGUMENT>
                                    <TEMPLATE-TYPE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
TYPE">/Catalogs/VSS/ImplementationDataTypes/
NominalVoltage</TEMPLATE-TYPE-REF>
                                </CPP-TEMPLATE-ARGUMENT>
                            </TEMPLATE-ARGUMENTS>
                            <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
                        </STD-CPP-IMPLEMENTATION-DATA-TYPE>
                    </ELEMENTS>
                </AR-PACKAGE>
            </AR-PACKAGES>
        </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
</AUTOSAR>

```

```

        </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
<AR-PACKAGE>
    <SHORT-NAME>AUTOSAR</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>StdTypes</SHORT-NAME>
            <ELEMENTS>
                <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                    <SHORT-NAME>uint16_t</SHORT-NAME>
                    <CATEGORY>VALUE</CATEGORY>
                </STD-CPP-IMPLEMENTATION-DATA-TYPE>
            </ELEMENTS>
        </AR-PACKAGE>
    </AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.11: AUTOSAR ARXML representation of the Fixed Size Implementation Array Data Type**

#### A.2.4.3 Struct Types

```

Types:
    type: branch

Types.DeliveryInfo:
    type: struct
    description: A struct datatype containing info for each delivery

Types.DeliveryInfo.Address:
    datatype: string
    type: property
    description: Destination address

Types.DeliveryInfo.Receiver:
    datatype: string
    type: property
    description: Name of receiver

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS />
                <AR-PACKAGES>
                    <AR-PACKAGE>
                        <SHORT-NAME>ApplicationDataTypes</SHORT-NAME>
                        <ELEMENTS />
                    <AR-PACKAGES>
                        <AR-PACKAGE>
                            <SHORT-NAME>Types</SHORT-NAME>

```

```

<ELEMENTS>
  <APPLICATION-PRIMITIVE-DATA-TYPE>
    <SHORT-NAME>Address</SHORT-NAME>
    <DESC>
      <L-2 L="EN">Destination address</L-2>
    </DESC>
    <CATEGORY>VALUE</CATEGORY>
  </APPLICATION-PRIMITIVE-DATA-TYPE>
  <APPLICATION-PRIMITIVE-DATA-TYPE>
    <SHORT-NAME>Receiver</SHORT-NAME>
    <DESC>
      <L-2 L="EN">Name of receiver</L-2>
    </DESC>
    <CATEGORY>VALUE</CATEGORY>
  </APPLICATION-PRIMITIVE-DATA-TYPE>
  <APPLICATION-RECORD-DATA-TYPE>
    <SHORT-NAME>DeliveryInfo</SHORT-NAME>
    <DESC>
      <L-2 L="EN">A struct datatype containing info for
      each delivery</L-2>
    </DESC>
    <CATEGORY>STRUCTURE</CATEGORY>
    <ELEMENTS>
      <APPLICATION-RECORD-ELEMENT>
        <SHORT-NAME>Address</SHORT-NAME>
        <CATEGORY>VALUE</CATEGORY>
        <TYPE-TREF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">
          >/Catalogs/VSS/ApplicationDataTypes/Types/
          Address</TYPE-TREF>
        </APPLICATION-RECORD-ELEMENT>
      <APPLICATION-RECORD-ELEMENT>
        <SHORT-NAME>Receiver</SHORT-NAME>
        <CATEGORY>VALUE</CATEGORY>
        <TYPE-TREF DEST="APPLICATION-PRIMITIVE-DATA-TYPE">
          >/Catalogs/VSS/ApplicationDataTypes/Types/
          Receiver</TYPE-TREF>
        </APPLICATION-RECORD-ELEMENT>
      </ELEMENTS>
    </APPLICATION-RECORD-DATA-TYPE>
  </ELEMENTS>
  <AR-PACKAGES />
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.12: AUTOSAR ARXML representation of the Application Struct Data Type**

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0/AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Catalogs</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>VSS</SHORT-NAME>
                <ELEMENTS />
                <AR-PACKAGES>
                    <AR-PACKAGE>
                        <SHORT-NAME>ImplementationDataTypes</SHORT-NAME>
                        <ELEMENTS>
                            <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                                <SHORT-NAME>String</SHORT-NAME>
                                <DESC>
                                    <L-2 L="EN">Dynamic string implementation.</L-2>
                                </DESC>
                                <CATEGORY>STRING</CATEGORY>
                                <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
                            </STD-CPP-IMPLEMENTATION-DATA-TYPE>
                        </ELEMENTS>
                    <AR-PACKAGES>
                        <AR-PACKAGE>
                            <SHORT-NAME>Types</SHORT-NAME>
                            <ELEMENTS>
                                <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                                    <SHORT-NAME>Receiver</SHORT-NAME>
                                    <CATEGORY>TYPE_REFERENCE</CATEGORY>
                                    <NAMESPACES>
                                        <SYMBOL-PROPS>
                                            <SHORT-NAME>ns0</SHORT-NAME>
                                            <SYMBOL>covesa</SYMBOL>
                                        </SYMBOL-PROPS>
                                        <SYMBOL-PROPS>
                                            <SHORT-NAME>ns1</SHORT-NAME>
                                            <SYMBOL>vss</SYMBOL>
                                        </SYMBOL-PROPS>
                                    </NAMESPACES>
                                    <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
                                    <TYPE-REFERENCE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-TYPE">/Catalogs/VSS/ImplementationDataTypes/String</TYPE-REFERENCE-REF>
                                </STD-CPP-IMPLEMENTATION-DATA-TYPE>
                                <STD-CPP-IMPLEMENTATION-DATA-TYPE>
                                    <SHORT-NAME>Address</SHORT-NAME>
                                    <CATEGORY>TYPE_REFERENCE</CATEGORY>
                                    <NAMESPACES>
                                        <SYMBOL-PROPS>
                                            <SHORT-NAME>ns0</SHORT-NAME>
                                            <SYMBOL>covesa</SYMBOL>
                                        </SYMBOL-PROPS>
                                        <SYMBOL-PROPS>
                                            <SHORT-NAME>ns1</SHORT-NAME>

```

```

        <SYMBOL>vss</SYMBOL>
        </SYMBOL-PROPS>
    </NAMESPACES>
    <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
    <TYPE-REFERENCE-REF DEST="STD-CPP-IMPLEMENTATION-DATA-
        -TYPE">/Catalogs/VSS/ImplementationDataTypes/
        String</TYPE-REFERENCE-REF>
    </STD-CPP-IMPLEMENTATION-DATA-TYPE>
    <STD-CPP-IMPLEMENTATION-DATA-TYPE>
        <SHORT-NAME>DeliveryInfo</SHORT-NAME>
        <CATEGORY>STRUCTURE</CATEGORY>
        <SUB-ELEMENTS>
            <CPP-IMPLEMENTATION-DATA-TYPE-ELEMENT>
                <SHORT-NAME>Address</SHORT-NAME>
                <TYPE-REFERENCE>
                    <TYPE-REFERENCE-REF DEST="STD-CPP-
                        IMPLEMENTATION-DATA-TYPE">/Catalogs/VSS/
                        ImplementationDataTypes/Types/Address</TYPE-
                        REFERENCE-REF>
                </TYPE-REFERENCE>
            </CPP-IMPLEMENTATION-DATA-TYPE-ELEMENT>
            <CPP-IMPLEMENTATION-DATA-TYPE-ELEMENT>
                <SHORT-NAME>Receiver</SHORT-NAME>
                <TYPE-REFERENCE>
                    <TYPE-REFERENCE-REF DEST="STD-CPP-
                        IMPLEMENTATION-DATA-TYPE">/Catalogs/VSS/
                        ImplementationDataTypes/Types/Receiver</TYPE-
                        REFERENCE-REF>
                </TYPE-REFERENCE>
            </CPP-IMPLEMENTATION-DATA-TYPE-ELEMENT>
        </SUB-ELEMENTS>
        <TYPE-EMITTER>TYPE_EMITTER_ARA</TYPE-EMITTER>
    </STD-CPP-IMPLEMENTATION-DATA-TYPE>
        </ELEMENTS>
    </AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>
    
```

**Listing A.13: AUTOSAR ARXML representation of the Implementation Struct Data Type**

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://autosar.org/schema/r4.0/AUTOSAR_00049.xsd
    ">
    <AR-PACKAGES>
        <AR-PACKAGE>
            <SHORT-NAME>VehicleIdentification</SHORT-NAME>
            <ELEMENTS>
                <APPLICATION-PRIMITIVE-DATA-TYPE>
    
```

```

<SHORT-NAME>VIN</SHORT-NAME>
<DESC>
    <L-2 L="EN">17-character Vehicle Identification
        Number (VIN) as defined by ISO 3779.</L-2>
</DESC>
<CATEGORY>STRING</CATEGORY>
<ADMIN-DATA>
    <SDGS>
        <SDG GID="VSS">
            <SD GID="myVSSKey">myVSSValue</SD>
            <SD GID="anotherVSSKey">anotherVSSValue</SD>
        </SDG>
    </SDGS>
</ADMIN-DATA>
</APPLICATION-PRIMITIVE-DATA-TYPE>
</ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AUTOSAR>

```

**Listing A.14: AUTOSAR ARXML representation of arbitrary VSS node key value pairs**

### A.2.5 VISS Specific Model Extension

This is an example of the VISS specific model extensions. Note that model extensions are not part of the main arxml model file.

```

<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.
org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/
schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>Extensions</SHORT-NAME>
        <AR-PACKAGES>
            <AR-PACKAGE>
                <SHORT-NAME>ADAPTIVE</SHORT-NAME>
                <ELEMENTS>
                    <SDG-DEF>
                        <SHORT-NAME>UserDefinedVISSBindingExtensionModel</SHORT-NAME>
                        <ADMIN-DATA>
                            <SDGS>
                                <SDG GID="VISSMex-version">
                                    <SD>1.0.0</SD>
                                </SDG>
                            </SDGS>
                        </ADMIN-DATA>
                        <SDG-CLASSES>
                            <!-- Provided VISS Service Instance -->
                            <SDG-CLASS>
                                <SHORT-NAME>ProvidedVISSServiceInstanceExtension</SHORT-
NAME>
                                <EXTENDS-META-CLASS>ProvidedUserDefinedServiceInstance</
EXTENDS-META-CLASS>
                                <ATTRIBUTES>

```

```

<SDG-AGGREGATION-WITH-VARIATION>
  <SHORT-NAME>userDefinedVISSBinding</SHORT-NAME>
  <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
  <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
  <VARIATION>false</VARIATION>
  <SUB-SDG-REF DEST="SDG-CLASS">/Extensions/ADAPTIVE/
    UserDefinedVISSBindingExtensionModel/
    ProvidedVISServiceInstance</SUB-SDG-REF>
  </SDG-AGGREGATION-WITH-VARIATION>
</ATTRIBUTES>
</SDG-CLASS>
<SDG-CLASS>
  <SHORT-NAME>ProvidedVISServiceInstance</SHORT-NAME>
  <DESC>
    <L-2 L="FOR-ALL">Stores the VISS Binding data of the
      ProvidedUserDefinedServiceInstance</L-2>
  </DESC>
  <ATTRIBUTES>
    <SDG-PRIMITIVE-ATTRIBUTE>
      <SHORT-NAME>vssInstancePath</SHORT-NAME>
      <DESC>
        <L-2 L="FOR-ALL">The service instance vss path</L-2>
      </DESC>
      <CATEGORY>STRING</CATEGORY>
      <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
      <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
    </SDG-PRIMITIVE-ATTRIBUTE>
  </ATTRIBUTES>
</SDG-CLASS>
<SDG-CLASS>
  <SHORT-NAME>Version</SHORT-NAME>
  <ATTRIBUTES>
    <SDG-PRIMITIVE-ATTRIBUTE>
      <SHORT-NAME>major</SHORT-NAME>
      <DESC>
        <L-2 L="FOR-ALL">The major version (32 bit unsigned
          integer)</L-2>
      </DESC>
      <CATEGORY>INTEGER</CATEGORY>
      <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
      <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
      <MAX>0xFFFFFFFF</MAX>
      <MIN>0</MIN>
    </SDG-PRIMITIVE-ATTRIBUTE>
    <SDG-PRIMITIVE-ATTRIBUTE>
      <SHORT-NAME>minor</SHORT-NAME>
      <DESC>
        <L-2 L="FOR-ALL">The minor version (32 bit unsigned
          integer) of all offered service instances.
      </L-2>
      This minor version is only relevant for skeleton-side
      service offers.</L-2>
      </DESC>
      <CATEGORY>INTEGER</CATEGORY>
      <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
      <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
    </SDG-PRIMITIVE-ATTRIBUTE>
  </ATTRIBUTES>
</SDG-CLASS>

```

```

<MAX>0xFFFFFFFF</MAX>
<MIN>0</MIN>
</SDG-PRIMITIVE-ATTRIBUTE>
</ATTRIBUTES>
</SDG-CLASS>
<!-- VISS Service Interface Deployment -->
<SDG-CLASS>
<SHORT-NAME>
    VISSBindingServiceInterfaceDeploymentExtension</SHORT-
    NAME>
<EXTENDS-META-CLASS>UserDefinedServiceInterfaceDeployment
</EXTENDS-META-CLASS>
<ATTRIBUTES>
    <SDG-AGGREGATION-WITH-VARIATION>
        <SHORT-NAME>userDefinedVISSBinding</SHORT-NAME>
        <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
        <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
        <VARIATION>false</VARIATION>
        <SUB-SDG-REF DEST="SDG-CLASS">/Extensions/ADAPTIVE/
            UserDefinedVISSBindingExtensionModel/
            VISSBindingServiceInterfaceDeployment</SUB-SDG-REF
        >
    </SDG-AGGREGATION-WITH-VARIATION>
</ATTRIBUTES>
</SDG-CLASS>
<SDG-CLASS>
<SHORT-NAME>VISSBindingServiceInterfaceDeployment</SHORT-
    NAME>
<DESC>
    <L-2 L="FOR-ALL">Stores the VISSBinding data of the
        UserDefinedServiceInterfaceDeployment</L-2>
</DESC>
<ATTRIBUTES>
    <SDG-PRIMITIVE-ATTRIBUTE>
        <SHORT-NAME>serviceInterfacePath</SHORT-NAME>
        <DESC>
            <L-2 L="FOR-ALL">The VSS type path of the service
                interface(string)</L-2>
        </DESC>
        <CATEGORY>INTEGER</CATEGORY>
        <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
        <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
        <MAX>0xFFFFFFFF</MAX>
        <MIN>0</MIN>
    </SDG-PRIMITIVE-ATTRIBUTE>
    <SDG-AGGREGATION-WITH-VARIATION>
        <SHORT-NAME>serviceInterfaceVersion</SHORT-NAME>
        <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
        <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
        <VARIATION>false</VARIATION>
        <SUB-SDG-REF DEST="SDG-CLASS">/Extensions/ADAPTIVE/
            UserDefinedVISSBindingExtensionModel/Version</SUB-
            SDG-REF>
    </SDG-AGGREGATION-WITH-VARIATION>
</ATTRIBUTES>
</SDG-CLASS>

```

```

<SDG-CLASS>
    <SHORT-NAME>VISSBindingEventDeploymentExtension</SHORT-
        NAME>
    <EXTENDS-META-CLASS>UserDefinedEventDeployment</EXTENDS-
        META-CLASS>
    <ATTRIBUTES>
        <SDG-AGGREGATION-WITH-VARIATION>
            <SHORT-NAME>userDefinedVISSBinding</SHORT-NAME>
            <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
            <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
            <VARIATION>false</VARIATION>
            <SUB-SDG-REF DEST="SDG-CLASS">/Extensions/ADAPTIVE/
                UserDefinedVISSBindingExtensionModel/
                VISSBindingEventDeployment</SUB-SDG-REF>
        </SDG-AGGREGATION-WITH-VARIATION>
    </ATTRIBUTES>
</SDG-CLASS>
<SDG-CLASS>
    <SHORT-NAME>VISSBindingEventDeployment</SHORT-NAME>
    <DESC>
        <L-2 L="FOR-ALL">Stores the VISSBinding data of the
            UserDefinedEventDeployment</L-2>
    </DESC>
    <ATTRIBUTES />
</SDG-CLASS>
<SDG-CLASS>
    <SHORT-NAME>VISSBindingMethodDeploymentExtension</SHORT-
        NAME>
    <EXTENDS-META-CLASS>UserDefinedMethodDeployment</EXTENDS-
        META-CLASS>
    <ATTRIBUTES>
        <SDG-AGGREGATION-WITH-VARIATION>
            <SHORT-NAME>userDefinedVISSBinding</SHORT-NAME>
            <LOWER-MULTIPLICITY>0</LOWER-MULTIPLICITY>
            <UPPER-MULTIPLICITY>1</UPPER-MULTIPLICITY>
            <VARIATION>false</VARIATION>
            <SUB-SDG-REF DEST="SDG-CLASS">/Extensions/ADAPTIVE/
                UserDefinedVISSBindingExtensionModel/
                VISSBindingMethodDeployment</SUB-SDG-REF>
        </SDG-AGGREGATION-WITH-VARIATION>
    </ATTRIBUTES>
</SDG-CLASS>
<SDG-CLASS>
    <SHORT-NAME>VISSBindingMethodDeployment</SHORT-NAME>
    <DESC>
        <L-2 L="FOR-ALL">Stores the VISSBinding data of the
            UserDefinedMethodDeployment</L-2>
    </DESC>
    <ATTRIBUTES />
</SDG-CLASS>
</SDG-CLASSES>
</SDG-DEF>
</ELEMENTS>
</AR-PACKAGE>
</AR-PACKAGES>
</AR-PACKAGE>

```

```
</AR-PACKAGES>
</AUTOSAR>
```

**Listing A.15: VISS Model Extension****A.2.6 User Defined VISS Service Deployments**

```
<?xml version="1.0" encoding="UTF-8"?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd">
<AR-PACKAGES>
  <AR-PACKAGE>
    <SHORT-NAME>Catalogs</SHORT-NAME>
    <ELEMENTS />
    <AR-PACKAGES>
      <AR-PACKAGE>
        <SHORT-NAME>VSS</SHORT-NAME>
        <ELEMENTS />
        <AR-PACKAGES>
          <AR-PACKAGE>
            <SHORT-NAME>ServiceInterfaces</SHORT-NAME>
            <ELEMENTS />
            <AR-PACKAGES>
              <AR-PACKAGE>
                <SHORT-NAME>Vehicle</SHORT-NAME>
                <ELEMENTS>
                  <SERVICE-INTERFACE UUID="29987d97-5605-49a8-a378-c6478d055292">
                    <SHORT-NAME>Vehicle</SHORT-NAME>
                    <FIELDS>
                      <FIELD UUID="17b45063-f713-4904-bb60-37969a7ce346">
                        <SHORT-NAME>LowVoltageSystemState</SHORT-NAME>
                        <!--<TYPE-TREF DEST="STD-CPP-IMPLEMENTATION-DATA-TYPE">/Catalogues/ImplementationDataTypes/VehicleSignalSpecification/Vehicle/LowVoltageSystemState</TYPE-TREF>-->
                        <HAS-GETTER>true</HAS-GETTER>
                        <HAS-NOTIFIER>true</HAS-NOTIFIER>
                        <HAS-SETTER>true</HAS-SETTER>
                      </FIELD>
                    </FIELDS>
                  </SERVICE-INTERFACE>
                </ELEMENTS>
              </AR-PACKAGE>
            </AR-PACKAGES>
          </AR-PACKAGE>
        <AR-PACKAGE>
          <SHORT-NAME>VISSIPServiceInterfaceDeployments</SHORT-NAME>
          <ELEMENTS />
          <AR-PACKAGES>
            <AR-PACKAGE>
              <SHORT-NAME>Vehicle</SHORT-NAME>
              <ELEMENTS>
```

```

<USER-DEFINED-SERVICE-INTERFACE-DEPLOYMENT>
    <SHORT-NAME>Vehicle</SHORT-NAME>
    <ADMIN-DATA>
        <SDGS>
            <SDG GID="
                VISSMex:VISSBindingServiceInterfaceDeploymentExtension
                ">
                <SD GID="VISSMex-version">1.0.0</SD>
                <SDG GID="userDefinedVISSBinding">
                    <SDG GID="
                        VISSBindingServiceInterfaceDeployment" />
                </SDG>
            </SDG>
        </SDGS>
    </ADMIN-DATA>
    <FIELD-DEPLOYMENTS>
        <USER-DEFINED-FIELD-DEPLOYMENT>
            <SHORT-NAME>LowVoltageSystemState</SHORT-NAME>
            <FIELD-REF DEST="FIELD">/Catalogs/VSS/
                ServiceInterfaces/Vehicle/Vehicle/
                LowVoltageSystemState</FIELD-REF>
            <GET>
                <SHORT-NAME>getLowVoltageSystemState</SHORT-
                    NAME>
                <ADMIN-DATA>
                    <SDGS>
                        <SDG GID="
                            VISSMex:VISSBindingMethodDeploymentExtension
                            ">
                            <SD GID="VISSMex-version">1.0.0</SD>
                            <SDG GID="userDefinedVISSBinding">
                                <SDG GID="VISSBindingMethodDeployment" /
                            </SDG>
                            </SDG>
                        </SDGS>
                </ADMIN-DATA>
            </GET>
            <NOTIFIER>
                <SHORT-NAME>onLowVoltageSystemState</SHORT-NAME
                >
                <ADMIN-DATA>
                    <SDGS>
                        <SDG GID="
                            VISSMex:VISSBindingEventDeploymentExtension
                            ">
                            <SD GID="VISSMex-version">1.0.0</SD>
                            <SDG GID="userDefinedVISSBinding">
                                <SDG GID="VISSBindingEventDeployment" /
                            </SDG>
                            </SDG>
                        </SDGS>
                </ADMIN-DATA>
            </NOTIFIER>
        </USER-DEFINED-FIELD-DEPLOYMENT>
    
```

```

        </FIELD-DEPLOYMENTS>
        </USER-DEFINED-SERVICE-INTERFACE-DEPLOYMENT>
        </ELEMENTS>
        </AR-PACKAGE>
        </AR-PACKAGES>
        </AR-PACKAGE>
        </AR-PACKAGES>
        </AR-PACKAGE>
        </AR-PACKAGES>
        </AR-PACKAGE>
        </AR-PACKAGES>
</AUTOSAR>

```

**Listing A.16: User Defined Service Interface Deployments**

### A.2.7 Provided Service Instances

```

<?xml version='1.0' encoding='UTF-8'?>
<AUTOSAR xmlns="http://autosar.org/schema/r4.0"
           xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
           xsi:schemaLocation="http://autosar.org/schema/r4.0_AUTOSAR_00049.xsd
           ">
<AR-PACKAGES>
    <AR-PACKAGE>
        <SHORT-NAME>APIGateway</SHORT-NAME>
        <ELEMENTS>
            <PROVIDED-USER-DEFINED-SERVICE-INSTANCE>
                <SHORT-NAME>P_Vehicle</SHORT-NAME>
                <ADMIN-DATA>
                    <SDGS>
                        <SDG GID="
                            VISSMex:ProvidedVISSServiceInstanceExtension
                            ">
                            <SD GID="VISSMex-version">1.0.0</SD>
                            <SDG GID="userDefinedVISSBinding">
                                <SDG GID="ProvidedVISSServiceInstance">
                                    <SD GID="vssPath">Vehicle</SD>
                                </SDG>
                            </SDG>
                        </SDGS>
                    </ADMIN-DATA>
                    <!--<SERVICE-INTERFACE-DEPLOYMENT-REF DEST="USER-
                         DEFINED-SERVICE-INTERFACE-DEPLOYMENT">/Catalogs/VSS/
                         VISSServiceInterfaceDeployments/Vehicle</SERVICE-
                         INTERFACE-DEPLOYMENT-REF>-->
                </PROVIDED-USER-DEFINED-SERVICE-INSTANCE>
            </ELEMENTS>
        </AR-PACKAGE>
    </AR-PACKAGES>
</AUTOSAR>

```

**Listing A.17: Provided User Defined Service Instance Model**

## B Change History of AUTOSAR Traceable Items

Please note that the lists in this chapter also include traceable items that have been removed from the specification in a later version. These items do not appear as hyper-links in the document.

### B.1 Traceable item history of this document according to AUTOSAR Release R24-11

#### B.1.1 Added Specification Items in R24-11

Number	Heading
[AP_TR_VSS_01010]	Catalog VSS
[AP_TR_VSS_01018]	Package VSS Versions
[AP_TR_VSS_01019]	VSS Branch Mapping for Types as ARPackage Structure
[AP_TR_VSS_02001]	VSS Primitive Implementation Data Types
[AP_TR_VSS_02003]	VSS Primitive String Type
[AP_TR_VSS_02010]	Application Data Type
[AP_TR_VSS_02011]	Application Data Type Name
[AP_TR_VSS_02021]	StdCppImplementationDataType
[AP_TR_VSS_02022]	StdCppImplementationDataType Name
[AP_TR_VSS_02023]	StdCppImplementationDataType Namespace
[AP_TR_VSS_02051]	DataTypeMappingSet Location
[AP_TR_VSS_02052]	DataTypeMapping
[AP_TR_VSS_02061]	Data Constraint per Data Type
[AP_TR_VSS_02062]	Data Constraint Limits
[AP_TR_VSS_02063]	Data Constraint Location
[AP_TR_VSS_02064]	Data Constraint Naming
[AP_TR_VSS_02071]	VSS Primitive Types Boundary Restrictions
[AP_TR_VSS_02072]	VSS String Enum Restrictions
[AP_TR_VSS_02402]	VSS Units
[AP_TR_VSS_03101]	Application Array Data Type
[AP_TR_VSS_03102]	Application Array Data Type Reference
[AP_TR_VSS_03103]	Application Array Size Handling
[AP_TR_VSS_03104]	Application Array Name
[AP_TR_VSS_03105]	Application Array Element Data Type
[AP_TR_VSS_03106]	Application Array Element Name
[AP_TR_VSS_03110]	C++ Implementation Array Data Type
[AP_TR_VSS_03111]	C++ Implementation Array Data Reference



△

Number	Heading
[AP_TR_VSS_03112]	C++ Implementation Array Name
[AP_TR_VSS_03201]	Application Record Data Type
[AP_TR_VSS_03202]	Application Record Name
[AP_TR_VSS_03203]	Application Record Element Type
[AP_TR_VSS_03204]	Application Record Element Type Reference
[AP_TR_VSS_03211]	C++ Implementation Struct Data Type
[AP_TR_VSS_03212]	C++ Implementation Element Type Reference
[AP_TR_VSS_03213]	C++ Implementation Struct Array Name
[AP_TR_VSS_03214]	C++ Implementation Element Array Name
[AP_TR_VSS_04003]	VSS Units Package
[AP_TR_VSS_04401]	Common Unit Mapping
[AP_TR_VSS_04404]	VSS Units Reference
[AP_TR_VSS_04440]	VSS Description Base Structure
[AP_TR_VSS_04441]	VSS Description Base Structure
[AP_TR_VSS_04442]	VSS Description
[AP_TR_VSS_04443]	VSS Comment Base Structure
[AP_TR_VSS_04444]	VSS Comment
[AP_TR_VSS_04450]	VSS Key and Value Base Structure
[AP_TR_VSS_04451]	VSS Key and Value modelling
[AP_TR_VSS_05011]	AutomotiveAPI
[AP_TR_VSS_05201]	Service Interfaces
[AP_TR_VSS_05202]	Data Retrieval
[AP_TR_VSS_05203]	Data Updates
[AP_TR_VSS_05210]	VISS/VSS Service Deployments
[AP_TR_VSS_05211]	VISS/VSS Field Deployments
[AP_TR_VSS_05212]	VISS/VSS Set Method Deployments
[AP_TR_VSS_05213]	VISS/VSS Field Get Deployments
[AP_TR_VSS_05214]	VISS/VSS Field Notifier Deployments
[AP_TR_VSS_05215]	User Defined VISS Service Instance
[AP_TR_VSS_05220]	Provided Service Instance Package Structure
[AP_TR_VSS_05221]	Provided Service Instance
[AP_TR_VSS_05222]	Provided Service Instance VSS Path
[AP_TR_VSS_05223]	Provided Service Instance Deployment Reference
[AP_TR_VSS_05301]	Gateway Software Component
[AP_TR_VSS_05302]	Provided Ports Prototype
[AP_TR_VSS_05303]	Provided Ports Prototype Short Name
[AP_TR_VSS_05304]	Provided Interface
[AP_TR_VSS_05305]	Service Instance to Port Prototype Mapping

▽

△

Number	Heading
[AP_TR_VSS_05306]	Provided Ports Prototype Long Name

**Table B.1: Added Specification Items in R24-11**

### B.1.2 Changed Specification Items in R24-11

none

### B.1.3 Deleted Specification Items in R24-11

none