

|                                   |   |
|-----------------------------------|---|
| <b>Document Title</b>             | Specification of Crypto Service Manager |
| <b>Document Owner</b>             | AUTOSAR                                 |
| <b>Document Responsibility</b>    | AUTOSAR                                 |
| <b>Document Identification No</b> | 402                                     |

|                                 |                  |
|---------------------------------|------------------|
| <b>Document Status</b>          | published        |
| <b>Part of AUTOSAR Standard</b> | Classic Platform |
| <b>Part of Standard Release</b> | R24-11           |

| <b>Document Change History</b> |                |                            |   |
|--------------------------------|----------------|----------------------------|---|
| <b>Date</b>                    | <b>Release</b> | <b>Changed by</b>          | <b>Description</b>  |
| 2024-11-27                     | R24-11         | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Add configuration, cryptographic primitives and schemes for AES KeyWrap and KeyUnwrap<br/><a href="#">Csm_JobKeyWrap()</a><br/><a href="#">Csm_JobKeyUnwrap()</a></li> <li>• Add CRYPTO_E_KEY_EMPTY error for <a href="#">Csm_RandomSeed()</a> and CsmJobRandomSeed service interface</li> <li>• Add CRYPTO_E_CUSTOM_ERROR error for reporting custom processing failure</li> <li>• Editorial changes</li> </ul> |
| 2023-11-23                     | R23-11         | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Add AES Key Wrap support</li> <li>• Remove inconsistency in parameter types and const type modifier</li> <li>• Remove key location check in <a href="#">Csm_KeyCopy()</a></li> <li>• Editorial changes</li> </ul>  |





|            |        |                            |   |
|------------|--------|----------------------------|---|
| 2022-11-24 | R22-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• New Feature: Addition of the <code>CsmCustom</code> service for vendor customized security services.</li> <li>• Removal of certificate functionality (moved to KeyM and replaced by <code>CsmCustom</code> services)</li> <li>• Editorial changes</li> </ul>   |
| 2021-11-25 | R21-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Harmonize definition of <code>CRYPTO_ALGOMODE</code> between CryptoDrv and Csm</li> <li>• Added key format description in CSM/Crypto Driver for SHE-keys</li> <li>• Added Clarification on seeding and generation of random numbers in the crypto stack</li> <li>• removed superfluous parameter <code>keyId</code> in <code>CsmJobXXX</code> interface operations</li> <li>• Editorial changes</li> </ul> |
| 2020-11-30 | R20-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• New feature: Save and Restore Context for running crypto operation</li> <li>• New feature: <code>KeyGetStatus</code> and <code>KeySetInvalid</code></li> <li>• Updated Algorithm Families</li> <li>• Support of Multicore</li> <li>• Removing inconsistency in parameter names.</li> <li>• Editorial changes</li> </ul>  |





|            |        |                            |   |
|------------|--------|----------------------------|---|
| 2019-11-28 | R19-11 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Bringing return values of all services and interfaces to one line</li> <li>• added functionality and description of elliptic curves</li> <li>• Callback notification modified</li> <li>• Editorial changes</li> <li>• Changed Document Status from Final to published</li> </ul> |
| 2018-10-31 | 4.4.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Client-Server-Interfaces Csm&lt;Service&gt;_{Config}</li> <li>• corrected CS interfaces</li> <li>• removal of references to CryptoAbstractionLibrary</li> </ul>  |
| 2017-12-08 | 4.3.1  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Added definition for asymmetric key formats</li> <li>• Error fixing and consistency improvements</li> <li>• Editorial changes</li> </ul>   |
| 2016-11-30 | 4.3.0  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Introduced crypto job concept</li> <li>• Introduced key management concept</li> <li>• Removed Cry_XXX functions from the Csm and introduced two new layers in the crypto stack: Crypto Interface (CryIf) and Crypto Driver (Crypto)</li> </ul>                                   |
| 2015-07-31 | 4.2.2  | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Changed return type from <a href="#">Csm_ReturnType</a> to Std_Types in all API functions</li> <li>• Added detailed description of RTE interfaces</li> <li>• Debugging support marked as obsolete</li> <li>• Error fixing and consistency improvements</li> </ul>                |



△

|            |       |                            |  |
|------------|-------|----------------------------|--|
| 2014-10-31 | 4.2.1 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Obsolete configuration elements removed</li> <li>• Error fixing and consistency improvements</li> <li>• Editorial changes</li> </ul>  |
| 2014-03-31 | 4.1.3 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Error fixing and consistency improvements</li> <li>• Editorial changes</li> </ul>   |
| 2013-10-31 | 4.1.2 | AUTOSAR Release Management | <ul style="list-style-type: none"> <li>• Error fixing and consistency improvements</li> <li>• Editorial changes</li> <li>• Removed chapter(s) on change documentation</li> </ul>   |
| 2013-03-15 | 4.1.1 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Services for compression/decompression added</li> <li>• Services for key update added (Concept 'CSM extension')</li> <li>• Services for symmetric key generation added (Concept 'CSM extension')</li> <li>• Service state machine changed to cope with terminated users by releasing of locked resources</li> <li>• Production errors restructured</li> </ul> |
| 2011-12-22 | 4.0.3 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Fixed issues with AUTOSAR Port Interfaces</li> </ul>  |
| 2010-09-30 | 3.1.5 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Complete Configuration parameters</li> <li>• Complete API specifications</li> <li>• Add support for secure key storage</li> <li>• Integration of support for key transport services</li> <li>• Introduction of new DET error (checking of the null pointer in getversion info).</li> </ul>  |
| 2010-02-02 | 3.1.4 | AUTOSAR Administration     | <ul style="list-style-type: none"> <li>• Initial release</li> </ul>  |

## Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

## Contents

|         |   |    |
|---------|---|----|
| 1       | Introduction and functional overview              | 10 |
| 2       | Acronyms and Abbreviations                        | 11 |
| 3       | Related documentation                             | 13 |
| 3.1     | Input documents & related standards and norms     | 13 |
| 3.2     | Related specification                             | 13 |
| 4       | Constraints and assumptions                       | 14 |
| 4.1     | Limitations                                       | 14 |
| 4.2     | Applicability to car domains                      | 14 |
| 4.3     | Security Implications                             | 14 |
| 5       | Dependencies to other modules                     | 15 |
| 6       | Requirements Tracing                              | 16 |
| 7       | Functional specification                          | 19 |
| 7.1     | Basic Architecture Guidelines                     | 19 |
| 7.2     | General Behavior                                  | 21 |
| 7.2.1   | Normal Operation                                  | 22 |
| 7.2.1.1 | Configuration                                     | 23 |
| 7.2.1.2 | Synchronous Job Processing                        | 24 |
| 7.2.1.3 | Asynchronous Job Processing                       | 24 |
| 7.2.2   | Design Notes                                      | 25 |
| 7.2.2.1 | CSM module startup                                | 25 |
| 7.2.2.2 | Crypto Services                                   | 25 |
| 7.2.2.3 | Key Management                                    | 29 |
| 7.2.2.4 | Redirection of Input and/or Output of Crypto Jobs | 32 |
| 7.2.2.5 | Job context interface                             | 33 |
| 7.3     | Error Classification                              | 34 |
| 7.3.1   | Development Errors                                | 34 |
| 7.3.2   | Runtime Errors                                    | 35 |
| 7.3.3   | Production Errors                                 | 35 |
| 7.3.4   | Extended Production Errors                        | 35 |
| 7.4     | Error Detection                                   | 35 |
| 7.5     | Multicore   | 36 |
| 7.6     | Security Events                                   | 36 |
| 8       | API specification                                 | 37 |
| 8.1     | Imported types                                    | 37 |
| 8.2     | Type definitions                                  | 37 |
| 8.3     | Function definitions                              | 47 |
| 8.3.1   | General Interface                                 | 48 |
| 8.3.2   | Hash Interface                                    | 49 |

|          |  |     |
|----------|--|-----|
| 8.3.3    | MAC Interface . . . . .  | 50  |
| 8.3.4    | CipherInterface . . . . .  | 52  |
| 8.3.5    | Authenticated Encryption with Associated Data (AEAD) Interface . . . . . | 53  |
| 8.3.6    | Signature Interface . . . . .  | 55  |
| 8.3.7    | Random Interface . . . . .   | 57  |
| 8.3.8    | Key Management Interface . . . . .                                       | 58  |
| 8.3.8.1  | Key Setting Interface . . . . .  | 59  |
| 8.3.8.2  | Key Status Interface . . . . .   | 61  |
| 8.3.8.3  | Key Extraction Interface . . . . .                                       | 61  |
| 8.3.8.4  | Key Copying Interface . . . . .  | 62  |
| 8.3.8.5  | Key Generation Interface . . . . .                                       | 66  |
| 8.3.8.6  | Key Derivation Interface . . . . .                                       | 68  |
| 8.3.8.7  | Key Exchange Interface . . . . .   | 69  |
| 8.3.9    | Cryptographic Primitives and Schemes . . . . .                           | 71  |
| 8.3.10   | Context Save and Restore . . . . .                                       | 77  |
| 8.3.11   | Job Cancellation Interface . . . . .                                     | 79  |
| 8.3.12   | Custom Interface . . . . .   | 80  |
| 8.3.12.1 | Custom Service Interface . . . . .                                       | 80  |
| 8.3.12.2 | Custom Sync Interface . . . . .  | 81  |
| 8.4      | Callback notifications . . . . .   | 82  |
| 8.5      | Scheduled functions . . . . .  | 82  |
| 8.6      | Expected interfaces . . . . .  | 83  |
| 8.6.1    | Mandatory interfaces . . . . .   | 83  |
| 8.6.2    | Optional interfaces . . . . .  | 84  |
| 8.6.3    | Configurable interfaces . . . . .  | 84  |
| 8.7      | Service Interfaces . . . . .   | 85  |
| 8.7.1    | Client-Server-Interfaces . . . . .                                       | 86  |
| 8.7.2    | Client-Server Interfaces (DATA_REFERENCES) . . . . .                     | 104 |
| 8.7.3    | Client-Server-Interfaces (Key Management) . . . . .                      | 120 |
| 8.7.4    | Client-Server-Interfaces (Context Service) . . . . .                     | 130 |
| 8.7.5    | Client-Server-Interface Callbacks . . . . .                              | 131 |
| 8.7.6    | Implementation Data Types . . . . .                                      | 131 |
| 8.7.7    | Ports . . . . .  | 143 |
| 9        | Sequence diagrams . . . . .  | 146 |
| 9.1      | Asynchronous Calls . . . . .   | 146 |
| 9.2      | Synchronous Calls . . . . .  | 146 |
| 10       | Configuration specification . . . . .                                    | 148 |
| 10.1     | How to read this chapter . . . . .                                       | 148 |
| 10.2     | Containers and configuration parameters . . . . .                        | 148 |
| 10.2.1   | Csm . . . . .  | 149 |
| 10.2.2   | CsmGeneral . . . . .   | 150 |
| 10.2.3   | CsmMainFunction . . . . .  | 151 |
| 10.2.4   | CsmJobs . . . . .  | 154 |
| 10.2.5   | CsmJob . . . . .   | 155 |

|         |                                   |     |
|---------|-----------------------------------|-----|
| 10.2.6  | CsmKeys                           | 160 |
| 10.2.7  | CsmKey                            | 161 |
| 10.2.8  | CsmQueues                         | 163 |
| 10.2.9  | CsmQueue                          | 164 |
| 10.2.10 | CsmInOutRedirections              | 166 |
| 10.2.11 | CsmInOutRedirection               | 167 |
| 10.2.12 | CsmPrimitives                     | 173 |
| 10.2.13 | CsmHash                           | 175 |
| 10.2.14 | CsmHashConfig                     | 176 |
| 10.2.15 | CsmMacGenerate                    | 182 |
| 10.2.16 | CsmMacGenerateConfig              | 183 |
| 10.2.17 | CsmMacVerify                      | 190 |
| 10.2.18 | CsmMacVerifyConfig                | 191 |
| 10.2.19 | CsmEncrypt                        | 198 |
| 10.2.20 | CsmEncryptConfig                  | 200 |
| 10.2.21 | CsmDecrypt                        | 207 |
| 10.2.22 | CsmDecryptConfig                  | 210 |
| 10.2.23 | CsmAEADEncrypt                    | 216 |
| 10.2.24 | CsmAEADEncryptConfig              | 218 |
| 10.2.25 | CsmAEADDecrypt                    | 226 |
| 10.2.26 | CsmAEADDecryptConfig              | 228 |
| 10.2.27 | CsmSignatureGenerate              | 236 |
| 10.2.28 | CsmSignatureGenerateConfig        | 238 |
| 10.2.29 | CsmSignatureVerify                | 244 |
| 10.2.30 | CsmSignatureVerifyConfig          | 245 |
| 10.2.31 | CsmRandomGenerate                 | 252 |
| 10.2.32 | CsmRandomGenerateConfig           | 254 |
| 10.2.33 | CsmCustom                         | 259 |
| 10.2.34 | CsmCustomConfig                   | 260 |
| 10.2.35 | CsmJobKeySetValid                 | 267 |
| 10.2.36 | CsmJobKeySetValidConfig           | 268 |
| 10.2.37 | CsmJobKeySetInvalid               | 272 |
| 10.2.38 | CsmJobKeySetInvalidConfig         | 273 |
| 10.2.39 | CsmJobRandomSeed                  | 277 |
| 10.2.40 | CsmJobRandomSeedConfig            | 280 |
| 10.2.41 | CsmJobKeyDerive                   | 285 |
| 10.2.42 | CsmJobKeyDeriveConfig             | 287 |
| 10.2.43 | CsmJobKeyGenerate                 | 292 |
| 10.2.44 | CsmJobKeyGenerateConfig           | 293 |
| 10.2.45 | CsmJobKeyExchangeCalcPubVal       | 297 |
| 10.2.46 | CsmJobKeyExchangeCalcPubValConfig | 298 |
| 10.2.47 | CsmJobKeyExchangeCalcSecret       | 302 |
| 10.2.48 | CsmJobKeyExchangeCalcSecretConfig | 303 |
| 10.2.49 | CsmCallbacks                      | 306 |
| 10.2.50 | CsmCallback                       | 307 |
| 10.2.51 | CsmJobKeyWrap                     | 309 |



|         |                       |     |
|---------|-----------------------|-----|
| 10.2.52 | CsmJobKeyWrapConfig   | 310 |
| 10.2.53 | CsmJobKeyUnwrap       | 314 |
| 10.2.54 | CsmJobKeyUnwrapConfig | 315 |
| 10.3    | Published Information | 319 |

# 1 Introduction and functional overview

This specification specifies the functionality, API and the configuration of the software module Crypto Service Manager (CSM) to satisfy the top-level requirements represented in the CSM Requirements Specification [1].

The CSM shall provide synchronous or asynchronous services to enable a unique access to basic cryptographic functionalities for all software modules. The CSM shall provide an abstraction layer, which offers a standardized interface to higher software layers to access these functionalities.

The functionality required by a software module can be different to the functionality required by other software modules. For this reason, there shall be the possibility to configure and initialize the services provided by the CSM individually for each software module. This configuration comprises as well the selection of synchronous or asynchronous processing of the CSM services.

The construction of the CSM module follows a generic approach. Wherever a detailed specification of structures and interfaces would limit the scope of the usability of the CSM, interfaces and structures are defined in a generic way. This provides an opportunity for future extensions.

## 2 Acronyms and Abbreviations

The glossary below includes acronyms and abbreviations relevant to the Crypto Service Manager module that are not included in the [2, AUTOSAR glossary].

| <b>Abbreviation / Acronym:</b> | <b>Description:</b>                           |
|--------------------------------|---|
| AEAD                           | Authenticated Encryption with Associated Data |
| CDD                            | Complex Device Driver                         |
| CSM                            | Crypto Service Manager                        |
| CRYIF                          | Crypto Interface [3]                          |
| CRYPTO                         | Crypto Driver [4]                             |
| DET                            | Default Error Tracer [5]                      |
| HSM                            | Hardware Security Module                      |
| HW                             | Hardware                                      |
| SHE                            | Security Hardware Extension                   |
| SW                             | Software                                      |

**Table 2.1: Acronyms and abbreviations used in the scope of this Document**

| <b>Terms:</b>        | <b>Description:</b>  |   |   |        |   |
|----------------------|--|---|---|--------|---|
| Crypto Driver Object | <p>A Crypto Driver implements one or more Crypto Driver Objects. The Crypto Driver Object can offer different crypto primitives in hardware or software. The Crypto Driver Objects of one Crypto Driver are independent of each other.</p> <p>There is only one workspace for each Crypto Driver Object (i.e. only one crypto primitive can be performed at the same time)</p>                                   |   |   |        |   |
| Key                  | <p>A Key can be referenced by a job in the Csm.</p> <p>In the Crypto Driver, the key refers a specific key type.</p>   |   |   |        |   |
| Key Type             | <p>A key type consists of refers to key elements.</p> <p>The key types are typically pre-configured by the vendor of the Crypto Driver.</p>  |   |   |        |   |
| Key Element          | <p>Key elements are used to store data. This data can be e.g. key material or the IV needed for AES encryption.</p> <p>It can also be used to configure the behaviour of the key management functions. Key elements from different keys have different memory area (both NV and RAM area).</p>   |   |   |        |   |
| Job                  | <p>A Job is a configured 'CsmJob'. Among others, it refers to a key, a cryptographic primitive and a reference channel.</p>  |   |   |        |   |
| Channel              | <p>A channel is the path from a Crypto Service Manager queue via the Crypto Interface to a specific Crypto Driver Object.</p>  |   |   |        |   |
| Primitive            | <p>A primitive is an instance of a configured cryptographic algorithm realized in a Crypto Driver Object. Among others it refers to a functionality provided by the CSM to the application, the concrete underlining 'algorithmfamily' (e.g. AES, MD5, RSA, etc.), and a 'algorithmmode' (e.g. ECB, CBC, etc).</p>   |   |   |        |   |
| Operation            | <p>An operation of a crypto primitive declares what part of the crypto primitive shall be performed. There are three different operations:</p>   |   |   |        |   |
|                      | <table border="1"> <tr> <td>START</td> <td>Operation indicates a new request of a crypto primitive, it shall cancel all previous requests perform necessary initializations and checks if the crypto primitive can be processed.</td> </tr> <tr> <td>UPDATE</td> <td>Operation indicates, that the crypto primitive expect input data. An update operation may provide intermediate results.</td> </tr> </table> | START   | Operation indicates a new request of a crypto primitive, it shall cancel all previous requests perform necessary initializations and checks if the crypto primitive can be processed. | UPDATE | Operation indicates, that the crypto primitive expect input data. An update operation may provide intermediate results. |
|                      | START  | Operation indicates a new request of a crypto primitive, it shall cancel all previous requests perform necessary initializations and checks if the crypto primitive can be processed. |   |        |   |
| UPDATE               | Operation indicates, that the crypto primitive expect input data. An update operation may provide intermediate results.  |   |   |        |   |
|                      |  |   |   |        |   |





| <b>Terms:</b> | <b>Description:</b>  |   |
|---------------|--|---|
|               | FINISH   | Operation indicates, that after this part all data are fed completely and the crypto primitive can finalize the calculations. A finish operation may provide final results. |
|               | It is also possible to perform more than one operation at once by concatenating the corresponding bits of the operation_mode argument.   |   |
| Priority      | The priority of a job defines the importance of it. The higher the priority (as well in value), the more immediate the job will be executed. The priority of a cryptographic job is part of the configuration.   |   |
| Processing    | Indicates the kind of job processing.  |   |
|               | Asynchronous   | The job is not processed immediately when calling a corresponding function. Usually, the caller is informed via a callback function when the job has been finished.         |
|               | Synchronous  | The job is processed immediately when calling a corresponding function. When the function returns, a result will be available.  |
| Service       | A service shall be understand as defined in the FO_TR_Glossary document: A service is a type of operation that has a published specification of interface and behavior, involving a contract between the provider of the capability and the potential clients. |   |

## 3 Related documentation

### 3.1 Input documents & related standards and norms

- [1] Requirements on Crypto Stack  
AUTOSAR\_CP\_RS\_CryptoStack
- [2] Glossary  
AUTOSAR\_FO\_TR\_Glossary
- [3] Specification of Crypto Interface  
AUTOSAR\_CP\_SWS\_CryptoInterface
- [4] Specification of Crypto Driver  
AUTOSAR\_CP\_SWS\_CryptoDriver
- [5] Specification of Default Error Tracer  
AUTOSAR\_CP\_SWS\_DefaultErrorTracer
- [6] General Specification of Basic Software Modules  
AUTOSAR\_CP\_SWS\_BSWGeneral
- [7] General Requirements on Basic Software Modules  
AUTOSAR\_CP\_RS\_BSWGeneral
- [8] IETF RFC 5639 – Elliptic Curve Cryptography (ECC) Brainpool Standard Curves and Curve Generation, 2010
- [9] IETF RFC 6637 – Elliptic Curve Cryptography (ECC) in OpenPGP, 2012

### 3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [6, SWS BSW General], which is also valid for Crypto Service Manager.

Thus, the specification SWS BSW General shall be considered as additional and required specification for Crypto Service Manager.

## 4 Constraints and assumptions

### 4.1 Limitations

Some type definitions of CSM start with the Prefix "CRYPTO\_" which will violate [SRS\_-BSW\_00305]. This will be harmonized in release 4.3.1. Nevertheless due to the constraint [constr\_1050] part 1 the ports are still consider to be compatible.

### 4.2 Applicability to car domains

n.a.

### 4.3 Security Implications

There is no user management in place, which prevents non-authorized access on any of CSM's services. This means, that if any access protection is needed such must be implemented by the application and the served (by CSM) cryptographic library modules; access protection is not target of the CSM.

## 5 Dependencies to other modules

### [SWS\_Csm\_00001]

*Upstream requirements:* [SRS\\_CryptoStack\\_00082](#)

[The CSM shall be able to access the cryptographic interface (CRYIF), which is implemented according to the cryptographic interface specification.]

### [SWS\_Csm\_00506]

*Upstream requirements:* [SRS\\_CryptoStack\\_00082](#)

[The CSM module shall use the interfaces of the CRYIF with the underlying Crypto Drivers (CRYPTO) to calculate the result of a cryptographic service.]

The incorporated cryptographic library modules or hardware extensions of the Crypto Driver provide the cryptographic routines, e.g. SHA-1, RSA, AES, Diffie-Hellman key-exchange, etc.

## 6 Requirements Tracing

The following tables reference the requirements specified in [7] and [1] and links to the fulfillment of these. Please note that if column “Satisfied by” is empty for a specific requirement this means that this requirement is not fulfilled by this document.

| Requirement             | Description   | Satisfied by  |
|-------------------------|---|---|
| [SRS_BSW_00101]         | The Basic Software Module shall be able to initialize variables and hardware in a separate initialization function              | [SWS_Csm_00646]   |
| [SRS_BSW_00358]         | The return type of init() functions implemented by AUTOSAR Basic Software Modules shall be void                                 | [SWS_Csm_00646]   |
| [SRS_BSW_00359]         | Callback Function Return Types for AUTOSAR BSW  | [SWS_Csm_00970] [SWS_Csm_00971]                                 |
| [SRS_BSW_00360]         | AUTOSAR Basic Software Modules callback functions are allowed to have parameters  | [SWS_Csm_00970] [SWS_Csm_00971]                                 |
| [SRS_BSW_00373]         | The main processing function of each AUTOSAR Basic Software Module shall be named according the defined convention              | [SWS_Csm_00479]   |
| [SRS_BSW_00407]         | Each BSW module shall provide a function to read out the version information of a dedicated module implementation               | [SWS_Csm_00705]   |
| [SRS_BSW_00414]         | Init functions shall have a pointer to a configuration structure as single parameter  | [SWS_Csm_00646]   |
| [SRS_BSW_00432]         | Modules should have separate main processing functions for read/receive and write/transmit data path                            | [SWS_Csm_00479]   |
| [SRS_BSW_00438]         | Configuration data shall be defined in a structure  | [SWS_Csm_01085]   |
| [SRS_CryptoStack_00008] | The Crypto Stack shall allow static configuration of keys used for cryptographic jobs   | [SWS_Csm_00951] [SWS_Csm_00953] [SWS_Csm_01012] [SWS_Csm_01092] |
| [SRS_CryptoStack_00009] | The Crypto Stack shall support reentrancy for all crypto services   | [SWS_Csm_00022]   |
| [SRS_CryptoStack_00010] | The Crypto Stack shall conceal symmetric keys from the users of crypto services   | [SWS_Csm_00959]   |
| [SRS_CryptoStack_00011] | The Crypto Stack shall conceal asymmetric private keys from the users of Crypto services  | [SWS_Csm_00959]   |
| [SRS_CryptoStack_00019] | The Crypto Stack shall identify random number generation as a cryptographic primitive which can be requested to a driver        | [SWS_Csm_01543]   |
| [SRS_CryptoStack_00020] | The Crypto Stack shall identify symmetric encryption/decryption as a cryptographic primitive which can be requested to a driver | [SWS_Csm_00984] [SWS_Csm_00989]                                 |







| Requirement                | Description   | Satisfied by  |
|----------------------------|---|---|
| [SRS_CryptoStack_ - 00021] | The Crypto Stack shall identify asymmetric encryption/decryption as a cryptographic primitive which can be requested to a driver                    | [SWS_Csm_00984] [SWS_Csm_00989]   |
| [SRS_CryptoStack_ - 00022] | The Crypto Stack shall identify MAC generation/verification as a cryptographic primitive which can be requested to a driver                         | [SWS_Csm_00982]   |
| [SRS_CryptoStack_ - 00023] | The Crypto Stack shall identify asymmetric signature generation/ verification as a cryptographic primitive which can be requested to a driver       | [SWS_Csm_00992] [SWS_Csm_00996]   |
| [SRS_CryptoStack_ - 00024] | The Crypto Stack shall identify hash calculation as a cryptographic primitive which can be requested to a driver                                    | [SWS_Csm_00980]   |
| [SRS_CryptoStack_ - 00026] | The Crypto Stack shall provide an interface for the generation of asymmetric keys   | [SWS_Csm_00955]   |
| [SRS_CryptoStack_ - 00027] | The Crypto Stack shall provide an interface for the generation of symmetric keys  | [SWS_Csm_00955]   |
| [SRS_CryptoStack_ - 00028] | The Crypto Stack shall provide an interface for key exchange mechanisms   | [SWS_Csm_00966] [SWS_Csm_00967]   |
| [SRS_CryptoStack_ - 00029] | The Crypto Stack shall provide an interface for key wrapping/extraction mechanisms  | [SWS_Csm_00959]   |
| [SRS_CryptoStack_ - 00082] | The CSM module specification shall specify the interface and behavior of the callback function, if the asynchronous job processing mode is selected | [SWS_Csm_00001] [SWS_Csm_00032] [SWS_Csm_00506]   |
| [SRS_CryptoStack_ - 00084] | The CSM module shall use the streaming approach for some selected services  | [SWS_Csm_01039]   |
| [SRS_CryptoStack_ - 00086] | The CSM module shall distinguish between error types  | [SWS_Csm_01089] [SWS_Csm_91004]   |
| [SRS_CryptoStack_ - 00087] | The CSM module shall report detected development errors to the Default Error Tracer   | [SWS_Csm_01088] [SWS_Csm_01091]   |
| [SRS_CryptoStack_ - 00090] | The CSM shall provide an interface to be accessible via the RTE   | [SWS_Csm_00802] [SWS_Csm_00803] [SWS_Csm_00902] [SWS_Csm_00903] [SWS_Csm_00912] [SWS_Csm_00922] [SWS_Csm_00923] [SWS_Csm_00927] [SWS_Csm_00928] [SWS_Csm_00930] [SWS_Csm_00934] [SWS_Csm_00935] [SWS_Csm_00936] [SWS_Csm_00943] [SWS_Csm_00946] [SWS_Csm_00947] [SWS_Csm_01042] [SWS_Csm_01074] [SWS_Csm_01075] [SWS_Csm_01077] [SWS_Csm_01078] [SWS_Csm_01079] [SWS_Csm_01083] [SWS_Csm_01905] [SWS_Csm_01906] [SWS_Csm_01910] [SWS_Csm_01915] [SWS_Csm_01920] [SWS_Csm_01921] [SWS_Csm_01922] [SWS_Csm_01923] [SWS_Csm_01924] [SWS_Csm_01925] [SWS_Csm_01926] |





| Requirement                | Description  | Satisfied by  |
|----------------------------|--|---|
|                            |  | △<br>[SWS_Csm_01927] [SWS_Csm_01928]<br>[SWS_Csm_09000] [SWS_Csm_91023]<br>[SWS_Csm_91045] [SWS_Csm_91046]<br>[SWS_Csm_91051] [SWS_Csm_91052]<br>[SWS_Csm_91053] [SWS_Csm_91054]<br>[SWS_Csm_91055] [SWS_Csm_91056]<br>[SWS_Csm_91057] [SWS_Csm_91058]<br>[SWS_Csm_91059] [SWS_Csm_91060]<br>[SWS_Csm_91062] [SWS_Csm_91105]<br>[SWS_Csm_91112] |
| [SRS_CryptoStack_ - 00091] | The CSM shall provide one Provide-Port for each configuration                    | [SWS_Csm_00934] [SWS_Csm_01042]<br>[SWS_Csm_91023] [SWS_Csm_91062]<br>[SWS_Csm_91112]   |
| [SRS_CryptoStack_ - 00095] | The Crypto Driver module shall strictly separate error and status information    | [SWS_Csm_91043] [SWS_Csm_91044]   |
| [SRS_CryptoStack_ - 00100] | Synchronous Job Processing   | [SWS_Csm_01049]   |
| [SRS_CryptoStack_ - 00101] | Asynchronous Job Processing  | [SWS_Csm_01049]   |
| [SRS_CryptoStack_ - 00103] | The Crypto Stack shall provide an interface for the derivation of symmetric keys | [SWS_Csm_00956]   |
| [SWS_BSW_00050]            | Check parameters passed to <i>Initialization functions</i>                       | [SWS_Csm_00186]   |

**Table 6.1: Requirements Tracing**

## 7 Functional specification

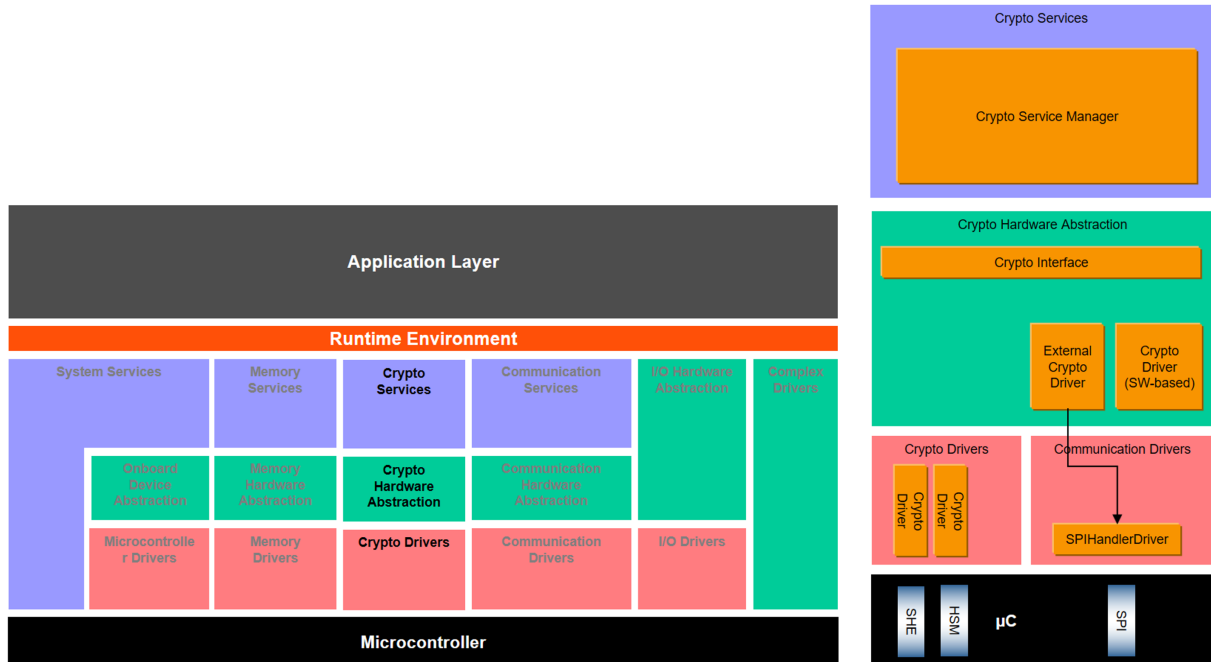


Figure 7.1: AUTOSAR Layered View with CSM

### 7.1 Basic Architecture Guidelines

The starting point for the description of the design of the CSM module is the AUTOSAR Layered Software Architecture (see Figure 7.1). The description of the CSM module architecture on the basis of the AUTOSAR layered software architecture shall help to understand the specification of interfaces and functionalities of the CSM module in the following sections.

The architecture of AUTOSAR consists of several layers which can be seen in Figure 7.1. The Service Layer is the highest layer of the Basic Software. Its task is to provide basic services for application and basic software modules, i.e. it offers the most relevant functionalities for application software and basic software modules.


CSM is a service that provides cryptography functionality, based on a crypto driver which relies on a software library or on a hardware module. Also, mixed setups with multiple crypto drivers are possible. The CSM accesses the different CryptoDrivers over the CRYIF.

The CSM, as a service layer, provides the interface for SW-C or BSW for cryptographic operations. The main task of the CSM is to schedule and prioritize services and to call the crypto interface (CryIf) for further operation. The CryIf schedules the requests to the crypto driver and its crypto driver object that was statically assigned to this service.

The CSM uses a static configuration of primitives (`CsmPrimitives`) to define a cryptographic operation. Such a primitive is then assigned to a job configuration (`CsmJob`) that determines further attributes like priority, asynchronous or synchronous execution and what key shall be used for the operation. It should be noted that the key is always located in the crypto driver itself and the CSM uses only a reference to it.

The separation of the keys and primitives allows to separate the API for the cryptographic operation and the key management. This allows to let an application concentrate on the required cryptographic operation like MAC calculation and verification whereas a key manager provides the keys during a configuration setup.


The API of the CSM can roughly be divided into two categories: a direct API (mainly for key management) and a job-based API (mainly for cryptographic operations) (see Figure 7.2)<sup>1</sup>. The Direct API is configured through key elements, whereas the job-based API is configured in the job configuration and its associated `CsmPrimitive`. Job-based API functions will ignore API parameters that have an equivalent in the `Crypto_JobType` job structure. The direct API has a direct correspondence of the functions in the Crylf and the Crypto Driver. These functions can only be called synchronously. The CSM will pass the parameters from the application directly to the corresponding Crylf function call. The job-based API uses a job structure, the `Crypto_JobType`, that contains static and dynamic parameters and references to structures to provide all necessary information to the crypto driver to perform that job (see Figure 7.3). Every service that uses a job will use this structure. All necessary parameter for a service will be packed into the elements of the structure by the CSM and will then call the Crylf and this, in turn, will call the configured Crypto Driver.

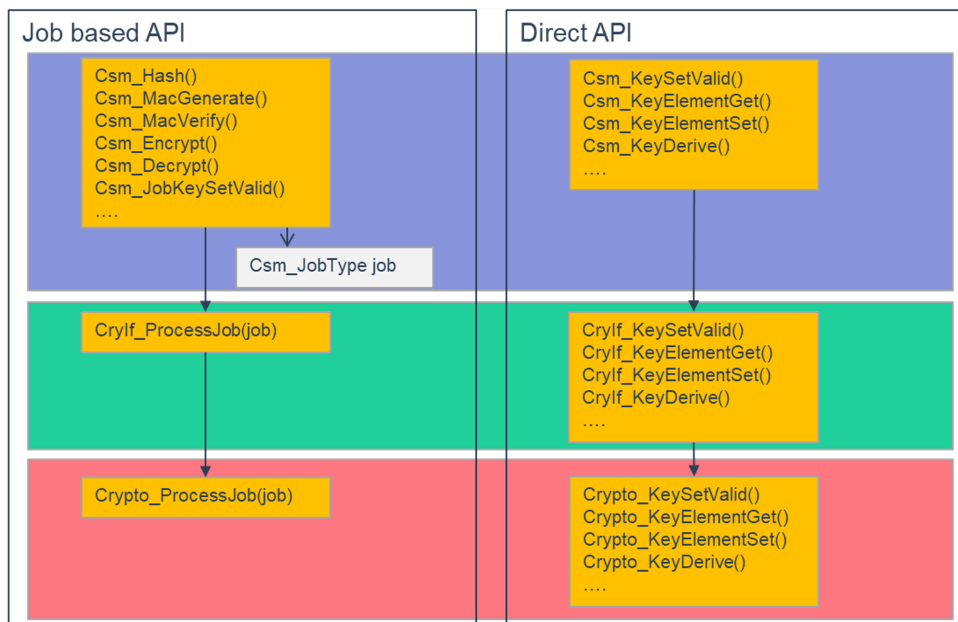

**Figure 7.2: API call tree for CSM, Crylf and Crypto. Divided into job-based API and Direct API**

<sup>1</sup>Historically, there are a few functions with direct synchronous API and a job based API, because the need for asynchronous execution was recognized afterwards.

A job can run synchronously or asynchronously depending on the static configuration. The parameters for crypto service info, crypto algorithm family and mode determine the exact cryptographic algorithm that shall be performed in the crypto driver.

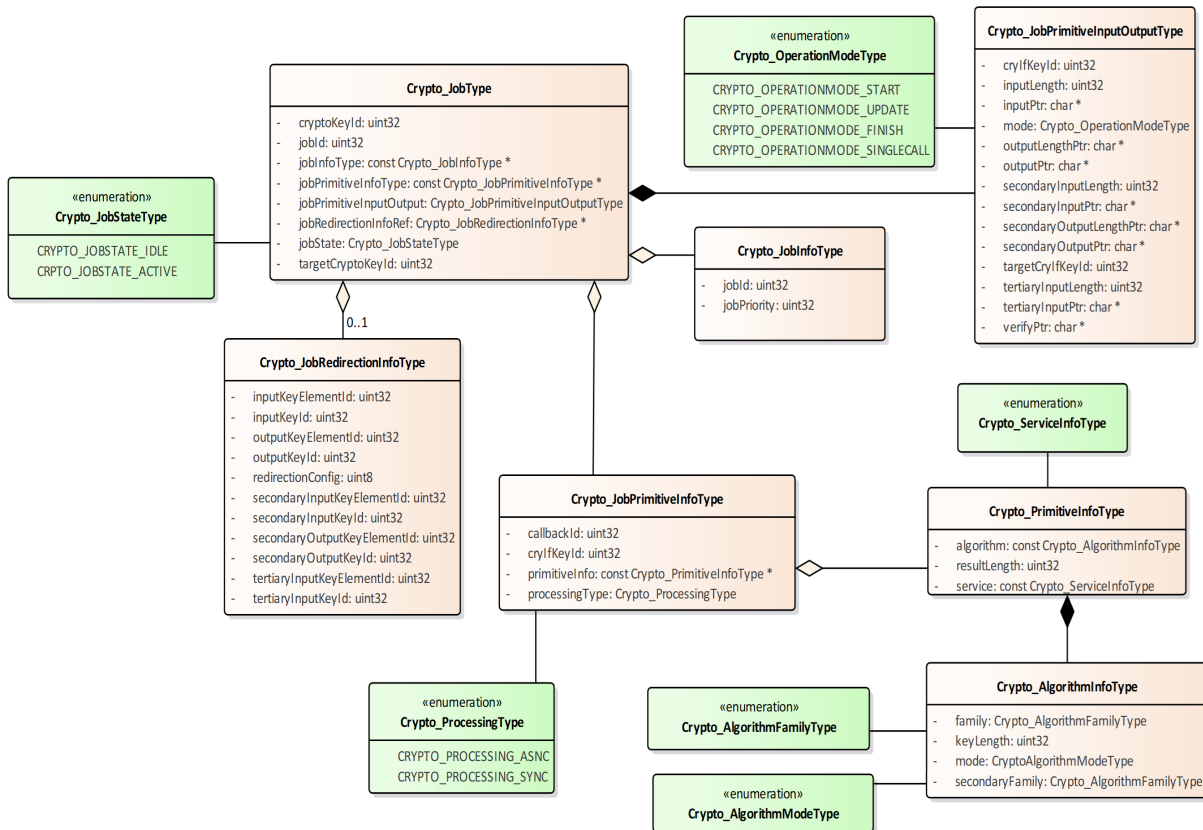

**Figure 7.3: Structure of `Crypto_JobType` (Job) and its dependencies**

[SWS\_Csm\_00942] [If any of the SWS items Csm[CsmPrimitives]AlgorithmFamily, Csm[CsmPrimitives]AlgorithmMode and/or Csm[CsmPrimitives]SecondaryAlgorithmFamily in the container Csm[CsmPrimitives]Config is set to CRYPTO\_ALGOFAM\_CUSTOM (0xFF) resp. CRYPTO\_ALGOMODE\_CUSTOM (0xFF), then the value of the reference to CryptoPrimitiveAlgorithmFamilyCustom/CryptoPrimitiveAlgorithmFamilyCustomId and/or CryptoPrimitiveAlgorithmModeCustom/CryptoPrimitiveAlgorithmModeCustomId defined in the Crypto Driver shall be set to either of the fields family, mode and/or secondaryFamily in Crypto\_AlgorithmInfoType (instead of the "CUSTOM" value 0xff itself).]

## 7.2 General Behavior

[SWS\_Csm\_00941] [A job is an instance of a configured cryptographic primitive.]

**[SWS\_Csm\_00016]** [For each job just one instance shall be processed by CSM at a time.]

**[SWS\_Csm\_00022]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00009](#)

[The CSM module shall allow parallel processing of different jobs.]

**[SWS\_Csm\_00017]** [If a service of the CSM module is requested and the corresponding job is in "ACTIVE" state, the job request shall call `CryIf_ProcessJob` and pass on the return value.]

**[SWS\_Csm\_00018]** [If a service of the CSM module is requested, and the CSM job needs to be queued and the queue is full, the job request shall be rejected with the return value `CRYPTO_E_BUSY`.]

**[SWS\_Csm\_00019]** [If an asynchronous interface is configured, the CSM module shall provide a main function `Csm_MainFunction` which is called cyclically to control processing of the jobs via a state machine.]

## 7.2.1 Normal Operation

**[SWS\_Csm\_01039]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00084](#)

[To unite a single call function and the streaming approach for the crypto services, there is the mode parameter, which determines the operation mode. This service operation is a flag field, indicating the operation mode "START", "UPDATE" or "FINISH". It declares explicitly what operation shall be performed. These operation modes can be mixed, and execute multiple operations at once.

The diagram in [SWS\_Crypto\_00018] (in [4]) shows the state machine of a job of this design.]

**Note:** The actual transaction of the states is made in the layer, which works with these states, i.e. in the Crypto Driver.

**[SWS\_Csm\_01033]** [The CSM crypto services shall support to process multiple operation mode inputs with a single call.]

**[SWS\_Csm\_01045]** [If the `CRYPTO_OPERATIONMODE_START` and `CRYPTO_OPERATIONMODE_FINISH` bits are set and the `CRYPTO_OPERATIONMODE_UPDATE` is not set, the `Csm_<Service>` function shall return with `E_NOT_OK`.]

**Note:** The coherent single call approach could improve the performance due to less overhead. Instead of calling the explicit API multiple times, only one call is necessary. This approach is intended to be used with small data input, which demand fast processing.

While operating with the streaming approach ("Start", "Update", "Finish") the dedicated Crypto Driver Object is waiting for further input ("Update") until the "Finish" state has been reached. No other job could be processed on this Crypto Driver instance meanwhile.

### 7.2.1.1 Configuration

**[SWS\_Csm\_91005]** [Each crypto primitive configuration shall be realized as a constant structure of type `Crypto_PrimitiveInfoType`.]

**[SWS\_Csm\_91006]** [Each job primitive configuration shall be realized as a constant structure of type `Crypto_JobPrimitiveInfoType`.]

**[SWS\_Csm\_00028]** [It shall be possible to create several configurations for each cryptographic primitive.]

**Note:** One configuration per job per primitive is possible.

**[SWS\_Csm\_00029]** [When creating a primitive configuration, it shall be possible to configure all available and allowed schemes from the underlying Crypto Driver Object.]

#### **[SWS\_Csm\_00032]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00082](#)

[If the asynchronous interface is chosen, each job primitive configuration shall contain a callback function.]

### 7.2.1.2 Synchronous Job Processing

**[SWS\_Csm\_00035]** [When the synchronous interface is used, the interface functions shall immediately compute the result with the help of the underlying Crypto Stack modules.]

**[SWS\_Csm\_00037]** [If a synchronous job is issued and the priority is greater than the highest priority available in the queue, the CSM shall disable processing new jobs from the queue until the next call of the main function has finished that follows after completion of the currently processed job.]

**Note:** Channels may hold jobs of both asynchronous and synchronous processing type. If so, a synchronous job might not be accepted for processing although its job's priority is higher than those of all asynchronous jobs.

**Note:** As the underlying Crypto Driver can have its own queue, it can not always be ensured that the highest priority job provided by the application is processed next.

**[SWS\_Csm\_91007]** [If a synchronous job is issued and the priority is less than the highest priority available in the queue, the CSM shall return `CRYPTO_E_BUSY`.]

**Note:** By pausing calls to the CSM main function with e.g. critical sections during calling the synchronous jobs, it can be ensured, that synchronous jobs can be processed in a row without having to wait for asynchronous jobs in between if they have a high enough priority. Also consider disabling queueing in the Crypto Driver Object to ensure fast processing of synchronous jobs.

If the loading of asynchronous jobs from the queue shall not be paused by synchronous jobs, the priorities of the synchronous jobs have to be smaller than the asynchronous jobs.

### 7.2.1.3 Asynchronous Job Processing

**[SWS\_Csm\_00036]** [If the asynchronous interface is used, the interface functions shall only hand over the necessary information to the underlying Crypto Stack modules.]

**[SWS\_Csm\_00039]** [The users of the CSM shall be notified when a requested cryptographic service has been processed by calling the callback function from the job primitive configuration.]



## 7.2.2 Design Notes

The CSM provides two services:

1. the crypto services itself and
2. key management.

### 7.2.2.1 CSM module startup

The `Csm_Init` request shall not be responsible to trigger the initialization of the underlying CRYIF. It is assumed, that the underlying CRYIF will be initialized by any appropriate entity (e.g. BswM).

Software components, which are using the CSM module, shall be responsible for checking global error and status information resulting from the CSM module startup.

### 7.2.2.2 Crypto Services

#### 7.2.2.2.1 Usage of the CSM crypto services

[SWS\_Csm\_00734] [CSM crypto services shall provide a `Csm_<Service>` API.]

[SWS\_Csm\_00924] [The application shall be able to call `Csm_<Service>` with the operation mode `CRYPTO_OPERATIONMODE_START` to initialize cryptographic computations.]

[SWS\_Csm\_00925] [The application shall be able to call `Csm_<Service>` with the operation mode `CRYPTO_OPERATIONMODE_UPDATE` arbitrary often, but at least one time, to feed the job's crypto primitive with input data.]

[SWS\_Csm\_01046] [The application shall be able to call `Csm_<Service>` with the operation mode `CRYPTO_OPERATIONMODE_FINISH` to finalize cryptographic computations.]

[SWS\_Csm\_01055] [Only the service operations HASH, MACGENERATE, MACVERIFY, ENCRYPT, DECRYPT, AEAD\_ENCRYPT, AEAD\_DECRYPT, SIGNATUREGENERATE, SIGNATUREVERIFY shall support the operation mode `START`, `UPDATE` and `FINISH` as specified from the API. For all other service operations, the CSM shall set the operation mode to `CRYPTO_OPERATIONMODE_SINGLECALL`, even if the API does not provide an operation mode.]

**Note:** The `Csm_<Service>` will call the `CryIf_ProcessJob` with a pointer to `Crypto_JobType`, where all the necessary information are stored to process the job.

Part of this `Crypto_JobType` is a `Crypto_JobPrimitiveInputOutputType`, where all the information about the input and output parameters depending of the service are stored. A definition of the mapping from the API parameters of `Csm_<Service>` to the parameters of `Crypto_JobPrimitiveInputOutputType`, can be found in [SWS\_Crypto\_00073] of the Crypto Driver specification.

**[SWS\_Csm\_01093]** [If the CSM issues either the service `CRYPTO_MACGENERATE`, `CRYPTO_MACVERIFY`, `CRYPTO_ENCRYPT`, `CRYPTO_DECRYPT`, `CRYPTO_AEADENCRYPT`, `CRYPTO_AEADDECRYPT`, `CRYPTO_RANDOMGENERATE`, `CRYPTO_SIGNATUREGENERATE` or `CRYPTO_SIGNATUREVERIFY` to the Crypto Interface, it needs to make sure that the element `jobPrimitiveInfo->cryIfKeyId` in the job structure of `Crypto_JobType` references to the assigned key of this job.]

**Note:** The `CryIf` is responsible to transform this ID to the corresponding key ID of the respective crypto driver.

**[SWS\_Csm\_01094]** [If one of the primitive services `CRYPTO_KEYSETVALID`, `CRYPTO_KEYSETINVALID`, `CRYPTO_RANDOMSEED`, `CRYPTO_KEYGENERATE`, `CRYPTO_KEYDERIVE`, `CRYPTO_KEYEXCHANGEALCPUBVAL`, `CRYPTO_KEYEXCHANGEALCSECRET` or `CRYPTO_CUSTOM_SERVICE` are to be executed, the CSM shall fill in the elements of the structure `Crypto_JobType->jobPrimitiveInputOutput->cryIfKeyId` and, if applicable, `Crypto_JobType->jobPrimitiveInputOutput->targetCryIfKeyId` with the corresponding `CryIf` key ID.]

**Note:** The `CryIf` is responsible to transform these IDs to the corresponding key IDs of the respective crypto driver.


#### 7.2.2.2.2 Queuing

The CSM may have several queues, where the jobs are lining up depending on their priority, to process multiple cryptographic requests. The path from a CSM queue via the `CryIf` to a Crypto Driver Object is called a *channel*. Each queue of the CSM is mapped to one channel to access the crypto primitives of the Crypto Driver Object. The size of the queue is configurable.

To optimize the hardware usage of the Crypto Driver Object, there is optionally a queue in Crypto Driver, too.

A Crypto Driver Object represents an instance of an independent crypto "device" (hardware or software, e.g. AES accelerator). There could be a channel for fast AES and CMAC calculations on an HSM for jobs with high priority, which ends on a native AES calculation service in the Crypto Driver. But it is also possible, that a Crypto Driver Ob-

ject is a piece of software, e.g. for RSA calculations where users are able to encrypt, decrypt, sign or verify data.

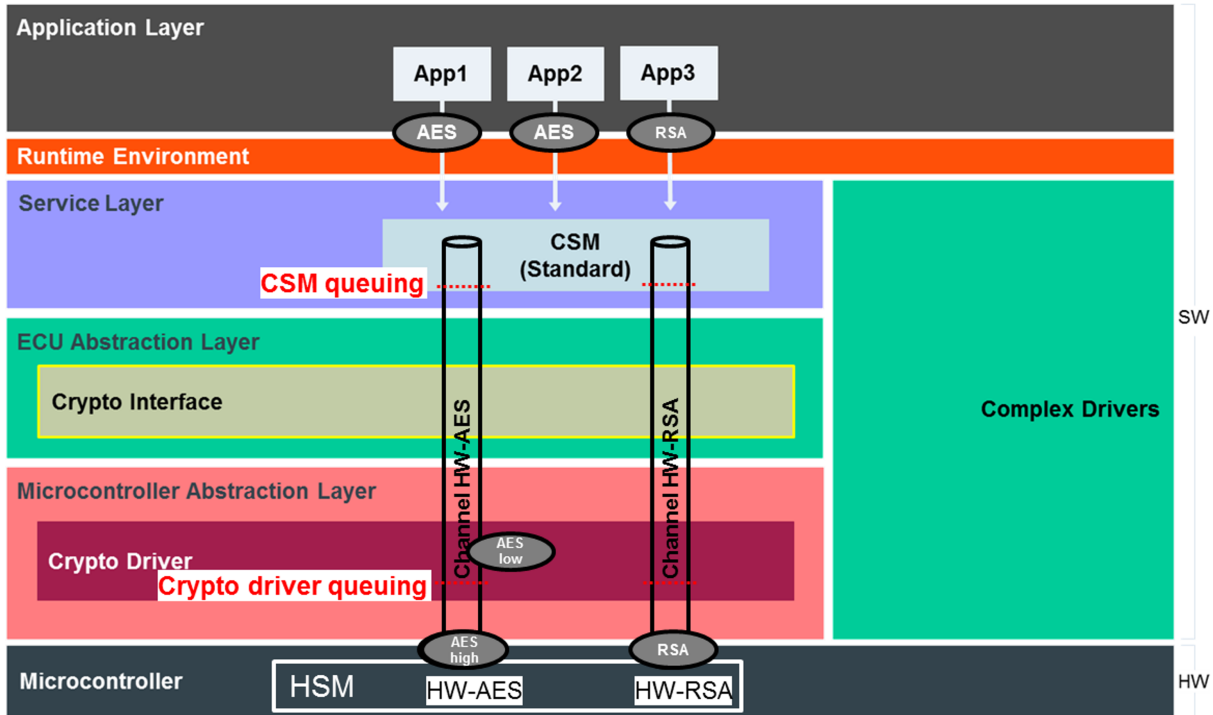

**Figure 7.4: AUTOSAR Layered View with channels**

Figure 7.4 illustrates an AUTOSAR Layered View with channels. In this example, there is a HSM with two Crypto Driver Objects (HW-AES and HW-RSA), each of them has an own channel. Each channel is connected to a CSM queue and a Crypto Driver Object queue.

In this case, both Crypto Driver Objects are processing a crypto job (AES-high and RSA) each, while the queue of the Crypto Driver Object contains one more job (AES-low). If the HW-AES of the HSM finished the AES-high job, AES-low job will be processed as next one.

Other scenarios with the same setup (without jobs in process or in queues) can be derived as follows: It will be assumed, that a new job of an application calls RSA.

- If the Crypto Driver Object of the RSA is not busy, the job will be processed immediately.
- If the Crypto Driver Object of the RSA is busy, but the queue of the Crypto Driver Object is not full, the job will be listed into that queue in order of its priority. As soon as the Crypto Driver Object is free, the job with the highest priority from the Crypto Driver Object queue will be executed.
- If the Crypto Driver Object of the RSA is busy and the queue of the Crypto Driver Object is full, the job will be stored in the CSM queue in order of its priority.

- If the Crypto Driver Object of the RSA is busy and the queue of the Crypto Driver Object as well as the CSM queue are full, the CSM rejects the request.
- If the Crypto Driver Object of the RSA is active, the job is already started in the Crypto Driver and is waiting for either more data to process or the finish command.

**[SWS\_Csm\_00940]** [It shall be possible to queue CSM jobs in configured [CsmQueues](#) in the CSM.]

**[SWS\_Csm\_00944]** [The [CsmQueues](#) shall sort the jobs according to the configured job's priority.]


**Note:** The higher the job priority value, the higher the job's priority.

**[SWS\_Csm\_91072]** [A service operation shall only be added to the queue if the data consistency of the job structure can be guaranteed. This shall be particularly considered when services with the same jobID are added to the queue (e.g. with subsequent calls to [Csm\\_SignatureVerify](#) and [Csm\\_SaveContextJob](#)). If this cannot be guaranteed, the service operation shall return with [CRYPTO\\_E\\_BUSY](#).]

**[SWS\_Csm\_91073]** [If services with the same JobID can be added to the queue, then the order of execution of these services shall correspond to the order of incoming services operation requests ("First-In-First-Out").]

**[SWS\_Csm\_91074]** [The `Csm_<Service>` function shall behave as shown in diagram [\[SWS\\_Csm\\_01041\]](#).]

**[SWS\_Csm\_01041]** [The `Csm_<Service>` function behavior.]

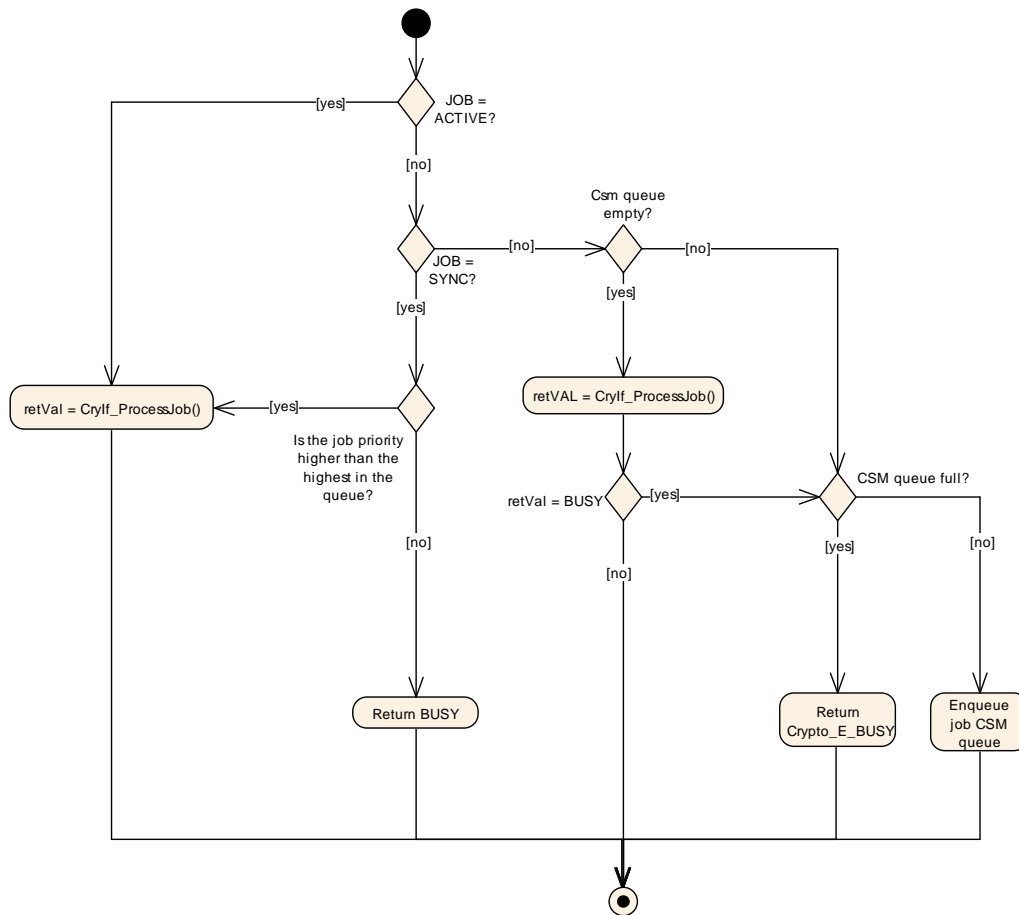

**Figure 7.5: Csm\_<Service> Function Behavior**

Synchronous job processing and queuing might not be useful. So, if synchronous job processing is chosen, the queue sizes should be "0". However, it is also possible to use channels (including queues) with synchronous and asynchronous jobs.

The queued jobs can be passed to the CRYIF in the [Csm\\_MainFunction](#).

If the job has the state "active" the CSM shall assume, that the mapped cryptographic driver instance is currently processing this job and the caller wants to continue with the operation (e.g. feeding more data using "update"). The plausibility check has to be performed in the cryptographic driver instance.

### 7.2.2.3 Key Management

**[SWS\_Csm\_00950]** [Services belonging to the key management shall provide the Csm\_<Service> function, only.]

**[SWS\_Csm\_00954]** [A key consists of one or more key elements.]

Examples of key elements are the key material itself, an initialization vector, a seed for random number generation, or the proof of the SHE standard.

Keys, i.e. the corresponding key IDs have symbolic names given by the configuration. The Crypto Stack API uses the following key element index definition from the CSM module:

[SWS\_Csm\_01022] [

| Crypto Service:       | Key element:                      | Key element Name:                  | Key element ID: |
|-----------------------|-----------------------------------|------------------------------------|-----------------|
| MAC                   | Key Material                      | CRYPTO_KE_MAC_KEY                  | 1               |
|                       | Proof (SHE)                       | CRYPTO_KE_MAC_PROOF                | 2               |
|                       | Seed                              | CRYPTO_KE_KEYGENERATE_SEED         | 16              |
| Signature             | Key Material                      | CRYPTO_KE_SIGNATURE_KEY            | 1               |
|                       | ECC curve type                    | CRYPTO_KE_SIGNATURE_CURVETYPE      | 29              |
| Random                | Seed State                        | CRYPTO_KE_RANDOM_SEED_STATE        | 3               |
|                       | Algorithm                         | CRYPTO_KE_RANDOM_ALGORITHM         | 4               |
| Cipher/AEAD           | Key Material                      | CRYPTO_KE_CIPHER_KEY               | 1               |
|                       | Proof (SHE)                       | CRYPTO_KE_CIPHER_PROOF             | 2               |
|                       | Init Vector                       | CRYPTO_KE_CIPHER_IV                | 5               |
|                       | 2 <sup>nd</sup> Key Material      | CRYPTO_KE_CIPHER_2NDKEY            | 7               |
| Key Exchange          | Base                              | CRYPTO_KE_KEYEXCHANGE_BASE         | 8               |
|                       | Private Key                       | CRYPTO_KE_KEYEXCHANGE_PRIVKEY      | 9               |
|                       | Own Public Key                    | CRYPTO_KE_KEYEXCHANGE_OWNPUBKEY    | 10              |
|                       | Shared Value                      | CRYPTO_KE_KEYEXCHANGE_SHAREDVALUE  | 1               |
|                       | Algorithm                         | CRYPTO_KE_KEYEXCHANGE_ALGORITHM    | 12              |
|                       | ECC curve type                    | CRYPTO_KE_KEYEXCHANGE_CURVETYPE    | 29              |
| Key Derivation        | Password                          | CRYPTO_KE_KEYDERIVATION_PASSWORD   | 1               |
|                       | Salt                              | CRYPTO_KE_KEYDERIVATION_SALT       | 13              |
|                       | Iterations                        | CRYPTO_KE_KEYDERIVATION_ITERATIONS | 14              |
|                       | Algorithm                         | CRYPTO_KE_KEYDERIVATION_ALGORITHM  | 15              |
|                       | ECC curve type                    | CRYPTO_KE_KEYDERIVATION_CURVETYPE  | 29              |
| Key Generate          | Key Material                      | CRYPTO_KE_KEYGENERATE_KEY          | 1               |
|                       | Seed                              | CRYPTO_KE_KEYGENERATE_SEED         | 16              |
|                       | Algorithm                         | CRYPTO_KE_KEYGENERATE_ALGORITHM    | 17              |
|                       | ECC curve type                    | CRYPTO_KE_KEYGENERATE_CURVETYPE    | 29              |
| Key Wrap / Key Unwrap | Key to be wrapped / Unwrapped key | CRYPTO_KE_KEYWRAP_KEY              | 1               |
|                       | Header Information                | CRYPTO_KE_KEYWRAP_HEADER           | 2               |

]

The key elements indices of [SWS\_Csm\_01022] can be extended by the vendor.

**[SWS\_Csm\_00951]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00008](#)

[For each key element that contains cryptographic key material, the format of the provided key shall be specified in the configuration used for data exchange, e.g. for [Csm\\_KeyElementGet](#) or [Csm\\_KeyElementSet](#). The key formats supported by a specific crypto driver are part of the pre-configuration information that comes along with the crypto driver.]

**[SWS\_Csm\_00953]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00008](#)

[The following key formats are available:

See [\[SWS\\_Csm\\_01096\]](#).

A binary Octet is the integer representation in base 256. A large value can be splitted into his factors:

$$x = x_{xLen-1} * 256^{xLen-1} + x_{xLen-2} * 256^{xLen-2} + \dots + x_1 * 256 + x_0 \text{ where } 0 \leq x_i < 256$$

Let the Octet Xi have the integer value  $x_{xLen-i}$  for  $1 \leq i \leq xLen$ . The octet is then  $X = X_1X_2..X_{xLen}$

Rationale: An asymmetric key can either be provided with or without identification. The identification is used to uniquely identify the key itself that is provided, so that the key parser can check if the key material is appropriate or not. Without identification, the key material must correspond to the format that is specified for this key. Following IETF standards, the identification of a key is provided as an object identifier (OID) as part of the ASN.1 description.]

**[SWS\_Csm\_01096] Available key formats [**

|   |   |
|---|---|
| CRYPTO_KE_FORMAT_BIN_OCTET                  | Key provided as octet value in binary form <sup>1</sup> .   |
| CRYPTO_KE_FORMAT_BIN_SHEKEYS                | Combined input/output keys for SHE operation (M1+M2+M3) and (M4+M5).  |
| CRYPTO_KE_FORMAT_BIN_IDENT_PRIVATEKEY_PKCS8 | Private key material in ASN.1 coded form (BER coding) with identification. The data is provided in binary form, not, e.g. as a BASE64 string. |
| CRYPTO_KE_FORMAT_BIN_IDENT_PUBLICKEY        | Public key material in ASN.1 coded form (BER coding) with identification. The data is provided in binary form, not, e.g. as a BASE64 string.  |
| CRYPTO_KE_FORMAT_BIN_RSA_PRIVATEKEY         | Private key material in ASN.1 coded form (BER coding). The key material is provided in binary form, not, e.g. as a BASE64 string.             |
| CRYPTO_KE_FORMAT_BIN_RSA_PUBLICKEY          | Public key material in ASN.1 coded form (BER coding). The key material is provided in binary form, not, e.g. as a BASE64 string.              |

]

**[SWS\_Csm\_00952]** [Vendor specific keyElementIds should start 1000 to avoid interferences with future extended versions of the Crypto Stack.]

**Note:** The key elements `CRYPTO_KE_[... ]_ALGORITHM` are used to configure the behavior of the key management functions, because they are independent of jobs and therefore can not be configured like a primitive.

### [SWS\_Csm\_01092]

*Upstream requirements:* [SRS\\_CryptoStack\\_00008](#)

[If a cryptographic primitive uses elliptic curve algorithm but the concrete curve parameter cannot sufficiently specified by its algorithm families and its algorithm mode, an additional key element of type `CRYPTO_KE_XXXXX_CURVETYPE` shall be used to provide the required information. This information is set at runtime through the key element interface. The data of the key element shall be set with its object identifier follows the format defined in [8] and [9].]

```

1  const uint8 * EccKey = { 0x12, 0x23, 0x34, ... };
2  // The required key value.
3  // According to RFC5639:
4  // {iso(1) identified-organization(3) teletrust(36) algorithm(3)
signatureAlgorithm(3) ecSign(2) ecStdCurvesAndGeneration(8)
ellipticCurve(1)}
5  brainpoolP160r1(1)
6
7  const uint8 * EccType = { 1, 3, 36, 3, 3, 2, 8, 1, 1 };
8  //OID definition of ECC Brainpool 160 P1
9
10 Csm_KeyElementSet(MyEccKeyId, CRYPTO_KE_SIGNATURE_KEY, EccKey, sizeof(
EccKey));
11 Csm_KeyElementSet(MyEccKeyId, CRYPTO_KE_SIGNATURE_CURVETYPE, EccType,
sizeof(EccType));
12 Csm_KeySetValid(MyEccKeyId);

```

**Listing 7.1: Definition for an ECC Brainpool 160 P1 key used for signature generation.**

#### 7.2.2.4 Redirection of Input and/or Output of Crypto Jobs

**[SWS\_Csm\_91013]** [The input and/or output data of a job can be re-directed to a key element. Which input and output value to which key and its key element is re-directed shall be statically configured at compile time and shall not be changed at runtime.]

**[SWS\_Csm\_91014]** [If an input or output value of a job is re-directed to a key element ([CsmInOutRedirectionRef](#) [[ECUC\\_Csm\\_00262](#)] is existing) and the corresponding input or output length value is not set to 0, the job shall not be processed and `E_NOT_OK` shall be returned.]



**[SWS\_Csm\_91015]** [If input or output redirection is not used for a job (no `CsmInOutRedirectionRef` [ECUC\_Csm\_00262] is existing), `jobRedirectionInfoRef` shall be set to `NULL_PTR`. If redirection is used (`CsmInOutRedirectionRef` [ECUC\_Csm\_00262] is existing) the `jobRedirectionInfoRef` shall point to a structure of `Crypto_JobRedirectionInfoType`.]

**[SWS\_Csm\_91016]** [The structure `Crypto_JobRedirectionInfoType` contains information which key elements shall be used for redirection. A bit field called `redirectionConfig` is provided that indicates which input and/or output value is redirected.

The value of `redirectionConfig` is a bit coded value that is used to indicate, which of the input and output buffers are redirected. If the least significant bit (Bit #0 or 0x01) of `redirectionConfig` is set the primary input key and its element is redirected and the value of `inputKeyId` and `inputKeyElementId` must indicate the element that is used for input buffer instead of the `inputPtr` and its length. If Bit #1 is set, the `secondaryInputBuffer` is redirected to the secondary input key is set and the key and key elements must be set, and Bit #2 is used for the tertiary input key. Bit #3 is reserved for future use.

If Bit #4 is set the `outputPtr` is redirected to the output key element of the output key. Bit #5 indicates the redirection of the secondary output buffer to the secondary key and its key element. If a bit is set to 0 the input or output shall not be redirected to the associated Key Element.

Example: A value of `redirectionConfig` of "00110001" indicates that the input should be gathered from the inputKeyElement of `inputKeyId` and that the output buffer and secondary output buffer shall be redirected to the outputKeyElement of `outputKeyId` and secondaryOutputKeyElement of `secondaryOutputKeyId`.]

#### 7.2.2.5 Job context interface

The job context interface allows to save or restore the context data of the workspace for a specific crypto service from the crypto driver. This allows to store all dynamically created data within a crypto driver so that it can later be restored to continue this operation at the exact point where the context snapshot was taken.

Key element data are not affected. This means, that key elements are not part of the context data and must be set or read by the key element interface separately if necessary.

**[SWS\_Csm\_91069]** [In addition to the standard error detection, on a call to `Csm_SaveContextJob` or `Csm_RestoreContextJob` the CSM shall check if the related job is currently active. If so, the operation shall continue as specified. Otherwise (the

job is in `CRYPTO_JOBSTATE_IDLE` state), the function shall immediately return with `E_NOT_OK`.]

**[SWS\_Csm\_91070]** [On a call to `Csm_SaveContextJob` or `Csm_RestoreContextJob` the CSM shall check if the related job is currently actively processing data, means the CSM has scheduled an operation related to this job to the driver and is waiting for a response. In this case, the function shall immediately return with `E_NOT_OK`.]

**[SWS\_Csm\_91071]** [On a call to `Csm_RestoreContextJob()` or `Csm_SaveContextJob` the CSM shall check if the job references to either of the CsmPrimitive `CsmHash`, `CsmEncrypt`, `CsmAEADEncrypt`, `CsmAEADDecrypt`, `CsmDecrypt`, `CsmMacGenerate`, `CsmMacVerify`, `CsmSignatureGenerate` or `CsmSignatureVerify`. If so, the operation shall continue as specified. Otherwise, the operation shall not be performed and `CSM_E_SERVICE_TYPE` shall be reported to the DET when `CsmDevErrorDetect` is true.]

## 7.3 Error Classification

Section "Error Handling" of the document [6] "General Specification of Basic Software Modules" describes the error handling of the Basic Software in detail. Above all, it constitutes a classification scheme consisting of five error types which may occur in BSW modules.

Based on this foundation, the following section specifies particular errors arranged in the respective subsections below.

### 7.3.1 Development Errors

#### **[SWS\_Csm\_91004] Definiton of development errors in module Csm**

*Upstream requirements:* [SRS\\_CryptoStack\\_00086](#)

[

| Type of error   | Related error code    | Error value |
|---|-----------------------|-------------|
| API request called with invalid parameter (Nullpointer) | CSM_E_PARAM_POINTER   | 0x01        |
| Csm Configuration ID out of range                       | CSM_E_PARAM_HANDLE    | 0x04        |
| API request called before initialization of CSM module  | CSM_E_UNINIT          | 0x05        |
| Initialization of CSM module failed                     | CSM_E_INIT_FAILED     | 0x07        |
| API request called with invalid processing mode         | CSM_E_PROCESSING_MODE | 0x08        |

▽

△

| Type of error   | Related error code | Error value |
|---|--------------------|-------------|
| Mismatch between the called API request and the service type of the job | CSM_E_SERVICE_TYPE | 0x09        |

]

### 7.3.2 Runtime Errors

#### [SWS\_Csm\_01089] Definiton of runtime errors in module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00086](#)

[

| Type of error | Related error code | Error value |
|---------------|--------------------|-------------|
| Queue overrun | CSM_E_QUEUE_FULL   | 0x01        |

]

### 7.3.3 Production Errors

There are no production errors.

### 7.3.4 Extended Production Errors

There are no extended production errors.

## 7.4 Error Detection

[SWS\_Csm\_91008] [While the CSM is not initialized and any function of the CSM API is called, except of [Csm\\_Init](#) and [Csm\\_GetVersionInfo](#), the operation shall not be performed and [CSM\\_E\\_UNINIT](#) shall be reported to the DET when [CsmDevErrorDetect](#) is true.]

[SWS\_Csm\_91009] [If a pointer to null is passed to an API function and the corresponding input or output data are not re-directed to a key element, the operation shall not be performed and [CSM\\_E\\_PARAM\\_POINTER](#) shall be reported to the DET when [CsmDevErrorDetect](#) is true.]

**[SWS\_Csm\_91011]** [If a CSM API with a ID handle in its interface is called and the ID handle is out of range, the operation shall not be performed and `CSM_E_PARAM_HANDLE` shall be reported to the DET when `CsmDevErrorDetect` is true.]

### **[SWS\_Csm\_01091]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00087](#)

[If a CSM API with a job handle (called `jobId`) in its interface is called and the `Crypto_ServiceInfoType` of the job does not match the requested service, the operation shall not be performed and `CSM_E_SERVICE_TYPE` shall be reported to the DET when `CsmDevErrorDetect` is true.]

### **[SWS\_Csm\_01088]**

*Upstream requirements:* [SRS\\_CryptoStack\\_00087](#)

[If a CSM job needs to be queued and the queue is full, the runtime error `CSM_E_QUEUE_FULL` shall be reported to the DET.]

**Note:** The indication of a queue overrun is logged as runtime error.

## **7.5 Multicore**

In case the Crypto-Stack is distributed across several partitions, Csm shall allow calls of its <service> APIs in different partitions.

**[SWS\_Csm\_91065]** [`CsmQueues` shall be handled within the `MainFunction`, which is referenced via `CsmQueueMainFunctionRef`.]

**Note:** In case the a `CsmJob` is not processed inside `MainFunction` context at all (Synchronous interfacing), the `MainFunction` assignment (via the respective `CsmQueue`) defines the partition, where the `CsmJob` is assigned to.

**[SWS\_Csm\_91066]** [The Csm module shall apply appropriate mechanisms to allow calls of `Csm_<Service>` API from partitions its `CsmJobs` are assigned to.]

## **7.6 Security Events**

The module does not report security events.

## 8 API specification

### 8.1 Imported types

In this chapter all types included from the following files are listed.

#### [SWS\_Csm\_00068] Definition of imported datatypes of module Csm [

| Module | Header File | Imported Type       |
|--------|-------------|---------------------|
| Std    | Std_Types.h | Std_ReturnType      |
|        | Std_Types.h | Std_VersionInfoType |

]

### 8.2 Type definitions

#### [SWS\_Csm\_91043] Definition of Std\_ReturnType-extension for module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00095](#)

[

| Range | Enum Value                 | Hex Value | Description  |
|-------|----------------------------|-----------|--|
|       | CRYPTO_E_BUSY              | 0x02      | The service request failed because the service is still busy                               |
|       | CRYPTO_E_ENTROPY_EXHAUSTED | 0x04      | The service request failed because the entropy of the random number generator is exhausted |
|       | CRYPTO_E_KEY_READ_FAIL     | 0x06      | The service request failed because read access was denied                                  |
|       | CRYPTO_E_KEY_WRITE_FAIL    | 0x07      | The service request failed because the writing access failed                               |
|       | CRYPTO_E_KEY_NOT_AVAILABLE | 0x08      | The service request failed because at least one required key element is not available.     |
|       | CRYPTO_E_KEY_NOT_VALID     | 0x09      | The service request failed because the key is invalid.                                     |
|       | CRYPTO_E_KEY_SIZE_MISMATCH | 0x0A      | The service request failed because the key size does not match.                            |
|       | CRYPTO_E_JOB_CANCELED      | 0x0C      | The service request failed because the Job has been canceled.                              |
|       | CRYPTO_E_KEY_EMPTY         | 0x0D      | The service request failed because of uninitialized source key element.                    |
|       | CRYPTO_E_CUSTOM_ERROR      | 0x0E      | Custom processing failed.  |





|                      |                       |
|----------------------|-----------------------|
| <b>Description</b>   | –                     |
| <b>Available via</b> | Crypto_GeneralTypes.h |

]

### [SWS\_Csm\_01085] Definition of datatype Csm\_ConfigType

 Upstream requirements: [SRS\\_BSW\\_00438](#)

[

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Name</b>          | Csm_ConfigType                             |   |  |
| <b>Kind</b>          | Structure                                  |   |  |
| <b>Elements</b>      | implementation specific                    |   |  |
|                      | <b>Type</b>                                | –   |  |
|                      | <b>Comment</b>                             | The content of the configuration data structure is implementation specific. |  |
| <b>Description</b>   | Configuration data structure of Csm module |   |  |
| <b>Available via</b> | Csm.h                                      |   |  |

]

### [SWS\_Csm\_01047] Definition of datatype Crypto\_AlgorithmFamilyType [

|              |                             |      |                             |
|--------------|-----------------------------|------|-----------------------------|
| <b>Name</b>  | Crypto_AlgorithmFamilyType  |      |                             |
| <b>Kind</b>  | Enumeration                 |      |                             |
| <b>Range</b> | CRYPTO_ALGOFAM_NOT_SET      | 0x00 | Algorithm family is not set |
|              | CRYPTO_ALGOFAM_SHA1         | 0x01 | SHA1 hash                   |
|              | CRYPTO_ALGOFAM_SHA2_224     | 0x02 | SHA2-224 hash               |
|              | CRYPTO_ALGOFAM_SHA2_256     | 0x03 | SHA2-256 hash               |
|              | CRYPTO_ALGOFAM_SHA2_384     | 0x04 | SHA2-384 hash               |
|              | CRYPTO_ALGOFAM_SHA2_512     | 0x05 | SHA2-512 hash               |
|              | CRYPTO_ALGOFAM_SHA2_512_224 | 0x06 | SHA2-512/224 hash           |
|              | CRYPTO_ALGOFAM_SHA2_512_256 | 0x07 | SHA2-512/256 hash           |
|              | CRYPTO_ALGOFAM_SHA3_224     | 0x08 | SHA3-224 hash               |
|              | CRYPTO_ALGOFAM_SHA3_256     | 0x09 | SHA3-256 hash               |
|              | CRYPTO_ALGOFAM_SHA3_384     | 0x0a | SHA3-384 hash               |
|              | CRYPTO_ALGOFAM_SHA3_512     | 0x0b | SHA3-512 hash               |





|                                     |      |  |
|-------------------------------------|------|--|
| CRYPTO_ALGOFAM_SHAKE128             | 0x0c | SHAKE128 hash  |
| CRYPTO_ALGOFAM_SHAKE256             | 0x0d | SHAKE256 hash  |
| CRYPTO_ALGOFAM_RIPEMD160            | 0x0e | RIPEMD hash  |
| CRYPTO_ALGOFAM_BLAKE_1_256          | 0x0f | BLAKE-1-256 hash   |
| CRYPTO_ALGOFAM_BLAKE_1_512          | 0x10 | BLAKE-1-512 hash   |
| CRYPTO_ALGOFAM_BLAKE_2s_256         | 0x11 | BLAKE-2s-256 hash  |
| CRYPTO_ALGOFAM_BLAKE_2s_512         | 0x12 | BLAKE-2s-512 hash  |
| CRYPTO_ALGOFAM_3DES                 | 0x13 | 3DES cipher  |
| CRYPTO_ALGOFAM_AES                  | 0x14 | AES cipher   |
| CRYPTO_ALGOFAM_CHACHA               | 0x15 | ChaCha cipher  |
| CRYPTO_ALGOFAM_RSA                  | 0x16 | RSA cipher   |
| CRYPTO_ALGOFAM_ED25519              | 0x17 | ED25519 elliptic curve   |
| CRYPTO_ALGOFAM_BRAINPOOL            | 0x18 | Brainpool elliptic curve   |
| CRYPTO_ALGOFAM_ECCNIST              | 0x19 | NIST ECC elliptic curves   |
| CRYPTO_ALGOFAM_RNG                  | 0x1b | Random Number Generator  |
| CRYPTO_ALGOFAM_SIPHASH              | 0x1c | SipHash  |
| CRYPTO_ALGOFAM_ECCANSI              | 0x1e | Elliptic curve according to ANSI X9.62   |
| CRYPTO_ALGOFAM_ECCSEC               | 0x1f | Elliptic curve according to SECG   |
| CRYPTO_ALGOFAM_DRBG                 | 0x20 | Random number generator according to NIST SP800-90A  |
| CRYPTO_ALGOFAM_FIPS186              | 0x21 | Random number generator according to FIPS 186.   |
| CRYPTO_ALGOFAM_PADDING_PKCS7        | 0x22 | Cipher padding according to PKCS.7   |
| CRYPTO_ALGOFAM_PADDING_ONEWITHZEROS | 0x23 | Cipher padding mode. Fill/verify data with 0, but first bit after the data is 1. Eg. "DATA" & 0x80 & 0x00... |
| CRYPTO_ALGOFAM_PBKDF2               | 0x24 | Password-Based Key Derivation Function 2   |
| CRYPTO_ALGOFAM_KDFX963              | 0x25 | ANSI X9.63 Public Key Cryptography   |
| CRYPTO_ALGOFAM_DH                   | 0x26 | Diffie-Hellman   |
| CRYPTO_ALGOFAM_SM2                  | 0x27 | SM2 elliptic curve algorithm   |
| CRYPTO_ALGOFAM_EEA3                 | 0x28 | Stream cipher based on [x01]   |
| CRYPTO_ALGOFAM_SM3                  | 0x29 | Chinese hash algorithm based on [x02]  |
| CRYPTO_ALGOFAM_EIA3                 | 0x2A | Authentication algorithm [x01]   |
| CRYPTO_ALGOFAM_HKDF                 | 0x2B | HMAC-based extract-and-expand key derivation function  |
| CRYPTO_ALGOFAM_ECDSA                | 0x2C | Elliptic-curve Digital Signatures  |





|                      |                                      |      |                                |
|----------------------|--------------------------------------|------|--------------------------------|
|                      | CRYPTO_ALGOFAM_POLY1305              | 0x2D | MAC calculation algorithm      |
|                      | CRYPTO_ALGOFAM_X25519                | 0x2E | Elliptic curve X25519 for ECDH |
|                      | CRYPTO_ALGOFAM_ECDH                  | 0x2F | Elliptic-curve Diffie Hellman  |
|                      | CRYPTO_ALGOFAM_CUSTOM                | 0xff | Custom algorithm family        |
| <b>Description</b>   | Enumeration of the algorithm family. |      |                                |
| <b>Available via</b> | Crypto_GeneralTypes.h                |      |                                |

]

### [SWS\_Csm\_01048] Definition of datatype Crypto\_AlgorithmModeType [

|                      |                                   |            |   |
|----------------------|-----------------------------------|------------|---|
| <b>Name</b>          | Crypto_AlgorithmModeType          |            |   |
| <b>Kind</b>          | Enumeration                       |            |   |
| <b>Range</b>         | CRYPTO_ALGOMODE_NOT_SET           | 0x00       | Algorithm key is not set                            |
|                      | CRYPTO_ALGOMODE_ECB               | 0x01       | Blockmode: Electronic Code Book                     |
|                      | CRYPTO_ALGOMODE_CBC               | 0x02       | Blockmode: Cipher Block Chaining                    |
|                      | CRYPTO_ALGOMODE_CFB               | 0x03       | Blockmode: Cipher Feedback Mode                     |
|                      | CRYPTO_ALGOMODE_OFB               | 0x04       | Blockmode: Output Feedback Mode                     |
|                      | CRYPTO_ALGOMODE_CTR               | 0x05       | Blockmode: Counter Modex                            |
|                      | CRYPTO_ALGOMODE_GCM               | 0x06       | Blockmode: Galois/Counter Mode                      |
|                      | CRYPTO_ALGOMODE_XTS               | 0x07       | XEX Tweakable Block Cipher with Ciphertext Stealing |
|                      | CRYPTO_ALGOMODE_RSAES_OAEP        | 0x08       | RSA Optimal Asymmetric Encryption Padding           |
|                      | CRYPTO_ALGOMODE_RSAES_PKCS1_v1_5  | 0x09       | RSA encryption/decryption with PKCS#1 v1.5 padding  |
|                      | CRYPTO_ALGOMODE_RSASSA_PSS        | 0x0a       | RSA Probabilistic Signature Scheme                  |
|                      | CRYPTO_ALGOMODE_RSASSA_PKCS1_v1_5 | 0x0b       | RSA signature with PKCS#1 v1.5                      |
|                      | CRYPTO_ALGOMODE_8ROUNDS           | 0x0c       | 8 rounds (e.g. ChaCha8)                             |
|                      | CRYPTO_ALGOMODE_12ROUNDS          | 0x0d       | 12 rounds (e.g. ChaCha12)                           |
|                      | CRYPTO_ALGOMODE_20ROUNDS          | 0x0e       | 20 rounds (e.g. ChaCha20)                           |
|                      | CRYPTO_ALGOMODE_HMAC              | 0x0f       | Hashed-based MAC                                    |
|                      | CRYPTO_ALGOMODE_CMAC              | 0x10       | Cipher-based MAC                                    |
| CRYPTO_ALGOMODE_GMAC | 0x11                              | Galois MAC |   |







|                      |                                   |      |  |
|----------------------|-----------------------------------|------|--|
|                      | CRYPTO_ALGOMODE_CTRDRBG           | 0x12 | Counter-based Deterministic Random Bit Generator |
|                      | CRYPTO_ALGOMODE_SIPHASH_2_4       | 0x13 | Siphash-2-4                                      |
|                      | CRYPTO_ALGOMODE_SIPHASH_4_8       | 0x14 | Siphash-4-8                                      |
|                      | CRYPTO_ALGOMODE_PXXXR1            | 0x15 | ANSI R1 Curve                                    |
|                      | CRYPTO_ALGOMODE_AESKEYWRAP        | 0x16 | AES Key Wrap (RFC 3394)                          |
|                      | CRYPTO_ALGOMODE_CUSTOM            | 0xff | Custom algorithm mode                            |
| <b>Description</b>   | Enumeration of the algorithm mode |      |  |
| <b>Available via</b> | Crypto_GeneralTypes.h             |      |  |

]

### [SWS\_Csm\_91024] Definition of datatype Crypto\_InputOutputRedirectionConfig Type [

|                      |  |      |   |
|----------------------|--|------|---|
| <b>Name</b>          | Crypto_InputOutputRedirectionConfigType  |      |   |
| <b>Kind</b>          | Enumeration  |      |   |
| <b>Range</b>         | CRYPTO_REDIRECT_CONFIG_PRIMARY_INPUT   | 0x01 | – |
|                      | CRYPTO_REDIRECT_CONFIG_SECONDARY_INPUT   | 0x02 | – |
|                      | CRYPTO_REDIRECT_CONFIG_TERTIARY_INPUT  | 0x04 | – |
|                      | CRYPTO_REDIRECT_CONFIG_PRIMARY_OUTPUT  | 0x10 | – |
|                      | CRYPTO_REDIRECT_CONFIG_SECONDARY_OUTPUT  | 0x20 | – |
| <b>Description</b>   | Defines which of the input/output parameters are re-directed to a key element. The values can be combined to define a bit field. |      |   |
| <b>Available via</b> | Crypto_GeneralTypes.h  |      |   |

]

### [SWS\_Csm\_01013] Definition of datatype Crypto\_JobType [

|                 |                |                                   |
|-----------------|----------------|-----------------------------------|
| <b>Name</b>     | Crypto_JobType |                                   |
| <b>Kind</b>     | Structure      |                                   |
| <b>Elements</b> | jobId          |                                   |
|                 | <b>Type</b>    | uint32                            |
|                 | <b>Comment</b> | Identifier for the job structure. |
|                 | jobState       |                                   |





|                      |  |  |
|----------------------|--|--|
|                      | <b>Type</b>  | <a href="#">Crypto_JobStateType</a>  |
|                      | <b>Comment</b>   | Determines the current job state.  |
|                      | jobPrimitiveInputOutput  |  |
|                      | <b>Type</b>  | <a href="#">Crypto_JobPrimitiveInputOutputType</a>   |
|                      | <b>Comment</b>   | Structure containing input and output information depending on the job and the crypto primitive.         |
|                      | jobPrimitiveInfo   |  |
|                      | <b>Type</b>  | <a href="#">const Crypto_JobPrimitiveInfoType*</a>   |
|                      | <b>Comment</b>   | Pointer to a structure containing further information which depends on the job and the crypto primitive. |
|                      | jobRedirectionInfoRef  |  |
|                      | <b>Type</b>  | <a href="#">Crypto_JobRedirectionInfoType*</a>   |
|                      | <b>Comment</b>   | Pointer to a structure containing further information on the usage of keys as input and output for jobs. |
|                      | cryptoKeyId  |  |
|                      | <b>Type</b>  | uint32   |
|                      | <b>Comment</b>   | Identifier of the Crypto Driver key. The identifier shall be written by the Crypto Interface.            |
|                      | targetCryptoKeyId  |  |
|                      | <b>Type</b>  | uint32   |
|                      | <b>Comment</b>   | Target identifier of the Crypto Driver key. The identifier shall be written by the Crypto Interface.     |
|                      | jobPriority  |  |
|                      | <b>Type</b>  | const uint32   |
|                      | <b>Comment</b>   | Specifies the importance of the job (the higher, the more important).                                    |
| <b>Description</b>   | Structure which contains further information, which depends on the job and the crypto primitive. |  |
| <b>Available via</b> | Crypto_GeneralTypes.h  |  |

]

### [SWS\_Csm\_01028] Definition of datatype [Crypto\\_JobStateType](#) [

|                      |                                       |      |   |
|----------------------|---------------------------------------|------|---|
| <b>Name</b>          | Crypto_JobStateType                   |      |   |
| <b>Kind</b>          | Enumeration                           |      |   |
| <b>Range</b>         | CRYPTO_JOBSTATE_IDLE                  | 0x00 | Job is in the state "idle". This state is reached after Csm_Init() or when the "Finish" state is finished.  |
|                      | CRYPTO_JOBSTATE_ACTIVE                | 0x01 | Job is in the state "active". There was already some input or there are intermediate results. This state is reached, when the "update" or "start" operation finishes. |
| <b>Description</b>   | Enumeration of the current job state. |      |   |
| <b>Available via</b> | Crypto_GeneralTypes.h                 |      |   |

]

**[SWS\_Csm\_01009] Definition of datatype Crypto\_JobPrimitiveInputOutputType**

|                 |  |   |
|-----------------|--|---|
| <b>Name</b>     | Crypto_JobPrimitiveInputOutputType                                     |   |
| <b>Kind</b>     | Structure  |   |
| <b>Elements</b> | inputPtr   |   |
|                 | <b>Type</b>  | const uint8*  |
|                 | <b>Comment</b>   | Pointer to the input data.  |
|                 | inputLength  |   |
|                 | <b>Type</b>  | uint32  |
|                 | <b>Comment</b>   | Contains the input length in bytes.   |
|                 | secondaryInputPtr  |   |
|                 | <b>Type</b>  | const uint8*  |
|                 | <b>Comment</b>   | Pointer to the secondary input data (for MacVerify, SignatureVerify).                     |
|                 | secondaryInputLength   |   |
|                 | <b>Type</b>  | uint32  |
|                 | <b>Comment</b>   | Contains the secondary input length in bits or bytes, depending on the requested service. |
|                 | tertiaryInputPtr   |   |
|                 | <b>Type</b>  | const uint8*  |
|                 | <b>Comment</b>   | Pointer to the tertiary input data (for MacVerify, SignatureVerify).                      |
|                 | tertiaryInputLength  |   |
|                 | <b>Type</b>  | uint32  |
|                 | <b>Comment</b>   | Contains the tertiary input length in bytes.  |
|                 | outputPtr  |   |
|                 | <b>Type</b>  | uint8*  |
|                 | <b>Comment</b>   | Pointer to the output data.   |
|                 | outputLengthPtr  |   |
|                 | <b>Type</b>  | uint32*   |
|                 | <b>Comment</b>   | Holds a pointer to a memory location containing the output length in bytes.               |
|                 | secondaryOutputPtr   |   |
|                 | <b>Type</b>  | uint8*  |
|                 | <b>Comment</b>   | Pointer to the secondary output data.   |
|                 | secondaryOutputLengthPtr   |   |
|                 | <b>Type</b>  | uint32*   |
|                 | <b>Comment</b>   | Holds a pointer to a memory location containing the secondary output length in bytes.     |
| verifyPtr       |  |   |
| <b>Type</b>     | <a href="#">Crypto_VerifyResultType*</a>                               |   |
| <b>Comment</b>  | Output pointer to a memory location holding a Crypto_VerifyResult Type |   |
| mode            |  |   |
| <b>Type</b>     | <a href="#">Crypto_OperationModeType</a>                               |   |
| <b>Comment</b>  | Indicator of the mode(s)/operation(s) to be performed                  |   |
| crylfKeyld      |  |   |





|                      |  |   |
|----------------------|--|---|
|                      | <b>Type</b>  | uint32  |
|                      | <b>Comment</b>   | Holds the Crylf key id for key operation services.        |
|                      | targetCrylfKeyld   |   |
|                      | <b>Type</b>  | uint32  |
|                      | <b>Comment</b>   | Holds the target Crylf key id for key operation services. |
| <b>Description</b>   | Structure which contains input and output information depending on the job and the crypto primitive. |   |
| <b>Available via</b> | Crypto_GeneralTypes.h  |   |

]

### [SWS\_Csm\_01012] Definition of datatype Crypto\_JobPrimitiveInfoType

Upstream requirements: [SRS\\_CryptoStack\\_00008](#)

[

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Name</b>          | Crypto_JobPrimitiveInfoType  |   |  |
| <b>Kind</b>          | Structure  |   |  |
| <b>Elements</b>      | callbackld   |   |  |
|                      | <b>Type</b>  | uint32  |  |
|                      | <b>Comment</b>   | Internal identifier of the callback function, to be called by Csm, if the configured service is finished. |  |
|                      | primitiveInfo  |   |  |
|                      | <b>Type</b>  | <a href="#">const Crypto_PrimitiveInfoType*</a>   |  |
|                      | <b>Comment</b>   | Pointer to a structure containing further configuration of the crypto primitives                          |  |
|                      | crylfKeyld   |   |  |
|                      | <b>Type</b>  | uint32  |  |
|                      | <b>Comment</b>   | Identifier of the Crylf key.  |  |
|                      | processingType   |   |  |
| <b>Type</b>          | <a href="#">Crypto_ProcessingType</a>  |   |  |
| <b>Comment</b>       | Determines the synchronous or asynchronous behavior.   |   |  |
| <b>Description</b>   | Structure which contains further information, which depends on the job and the crypto primitive. |   |  |
| <b>Available via</b> | Crypto_GeneralTypes.h  |   |  |

]

### [SWS\_Csm\_01031] Definition of datatype Crypto\_ServiceInfoType [

|              |                        |      |                     |
|--------------|------------------------|------|---------------------|
| <b>Name</b>  | Crypto_ServiceInfoType |      |                     |
| <b>Kind</b>  | Enumeration            |      |                     |
| <b>Range</b> | CRYPTO_HASH            | 0x00 | Hash Service        |
|              | CRYPTO_MACGENERATE     | 0x01 | MacGenerate Service |
|              | CRYPTO_MACVERIFY       | 0x02 | MacVerify Service   |
|              | CRYPTO_ENCRYPT         | 0x03 | Encrypt Service     |





|                      |   |      |                               |
|----------------------|---|------|-------------------------------|
|                      | CRYPTO_DECRYPT                          | 0x04 | Decrypt Service               |
|                      | CRYPTO_AEADENCRYPT                      | 0x05 | AEADEncrypt Service           |
|                      | CRYPTO_AEADDECRYPT                      | 0x06 | AEADDecrypt Service           |
|                      | CRYPTO_SIGNATUREGENERATE                | 0x07 | SignatureGenerate Service     |
|                      | CRYPTO_SIGNATUREVERIFY                  | 0x08 | SignatureVerify Service       |
|                      | CRYPTO_RANDOMGENERATE                   | 0x0B | RandomGenerate Service        |
|                      | CRYPTO_RANDOMSEED                       | 0x0C | RandomSeed Service            |
|                      | CRYPTO_KEYGENERATE                      | 0x0D | KeyGenerate Service           |
|                      | CRYPTO_KEYDERIVE                        | 0x0E | KeyDerive Service             |
|                      | CRYPTO_KEYEXCHANGE-CALCPUBVAL           | 0x0F | KeyExchangeCalcPubVal Service |
|                      | CRYPTO_KEYEXCHANGE-CALCSECRET           | 0x10 | KeyExchangeCalcSecret Service |
|                      | CRYPTO_KEYSETVALID                      | 0x13 | KeySetValid Service           |
|                      | CRYPTO_KEYSETINVALID                    | 0x14 | KeySetInvalid Service         |
|                      | CRYPTO_CUSTOM_SERVICE                   | 0x15 | Custom service job            |
|                      | CRYPTO_KEYWRAP                          | 0x16 | KeyWrap Service               |
|                      | CRYPTO_KEYUNWRAP                        | 0x17 | KeyUnwrap Service             |
| <b>Description</b>   | Enumeration of the kind of the service. |      |                               |
| <b>Available via</b> | Crypto_GeneralTypes.h                   |      |                               |

]

### [SWS\_Csm\_91026] Definition of datatype Crypto\_JobRedirectionInfoType [

|                            |                               |  |
|----------------------------|-------------------------------|--|
| <b>Name</b>                | Crypto_JobRedirectionInfoType |  |
| <b>Kind</b>                | Structure                     |  |
| <b>Elements</b>            | redirectionConfig             |  |
|                            | <b>Type</b>                   | uint8  |
|                            | <b>Comment</b>                | Bit structure which indicates which buffer shall be redirected to a key element. Values from Crypto_InputOutputRedirectionConfigType can be used and combined with unary OR operation. |
|                            | inputKeyId                    |  |
|                            | <b>Type</b>                   | uint32   |
|                            | <b>Comment</b>                | Identifier of the key which shall be used as input   |
|                            | inputKeyElementId             |  |
|                            | <b>Type</b>                   | uint32   |
|                            | <b>Comment</b>                | Identifier of the key element which shall be used as input   |
|                            | secondaryInputKeyId           |  |
|                            | <b>Type</b>                   | uint32   |
|                            | <b>Comment</b>                | Identifier of the key which shall be used as secondary input   |
| secondaryInputKeyElementId |                               |  |
| <b>Type</b>                | uint32                        |  |





|                      |   |   |
|----------------------|---|---|
|                      | <b>Comment</b>  | Identifier of the key element which shall be used as secondary input  |
|                      | tertiaryInputKeyld  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key which shall be used as tertiary input           |
|                      | tertiaryInputKeyElementld   |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key element which shall be used as tertiary input   |
|                      | outputKeyld   |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key which shall be used as output                   |
|                      | outputKeyElementld  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key element which shall be used as output           |
|                      | secondaryOutputKeyld  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key which shall be used as secondary output         |
|                      | secondaryOutputKeyElementld   |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Comment</b>  | Identifier of the key element which shall be used as secondary output |
| <b>Description</b>   | Structure which holds the identifiers of the keys and key elements which shall be used as input and output for a job and a bit structure which indicates which buffers shall be redirected to those key elements. |   |
| <b>Available via</b> | Crypto_GeneralTypes.h   |   |

]

### [SWS\_Csm\_01008] Definition of datatype `Crypto_AlgorithmInfoType` [

|                    |   |   |
|--------------------|---|---|
| <b>Name</b>        | Crypto_AlgorithmInfoType  |   |
| <b>Kind</b>        | Structure   |   |
| <b>Elements</b>    | family  |   |
|                    | <b>Type</b>   | <a href="#">Crypto_AlgorithmFamilyType</a>            |
|                    | <b>Comment</b>  | The family of the algorithm                           |
|                    | secondaryFamily   |   |
|                    | <b>Type</b>   | <a href="#">Crypto_AlgorithmFamilyType</a>            |
|                    | <b>Comment</b>  | The secondary family of the algorithm                 |
|                    | keyLength   |   |
|                    | <b>Type</b>   | uint32  |
|                    | <b>Comment</b>  | The key length in bits to be used with that algorithm |
|                    | mode  |   |
|                    | <b>Type</b>   | <a href="#">Crypto_AlgorithmModeType</a>              |
|                    | <b>Comment</b>  | The operation mode to be used with that algorithm     |
| <b>Description</b> | Structure which determines the exact algorithm. Note, not every algorithm needs to specify all fields. AUTOSAR shall only allow valid combinations. |   |





|                      |                       |
|----------------------|-----------------------|
| <b>Available via</b> | Crypto_GeneralTypes.h |
|----------------------|-----------------------|

]

### [SWS\_Csm\_01049] Definition of datatype Crypto\_ProcessingType

Upstream requirements: [SRS\\_CryptoStack\\_00100](#), [SRS\\_CryptoStack\\_00101](#)

[

|                      |                                     |      |                             |
|----------------------|-------------------------------------|------|-----------------------------|
| <b>Name</b>          | Crypto_ProcessingType               |      |                             |
| <b>Kind</b>          | Enumeration                         |      |                             |
| <b>Range</b>         | CRYPTO_PROCESSING_ASYNC             | 0x00 | Asynchronous job processing |
|                      | CRYPTO_PROCESSING_SYNC              | 0x01 | Synchronous job processing  |
| <b>Description</b>   | Enumeration of the processing type. |      |                             |
| <b>Available via</b> | Crypto_GeneralTypes.h               |      |                             |

]

### [SWS\_Csm\_01011] Definition of datatype Crypto\_PrimitiveInfoType [

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Name</b>          | Crypto_PrimitiveInfoType   |   |  |
| <b>Kind</b>          | Structure  |   |  |
| <b>Elements</b>      | service  |   |  |
|                      | <b>Type</b>  | <a href="#">const Crypto_ServiceInfoType</a>        |  |
|                      | <b>Comment</b>   | Contains the enum of the used service, e.g. Encrypt |  |
|                      | algorithm  |   |  |
|                      | <b>Type</b>  | <a href="#">const Crypto_AlgorithmInfoType</a>      |  |
|                      | <b>Comment</b>   | Contains the information of the used algorithm      |  |
| <b>Description</b>   | Structure which contains basic information about the crypto primitive. |   |  |
| <b>Available via</b> | Crypto_GeneralTypes.h  |   |  |

]

## 8.3 Function definitions

[SWS\_Csm\_00478] [All functions need not to be reentrant. For behavior in case of a reentrant call see [[SWS\\_Csm\\_00017](#)].]

### 8.3.1 General Interface

#### [SWS\_Csm\_00646] Definition of API function Csm\_Init

Upstream requirements: [SRS\\_BSW\\_00101](#), [SRS\\_BSW\\_00358](#), [SRS\\_BSW\\_00414](#)

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_Init   |   |
| <b>Syntax</b>             | <pre>void Csm_Init (     const Csm_ConfigType* configPtr )</pre>   |   |
| <b>Service ID [hex]</b>   | 0x00   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | configPtr  | Pointer to a selected configuration structure |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | None   |   |
| <b>Description</b>        | Initializes the CSM module. In configurations, in which Csm is assigned to more than one partition (i.e. Csm_MainFunctions are mapped to partitions), Csm may provide one init function per partition. |   |
| <b>Available via</b>      | Csm.h  |   |

]

#### [SWS\_Csm\_00186]

Upstream requirements: [SWS\\_BSW\\_00050](#)

[The Configuration pointer `configPtr` shall always have a `null` pointer value.]

The Configuration pointer `configPtr` is currently not used and shall therefore be set `null` pointer value.

[SWS\_Csm\_00659] [If the initialization of the CSM module fails, the CSM shall report `CSM_E_INIT_FAILED` to the DET when `CsmDevErrorDetect` is true.]

#### [SWS\_Csm\_00705] Definition of API function Csm\_GetVersionInfo

Upstream requirements: [SRS\\_BSW\\_00407](#)

[

|                         |   |  |
|-------------------------|---|--|
| <b>Service Name</b>     | Csm_GetVersionInfo  |  |
| <b>Syntax</b>           | <pre>void Csm_GetVersionInfo (     Std_VersionInfoType* versioninfo )</pre> |  |
| <b>Service ID [hex]</b> | 0x3b  |  |
| <b>Sync/Async</b>       | Synchronous   |  |

▽





|                           |   |   |
|---------------------------|---|---|
| <b>Reentrancy</b>         | Reentrant                                       |   |
| <b>Parameters (in)</b>    | None  |   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | versioninfo                                     | Pointer to where to store the version information of this module. |
| <b>Return value</b>       | None  |   |
| <b>Description</b>        | Returns the version information of this module. |   |
| <b>Available via</b>      | Csm.h   |   |

]

### 8.3.2 Hash Interface

A cryptographic hash function is a deterministic procedure that takes an arbitrary block of data and returns a fixed-size bit string, the hash value, such that an accidental or intentional change to the data will change the hash value. Main properties of hash functions are that it is infeasible to find a message that has a given hash or to find two different messages with the same hash.

#### [SWS\_Csm\_00980] Definition of API function Csm\_Hash

Upstream requirements: [SRS\\_CryptoStack\\_00024](#)

[

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_Hash   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_Hash (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     uint8* resultPtr,     uint32* resultLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x5d   |  |
| <b>Sync/Async</b>         | Depends on configuration   |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.   |
|                           | mode   | Indicates which operation mode(s) to perform.  |
|                           | dataPtr  | Contains the pointer to the data for which the hash shall be computed.   |
|                           | dataLength   | Contains the number of bytes to be hashed.   |
| <b>Parameters (inout)</b> | resultLengthPtr  | Holds a pointer to the memory location in which the output length in bytes is stored. On calling this function, this parameter shall contain the size of the buffer provided by resultPtr. When the request has finished, the actual length of the returned value shall be stored. If the provided length information is smaller than the total length of the hash result, the resultPtr will contain the truncated hash result. |





|                         |  |  |
|-------------------------|--|--|
| <b>Parameters (out)</b> | resultPtr  | Contains the pointer to the data where the hash value shall be stored. |
| <b>Return value</b>     | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed                   |
| <b>Description</b>      | Uses the given data to perform the hash calculation and stores the hash. |  |
| <b>Available via</b>    | Csm.h  |  |

]

### 8.3.3 MAC Interface

A message authentication code (MAC) is a short piece of information used to authenticate a message. A MAC algorithm accepts as input a secret key and an arbitrary-length message to be authenticated, and outputs a MAC. The MAC value protects both a message's data integrity as well as its authenticity, by allowing verifiers (who also possess the secret key) to detect any changes to the message content.

#### [SWS\_Csm\_00982] Definition of API function Csm\_MacGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00022](#)

[

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_MacGenerate   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_MacGenerate (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     uint8* macPtr,     uint32* macLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x60  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Contains the pointer to the data for which the MAC shall be computed.  |
|                           | dataLength  | Contains the number of bytes to be hashed.   |
| <b>Parameters (inout)</b> | macLengthPtr  | Holds a pointer to the memory location in which the output length in bytes is stored. On calling this function, this parameter shall contain the size of the buffer provided by macPtr. When the request has finished, the actual length of the returned MAC shall be stored. If the provided length information is smaller than the total length of the MAC result, the macPtr will contain the truncated MAC result. |
| <b>Parameters (out)</b>   | macPtr  | Contains the pointer to the data where the MAC shall be stored.  |





|                      |  |  |
|----------------------|--|--|
| <b>Return value</b>  | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>   | Uses the given data to perform a MAC generation and stores the MAC in the memory location pointed to by the MAC pointer. |  |
| <b>Available via</b> | Csm.h  |  |

]

### [SWS\_Csm\_01050] Definition of API function Csm\_MacVerify [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_MacVerify   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_MacVerify (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     const uint8* macPtr,     uint32 macLength,     Crypto_VerifyResultType* verifyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x61  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Holds a pointer to the data for which the MAC shall be verified.   |
|                           | dataLength  | Contains the number of data bytes for which the MAC shall be verified.   |
|                           | macPtr  | Holds a pointer to the MAC to be verified.   |
|                           | macLength   | Contains the MAC length in BITS to be verified.  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | verifyPtr   | Holds a pointer to the memory location, which will hold the result of the MAC verification.  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Verifies the given MAC by comparing if the MAC is generated with the given data.  |  |
| <b>Available via</b>      | Csm.h   |  |

]

### 8.3.4 CipherInterface

The cipher interfaces can be used for symmetrical and asymmetrical encryption or decryption. Furthermore, it is also possible to use these interfaces for compression and decompression, respectively.

#### [SWS\_Csm\_00984] Definition of API function Csm\_Encrypt

Upstream requirements: [SRS\\_CryptoStack\\_00020](#), [SRS\\_CryptoStack\\_00021](#)

[

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_Encrypt   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_Encrypt (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     uint8* resultPtr,     uint32* resultLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x5e  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Contains the pointer to the data to be encrypted.  |
|                           | dataLength  | Contains the number of bytes to encrypt.   |
| <b>Parameters (inout)</b> | resultLengthPtr   | Holds a pointer to the memory location in which the output length information is stored in bytes. On calling this function, this parameter shall contain the size of the buffer provided by result Ptr. When the request has finished, the actual length of the returned value shall be stored.  |
| <b>Parameters (out)</b>   | resultPtr   | Contains the pointer to the data where the encrypted data shall be stored.   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Encrypts the given data and store the ciphertext in the memory location pointed by the result pointer.  |  |
| <b>Available via</b>      | Csm.h   |  |

]

In the case of block ciphers, it shall be possible to pass a `dataLength` which is not a multiple of the corresponding block size. The underlying Crypto Driver is responsible for handling these input data.

## [SWS\_Csm\_00989] Definition of API function Csm\_Decrypt

Upstream requirements: [SRS\\_CryptoStack\\_00020](#), [SRS\\_CryptoStack\\_00021](#)

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_Decrypt   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_Decrypt (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     uint8* resultPtr,     uint32* resultLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x5f  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Contains the pointer to the data to be decrypted.  |
|                           | dataLength  | Contains the number of bytes to decrypt.   |
| <b>Parameters (inout)</b> | resultLengthPtr   | Holds a pointer to the memory location in which the output length information is stored in bytes. On calling this function, this parameter shall contain the size of the buffer provided by result Ptr. When the request has finished, the actual length of the returned value shall be stored.  |
| <b>Parameters (out)</b>   | resultPtr   | Contains the pointer to the memory location where the decrypted data shall be stored.  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Decrypts the given encrypted data and store the decrypted plaintext in the memory location pointed by the result pointer.   |  |
| <b>Available via</b>      | Csm.h   |  |

### 8.3.5 Authenticated Encryption with Associated Data (AEAD) Interface

AEAD (also known as Authenticated Encryption) is a block cipher mode of operation which also allows integrity checks (e.g. AES-GCM).

[SWS\_Csm\_01023] Definition of API function Csm\_AEADEncrypt [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | Csm_AEADEncrypt   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_AEADEncrypt (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* plaintextPtr,     uint32 plaintextLength,     const uint8* associatedDataPtr,     uint32 associatedDataLength,     uint8* ciphertextPtr,     uint32* ciphertextLengthPtr,     uint8* tagPtr,     uint32* tagLengthPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x62  |   |
| <b>Sync/Async</b>         | Depends on configuration  |   |
| <b>Reentrancy</b>         | Reentrant   |   |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.  |
|                           | mode  | Indicates which operation mode(s) to perform.   |
|                           | plaintextPtr  | Contains the pointer to the data to be encrypted.   |
|                           | plaintextLength   | Contains the number of bytes to encrypt.  |
|                           | associatedDataPtr   | Contains the pointer to the associated data.  |
|                           | associatedDataLength  | Contains the number of bytes of the associated data.  |
| <b>Parameters (inout)</b> | ciphertextLengthPtr   | Holds a pointer to the memory location in which the output length in bytes of the ciphertext is stored. On calling this function, this parameter shall contain the size of the buffer in bytes provided by resultPtr. When the request has finished, the actual length of the returned value shall be stored.   |
|                           | tagLengthPtr  | Holds a pointer to the memory location in which the output length in bytes of the Tag is stored. On calling this function, this parameter shall contain the size of the buffer in bytes provided by resultPtr. When the request has finished, the actual length of the returned value shall be stored.  |
| <b>Parameters (out)</b>   | ciphertextPtr   | Contains the pointer to the data where the encrypted data shall be stored.  |
|                           | tagPtr  | Contains the pointer to the data where the Tag shall be stored.   |
| <b>Return value</b>       | Std_ReturnType  | <p>E_OK: Request successful<br/> E_NOT_OK: Request failed<br/> CRYPTO_E_BUSY: Request failed, service is still busy<br/> CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br/> CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br/> CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element</p> |
| <b>Description</b>        | Uses the given input data to perform an AEAD encryption and stores the ciphertext and the MAC in the memory locations pointed to by the ciphertext pointer and Tag pointer.   |   |
| <b>Available via</b>      | Csm.h   |   |

]

**[SWS\_Csm\_01026] Definition of API function Csm\_AEADDecrypt [**

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_AEADDecrypt   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_AEADDecrypt (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* ciphertextPtr,     uint32 ciphertextLength,     const uint8* associatedDataPtr,     uint32 associatedDataLength,     const uint8* tagPtr,     uint32 tagLength,     uint8* plaintextPtr,     uint32* plaintextLengthPtr,     Crypto_VerifyResultType* verifyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x63  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | ciphertextPtr   | Contains the pointer to the data to be decrypted.  |
|                           | ciphertextLength  | Contains the number of bytes to decrypt.   |
|                           | associatedDataPtr   | Contains the pointer to the associated data.   |
|                           | associatedDataLength  | Contains the length in bytes of the associated data.   |
|                           | tagPtr  | Contains the pointer to the Tag to be verified.  |
|                           | tagLength   | Contains the length in bytes of the Tag to be verified.  |
| <b>Parameters (inout)</b> | plaintextLengthPtr  | Holds a pointer to the memory location in which the output length in bytes of the plaintext is stored. On calling this function, this parameter shall contain the size of the buffer provided by plaintextPtr. When the request has finished, the actual length of the returned value shall be stored.   |
| <b>Parameters (out)</b>   | plaintextPtr  | Contains the pointer to the data where the decrypted data shall be stored.   |
|                           | verifyPtr   | Contains the pointer to the result of the verification.  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Uses the given data to perform an AEAD encryption and stores the ciphertext and the MAC in the memory locations pointed by the ciphertext pointer and Tag pointer.  |  |
| <b>Available via</b>      | Csm.h   |  |

**8.3.6 Signature Interface**

A digital signature is a type of asymmetric cryptography. Digital signatures are equivalent to traditional handwritten signatures in many respects.

Digital signatures can be used to authenticate the source of messages as well as to prove integrity of signed messages. If a message is digitally signed, any change in the message after signature will invalidate the signature. Furthermore, there is no efficient way to modify a message and its signature to produce a new message with a valid signature.

### [SWS\_Csm\_00992] Definition of API function Csm\_SignatureGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00023](#)

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_SignatureGenerate   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_SignatureGenerate (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     uint8* signaturePtr,     uint32* signatureLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x76  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Contains the pointer to the data to be signed.   |
|                           | dataLength  | Contains the number of bytes to sign.  |
| <b>Parameters (inout)</b> | signatureLengthPtr  | Holds a pointer to the memory location in which the output length in bytes of the signature is stored. On calling this function, this parameter shall contain the size of the buffer provided by result Ptr. When the request has finished, the actual length of the returned value shall be stored.   |
| <b>Parameters (out)</b>   | signaturePtr  | Contains the pointer to the data where the signature shall be stored.  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Uses the given data to perform the signature calculation and stores the signature in the memory location pointed by the result pointer.   |  |
| <b>Available via</b>      | Csm.h   |  |



## [SWS\_Csm\_00996] Definition of API function Csm\_SignatureVerify

Upstream requirements: [SRS\\_CryptoStack\\_00023](#)

[

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_SignatureVerify   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_SignatureVerify (     uint32 jobId,     Crypto_OperationModeType mode,     const uint8* dataPtr,     uint32 dataLength,     const uint8* signaturePtr,     uint32 signatureLength,     Crypto_VerifyResultType* verifyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x64  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.   |
|                           | mode  | Indicates which operation mode(s) to perform.  |
|                           | dataPtr   | Contains the pointer to the data to be verified.   |
|                           | dataLength  | Contains the number of data bytes.   |
|                           | signaturePtr  | Holds a pointer to the signature to be verified.   |
|                           | signatureLength   | Contains the signature length in bytes.  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | verifyPtr   | Holds a pointer to the memory location, which will hold the result of the signature verification.  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, a key element has the wrong size<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Verifies the given signature by checking if it was generated with the given data.   |  |
| <b>Available via</b>      | Csm.h   |  |

]

### 8.3.7 Random Interface

The random interface provides generation of random numbers. A random number can be generated either by a physical device (true random number generator), or by computational algorithms (pseudo random number generator). The randomness of pseudo random number generators can be increased by an appropriate selection of the seed.

**Note:** How the random generators are seeded is project specific and out of scope of this specification. If applicable, proper seeding actions shall be done prior to request any random numbers.

An ECU-centralized generation of entropy is recommended, to seed random number generators. Especially if no true random number generator (TRNG) in hardware is available for generation of random numbers.

### [SWS\_Csm\_01543] Definition of API function Csm\_RandomGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00019](#)

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_RandomGenerate   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_RandomGenerate (     uint32 jobId,     uint8* resultPtr,     uint32* resultLengthPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x72   |   |
| <b>Sync/Async</b>         | Depends on configuration   |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.  |
| <b>Parameters (inout)</b> | resultLengthPtr  | Holds a pointer to the memory location in which the result length in bytes is stored. On calling this function, this parameter shall contain the size of the buffer provided by resultPtr. When the request has finished, the actual length of the returned random number shall be stored. If the provided length information is smaller than the total length of the random number result, the resultPtr will contain the truncated random number. |
| <b>Parameters (out)</b>   | resultPtr  | Holds a pointer to the memory location which will hold the result of the random number generation.  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_ENTROPY_EXHAUSTED: Request failed, entropy of random number generator is exhausted   |
| <b>Description</b>        | Generate a random number and stores it in the memory location pointed by the result pointer.                         |   |
| <b>Available via</b>      | Csm.h  |   |

To generate a random number, no streaming approach is necessary. The interface [Csm\\_RandomGenerate](#) can be called arbitrarily often to generate multiple random numbers.

[SWS\_Csm\_01054] [The operation mode of the [Csm\\_RandomGenerate](#) function call shall be set to [CRYPTO\\_OPERATIONMODE\\_SINGLECALL](#).]

### 8.3.8 Key Management Interface

The following interfaces are used for key management. Basically, a key contains of one ore more key elements. A key element can be part of multiple keys. For example, this

allows to derive a key element from a password with one keyId, and to use this derived key element for encryption with another keyId.

**Note:** If the actual key element to be modified is directly mapped to flash memory, there could be a bigger delay when calling the key management functions (synchronous operation)

**[SWS\_Csm\_00974]** [If a key management function is called, the CSM shall disable processing new jobs from the queue until the next call of the main function.]

### 8.3.8.1 Key Setting Interface

**[SWS\_Csm\_00957]** Definition of API function `Csm_KeyElementSet` [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_KeyElementSet  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyElementSet (     uint32 keyId,     uint32 keyElementId,     const uint8* keyElementPtr,     uint32 keyElementLength )</pre> |  |
| <b>Service ID [hex]</b>   | 0x78   |  |
| <b>Sync/Async</b>         | Synchronous  |  |
| <b>Reentrancy</b>         | Non Reentrant  |  |
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key for which a new material shall be set.   |
|                           | keyElementId   | Holds the identifier of the key element to be written.   |
|                           | keyElementPtr  | Holds the pointer to the key element bytes to be processed.  |
|                           | keyElementLength   | Contains the number of key element bytes.  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed because write access was denied<br>CRYPTO_E_KEY_NOT_AVAILABLE: Request failed because the key is not available<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element size does not match size of provided data |
| <b>Description</b>        | Sets the given key element bytes to the key identified by keyId.   |  |
| <b>Available via</b>      | Csm.h  |  |

]

**Note:** In case of error observed during `Csm_KeyElementSet` API call, the status of the key element needs to be considered as unknown. The application could explicitly check the key content status by calling `Csm_KeyGetStatus`.

[SWS\_Csm\_01002] [If no errors are detected by Csm, the service [Csm\\_KeyElementSet](#) shall call `CryIf_KeyElementSet`.]

[SWS\_Csm\_00958] **Definition of API function `Csm_KeySetValid`** [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | Csm_KeySetValid   |   |
| <b>Syntax</b>             | Std_ReturnType Csm_KeySetValid (<br>uint32 keyId<br>)       |   |
| <b>Service ID [hex]</b>   | 0x67  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | keyId   | Holds the identifier of the key for which a new material shall be validated.  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypro Driver Object is busy |
| <b>Description</b>        | Sets the key state of the key identified by keyId to valid. |   |
| <b>Available via</b>      | Csm.h   |   |

]

[SWS\_Csm\_01003] [If no errors are detected by Csm, the service [Csm\\_KeySetValid](#) shall call `CryIf_KeySetValid`.]

[SWS\_Csm\_91075] **Definition of API function `Csm_KeySetInvalid`** [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_KeySetInvalid  |   |
| <b>Syntax</b>             | Std_ReturnType Csm_KeySetInvalid (<br>uint32 keyId<br>)  |   |
| <b>Service ID [hex]</b>   | 0x85   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Non Reentrant  |   |
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key which shall be invalidated.   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypro Driver Object is busy |
| <b>Description</b>        | Sets the key status to invalid. The key cannot be used any longer for cryptographic operations until it has been set to valid state again. |   |
| <b>Available via</b>      | Csm.h  |   |

]

[SWS\_Csm\_91050] [If no errors are detected by Csm, the service [Csm\\_KeySetInvalid](#) shall call `CryIf_KeySetInvalid`.]

### 8.3.8.2 Key Status Interface

#### [SWS\_Csm\_91047] Definition of API function Csm\_KeyGetStatus [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | Csm_KeyGetStatus  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyGetStatus (     uint32 keyId,     Crypto_KeyStatusType* keyStatusPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x83  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant   |   |
| <b>Parameters (in)</b>    | keyId   | Holds the identifier of the key for which the key state shall be returned.    |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | keyStatusPtr  | Contains the pointer to the data where the status of the key shall be stored. |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed                          |
| <b>Description</b>        | Returns the key state of the key identified by keyId.   |   |
| <b>Available via</b>      | Csm.h   |   |

]

[SWS\_Csm\_91048] [If no errors are detected by Csm, the service [Csm\\_KeyGetStatus](#) shall call [CryIf\\_KeyGetStatus](#).]

### 8.3.8.3 Key Extraction Interface

#### [SWS\_Csm\_00959] Definition of API function Csm\_KeyElementGet

Upstream requirements: [SRS\\_CryptoStack\\_00010](#), [SRS\\_CryptoStack\\_00011](#), [SRS\\_CryptoStack\\_00029](#)

[

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | Csm_KeyElementGet  |  |
| <b>Syntax</b>           | <pre>Std_ReturnType Csm_KeyElementGet (     uint32 keyId,     uint32 keyElementId,     uint8* keyElementPtr,     uint32* keyElementLengthPtr )</pre> |  |
| <b>Service ID [hex]</b> | 0x68   |  |
| <b>Sync/Async</b>       | Synchronous  |  |
| <b>Reentrancy</b>       | Reentrant  |  |

▽



|                           |  |  |
|---------------------------|--|--|
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key from which a key element shall be extracted.   |
|                           | keyElementId   | Holds the identifier of the key element to be extracted.   |
| <b>Parameters (inout)</b> | keyElementLengthPtr  | Holds a pointer to the memory location in which the output buffer length in bytes is stored. On calling this function, this parameter shall contain the buffer length in bytes of the keyElementPtr. When the request has finished, the actual size of the written input bytes shall be stored.  |
| <b>Parameters (out)</b>   | keyElementPtr  | Holds the pointer to the memory location where the key element shall be copied to.   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_AVAILABLE: Request failed, the requested key element is not available<br>CRYPTO_E_KEY_READ_FAIL: Request failed because read access was denied<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Retrieves the key element bytes from a specific key element of the key identified by the keyId and stores the key element in the memory location pointed by the key pointer. |  |
| <b>Available via</b>      | Csm.h  |  |

]

**[SWS\_Csm\_01004]** [If no errors are detected by Csm, the service [Csm\\_KeyElementGet](#) shall call `CryIf_KeyElementGet`.]

The underlying Crypto Driver has to decide if and how the key element bytes are extracted.

### 8.3.8.4 Key Copying Interface

**[SWS\_Csm\_00969]** Definition of API function `Csm_KeyElementCopy` [

|                         |   |   |
|-------------------------|---|---|
| <b>Service Name</b>     | Csm_KeyElementCopy  |   |
| <b>Syntax</b>           | <pre>Std_ReturnType Csm_KeyElementCopy (     uint32 keyId,     uint32 keyElementId,     uint32 targetKeyId,     uint32 targetKeyElementId )</pre> |   |
| <b>Service ID [hex]</b> | 0x71  |   |
| <b>Sync/Async</b>       | Synchronous   |   |
| <b>Reentrancy</b>       | Reentrant but not for the same keyId  |   |
| <b>Parameters (in)</b>  | keyId   | Holds the identifier of the key whose key element shall be the source element.            |
|                         | keyElementId  | Holds the identifier of the key element which shall be the source for the copy operation. |





|                           |   |  |
|---------------------------|---|--|
|                           | targetKeyId   | Holds the identifier of the key whose key element shall be the destination element.  |
|                           | targetKeyElementId  | Holds the identifier of the key element which shall be the destination for the copy operation.   |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_AVAILABLE: Request failed, the requested key element is not available<br>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | This function shall copy a key elements from one key to a target key. |  |
| <b>Available via</b>      | Csm.h   |  |

]

[SWS\_Csm\_01032] [If no errors are detected by Csm and the `keyId` and `targetKeyId` are located in different Crypto Drivers, the service `Csm_KeyElementCopy` shall call `CryIf_KeyElementCopy` and pass on the return value.]

#### [SWS\_Csm\_01034] Definition of API function `Csm_KeyCopy` [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_KeyCopy  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyCopy (     uint32 keyId,     uint32 targetKeyId )</pre> |   |
| <b>Service ID [hex]</b>   | 0x73   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant but not for same keyId   |   |
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key whose key element shall be the source element.      |
|                           | targetKeyId  | Holds the identifier of the key whose key element shall be the destination element. |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |





|                      |  |  |
|----------------------|--|--|
| <b>Return value</b>  | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_AVAILABLE: Request failed, the requested key element is not available<br>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>   | This function shall copy all key elements from the source key to a target key. |  |
| <b>Available via</b> | Csm.h  |  |

]

**[SWS\_Csm\_01035]** [If no errors are detected by Csm, the service [Csm\\_KeyCopy](#) shall call `CryIf_KeyCopy` and pass on the return value.]

**Note:** Because there are no checks by Csm and CryIf intended related to key elements during [Csm\\_KeyCopy](#) (e.g.

- sizes of target key elements are greater or equal to the sizes of the corresponding source key elements
- access rights of source and target key elements are allowing a copy between different Crypto drivers via `Crypto_KeyElementGet` and `Crypto_KeyElementGet`)

inconsistent states of target keys are possible in case of an inappropriate configuration. Those inconsistencies have to be identified during development, and should be addressed by configuration.

**[SWS\_Csm\_91025] Definition of API function `Csm_KeyElementCopyPartial` [**

|                         |   |   |
|-------------------------|---|---|
| <b>Service Name</b>     | Csm_KeyElementCopyPartial   |   |
| <b>Syntax</b>           | <pre>Std_ReturnType Csm_KeyElementCopyPartial (     uint32 keyId,     uint32 keyElementId,     uint32 keyElementSourceOffset,     uint32 keyElementTargetOffset,     uint32 keyElementCopyLength,     uint32 targetKeyId,     uint32 targetKeyElementId )</pre> |   |
| <b>Service ID [hex]</b> | 0x79  |   |
| <b>Sync/Async</b>       | Synchronous   |   |
| <b>Reentrancy</b>       | Reentrant, but not for the same keyId   |   |
| <b>Parameters (in)</b>  | keyId   | Holds the identifier of the key whose key element shall be the source element for copy operation. |







|                           |  |  |
|---------------------------|--|--|
|                           | keyElementId   | Holds the identifier of the key element which shall be the source for the copy operation.  |
|                           | keyElementSourceOffset   | This is the offset of the source key element indicating the start index of the copy operation.   |
|                           | keyElementTargetOffset   | This is the offset of the destination key element indicating the start index of the copy operation.  |
|                           | keyElementCopyLength   | Specifies the number of bytes that shall be copied.  |
|                           | targetKeyId  | Holds the identifier of the key whose key element shall be the destination element.  |
|                           | targetKeyElementId   | Holds the identifier of the key element which shall be the destination for the copy operation.   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_AVAILABLE: Request failed, the requested key element is not available<br>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Copies a key element to another key element in the same crypto driver. The keyElementSourceOffset and keyElementCopyLength allows to copy just a part of the source key element into the destination. The offset into the target key is also specified with this function. |  |
| <b>Available via</b>      | Csm.h  |  |

]

**Note:** A Concatenation of partial keys into one key element is possible by calling `Csm_KeyElementCopyPartial` multiple times and adjusting `keyElementTargetOffset` properly.

**[SWS\_Csm\_91019]** [If no errors are detected by Csm shall call `CryIf_KeyElementCopyPartial` and pass on the return value.]

**[SWS\_Csm\_91020]** [If the current length of the target key element is greater or equal than (`keyElementTargetOffset + keyElementCopyLength`), the key element length remains unchanged and the target data is overwritten with the contents of the source data.]

**[SWS\_Csm\_91021]** [If the current length of the target key element is lower than (`keyElementTargetOffset + keyElementCopyLength`) and the maximum length of the key element is greater or equal than (`keyElementTargetOffset + keyElementCopyLength`), then the source data shall be copied into the target key element and the length shall be set to (`keyElementTargetOffset + keyElementCopyLength`).]

**[SWS\_Csm\_91022]** [If the maximum length of the target key element is lower than (`keyElementTargetOffset + keyElementCopyLength`) then the copy operation shall not be performed and the function shall return with the error code `CRYPTO_E_KEY_SIZE_MISMATCH`.]

### 8.3.8.5 Key Generation Interface

The key generation interface is used to generate a key into the key element `CRYPTO_KE_KEYGENERATE_KEY` according to the algorithm defined in the key element `CRYPTO_KE_KEYGENERATE_ALGORITHM`.

The key will be generated from the random value that is located in the key element `CRYPTO_KE_KEYGENERATE_SEED`.

The random value can be generated, for example, with the function `Csm_RandomGenerate` and must be stored in `CRYPTO_KE_KEYGENERATE_SEED` before the key generation is triggered.

It is important to check the quality of the randomness and its entropy of the seed, which depends on the used hardware, and software of a stack. The randomness has a major impact on the quality of the generated key material.

The key element with the id=`CRYPTO_KE_KEYGENERATE_ALGORITHM` contains a type from `Crypto_AlgorithmFamilyType`, e.g. `CRYPTO_ALGOFAM_AES`, `CRYPTO_ALGOFAM_RSA` or `CRYPTO_ALGOFAM_ED25519`, that allows to generate an adequate key.

As a counter example, the algorithm family type `CRYPTO_ALGOFAM_SHA2_256` is not adequate because it provides no hint what key shall be generated.

For the key element `CRYPTO_KE_KEYGENERATE_KEY` the key element configuration item `CryptoKeyElement/CryptoKeyElementFormat` indicates the format of the generated key.

### [SWS\_Csm\_01051] Definition of API function `Csm_RandomSeed` [

|                         |  |  |
|-------------------------|--|--|
| <b>Service Name</b>     | Csm_RandomSeed   |  |
| <b>Syntax</b>           | <pre>Std_ReturnType Csm_RandomSeed (     uint32 keyId,     const uint8* seedPtr,     uint32 seedLength )</pre> |  |
| <b>Service ID [hex]</b> | 0x69   |  |
| <b>Sync/Async</b>       | Synchronous  |  |
| <b>Reentrancy</b>       | Reentrant but not for same keyId   |  |
| <b>Parameters (in)</b>  | keyId  | Holds the identifier of the key for which a new seed shall be generated. |



△

|                           |   |   |
|---------------------------|---|---|
|                           | seedPtr   | Holds a pointer to the memory location which contains the data to feed the seed.  |
|                           | seedLength  | Contains the length of the seed in bytes.   |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Feeds the key element CRYPTO_KE_RANDOM_SEED with a random seed. |   |
| <b>Available via</b>      | Csm.h   |   |

]

**[SWS\_Csm\_01052]** [If no errors are detected by Csm, the service [Csm\\_RandomSeed](#) shall call [CryIf\\_RandomSeed](#).]

### **[SWS\_Csm\_00955] Definition of API function Csm\_KeyGenerate**

*Upstream requirements:* [SRS\\_CryptoStack\\_00026](#), [SRS\\_CryptoStack\\_00027](#)

[

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | Csm_KeyGenerate   |   |
| <b>Syntax</b>             | Std_ReturnType Csm_KeyGenerate (<br>uint32 keyId<br>)                   |   |
| <b>Service ID [hex]</b>   | 0x6a  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Reentrant but not for same keyId  |   |
| <b>Parameters (in)</b>    | keyId   | Holds the identifier of the key for which a new material shall be generated.  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Generates new key material and store it in the key identified by keyId. |   |
| <b>Available via</b>      | Csm.h   |   |

]

**[SWS\_Csm\_01005]** [If no errors are detected by Csm, the service [Csm\\_KeyGenerate](#) shall call [CryIf\\_KeyGenerate](#).]

### 8.3.8.6 Key Derivation Interface

In cryptography, a key derivation function (or KDF) is a function, which derives one or more secret keys from a secret value and/or other known information such as a passphrase or cryptographic key.

Specification of input keys that are protected by hardware means can be achieved by using the [Csm\\_KeyDerive](#) interface.

#### [SWS\_Csm\_00956] Definition of API function Csm\_KeyDerive

Upstream requirements: [SRS\\_CryptoStack\\_00103](#)

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_KeyDerive   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyDerive (     uint32 keyId,     uint32 targetKeyId )</pre>  |  |
| <b>Service ID [hex]</b>   | 0x6b  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Reentrant, but not for same keyId   |  |
| <b>Parameters (in)</b>    | keyId   | Holds the identifier of the key which is used for key derivation.  |
|                           | targetKeyId   | Holds the identifier of the key which is used to store the derived key.  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Derives a new key by using the key elements in the given key identified by the keyId. The given key contains the key elements for the password and salt. The derived key is stored in the key element with the id 1 of the key identified by targetCryptoKeyId. |  |
| <b>Available via</b>      | Csm.h   |  |

[SWS\_Csm\_01018] [If no errors are detected by Csm, the service [Csm\\_KeyDerive](#) shall call [CryIf\\_KeyDerive](#).]

[SWS\_Csm\_01019] [If the number of iterations for the key derivation is needed by the Crypto Driver, it shall be stored in the key element [CRYPTO\\_KE\\_KEYDERIVATION\\_ITERATIONS](#).]

### 8.3.8.7 Key Exchange Interface

Two users that each have a private secret can use a key exchange protocol to obtain a common secret, e.g. a key for a symmetric-key algorithm, without telling each other their private secret and without any listener being able to obtain the common secret or their private secrets.

The functions `Csm_KeyExchangeCalcPubVal / Csm_JobKeyExchangeCalcPubVal` and `Csm_KeyExchangeCalcSecret / Csm_JobKeyExchangeCalcSecret` are used to support Diffie-Hellman (DH) key exchange.

This allows two partners, Alice and Bob, to generate private and public key material, to exchange public parts so that both parties can generate at the end a common shared secret. This shared secret can further be used, e.g. for symmetric data operation such as data encryption or MAC generation.

The public and private key material can either be based on prime based large number as it is used with RSA or on elliptic curve (so-called elliptic-curve diffie-hellman).

The CSM key exchange functions require a key with key elements according to [SWS\_Csm\_01022], in the line of Crypto Service "Key Exchange". The key elements `CRYPTO_KE_KEYEXCHANGE_BASE`, `CRYPTO_KE_KEYEXCHANGE_PRIVKEY` and `CRYPTO_KE_KEYEXCHANGE_OWNPUBKEY` are used to hold the public/private key material.

These values can either be pre-defined and set by `Csm_KeyElementSet` followed by `Csm_KeySetValid` or generated. For example, these key values can be generated by `Csm_KeyGenerate` and then copied with `Csm_KeyElementCopy` to the corresponding key elements, followed by a call to `Csm_KeySetValid`.

In a first step, Alice will call `Csm_KeyExchangeCalcPubVal / Csm_JobKeyExchangeCalcPubVal` and send the results to Bob (exchanged data may need to be signed and/or encrypted depending on the protocol).

It should be noted, that if `Csm_KeyExchangeCalcPubVal` is called but no valid key material exists (key is not valid or essential key elements have length=0), the function shall generate the necessary key material and continue as normal.

If needed, Bob will put received key material from Alice into the corresponding key elements. He will also call `Csm_KeyExchangeCalcPubVal` to generate his shared value that needs to be sent to Alice. Afterwards, Bob can call `Csm_KeyExchangeCalcSecret` to generate the common secret. This value will be placed into the key element `CRYPTO_KE_KEYEXCHANGE_SHAREDVALUE`.

When Alice receives the public value from Bob, it will call `Csm_KeyExchangeCalcSecret` and provides the value from Bob in the parameter of the function. The common shared secret will be generated by this function into the key element `CRYPTO_KE_KEYEXCHANGE_SHAREDVALUE`.

Depending on the algorithm, Bob needs to send key material to Alice to allow her to generate the common shared secret.

The key element `CRYPTO_KE_KEYEXCHANGE_ALGORITHM` specifies the Diffie-Hellman algorithm. The key element value is of type `Crypto_AlgorithmFamilyType`, for example `CRYPTO_ALGOFAM_DH` (for modulo based DH) or `CRYPTO_ALGOFAM_ED25519` (for ECDH(E)).

Additional elliptic curve parameter can be specified with the additional key element `CRYPTO_KE_KEYEXCHANGE_CURVETYPE`.

The other key elements have the following meaning:

|  | DH(E)          | ECDH(E)         |
|--|----------------|-----------------|
| <code>CRYPTO_KE_KEYEXCHANGE_BASE</code>      | Modulo         | Generator point |
| <code>CRYPTO_KE_KEYEXCHANGE_PRIVKEY</code>   | Local exponent | Private key     |
| <code>CRYPTO_KE_KEYEXCHANGE_OWNPUBKEY</code> | Generator      | Public key      |

### [SWS\_Csm\_00966] Definition of API function `Csm_KeyExchangeCalcPubVal`

Upstream requirements: [SRS\\_CryptoStack\\_00028](#)

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_KeyExchangeCalcPubVal  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyExchangeCalcPubVal (     uint32 keyId,     uint8* publicValuePtr,     uint32* publicValueLengthPtr )</pre>                      |   |
| <b>Service ID [hex]</b>   | 0x6c   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant but not for same keyId   |   |
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key which shall be used for the key exchange protocol.  |
| <b>Parameters (inout)</b> | publicValueLengthPtr   | Holds a pointer to the memory location in which the public value length information is stored. On calling this function, this parameter shall contain the size of the buffer provided by public ValuePtr. When the request has finished, the actual length of the returned value shall be stored. |
| <b>Parameters (out)</b>   | publicValuePtr   | Contains the pointer to the data where the public value shall be stored.  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element                     |
| <b>Description</b>        | Calculates the public value of the current user for the key exchange and stores the public key in the memory location pointed by the public value pointer. |   |
| <b>Available via</b>      | Csm.h  |   |

]

[SWS\_Csm\_01020] [If no errors are detected by Csm, the service `Csm_KeyExchangeCalcPubVal` shall call `CryIf_KeyExchangeCalcPubVal`.]

**[SWS\_Csm\_00967] Definition of API function Csm\_KeyExchangeCalcSecret**

 Upstream requirements: [SRS\\_CryptoStack\\_00028](#)

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_KeyExchangeCalcSecret  |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_KeyExchangeCalcSecret (     uint32 keyId,     const uint8* partnerPublicValuePtr,     uint32 partnerPublicValueLength )</pre>  |   |
| <b>Service ID [hex]</b>   | 0x6d   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant but not for same keyId   |   |
| <b>Parameters (in)</b>    | keyId  | Holds the identifier of the key which shall be used for the key exchange protocol.  |
|                           | partnerPublicValuePtr  | Holds the pointer to the memory location which contains the partner's public value.   |
|                           | partnerPublicValueLength   | Contains the length of the partner's public value in bytes.   |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Calculates the shared secret key for the key exchange with the key material of the key identified by the keyId and the partner public key. The shared secret key is stored as a key element in the same key. |   |
| <b>Available via</b>      | Csm.h  |   |

]

**[SWS\_Csm\_01006]** [If no errors are detected by Csm, the service [Csm\\_KeyExchangeCalcSecret](#) shall call [CryIf\\_KeyExchangeCalcSecret](#).]

### 8.3.9 Cryptographic Primitives and Schemes

**[SWS\_Csm\_91027] Definition of API function Csm\_JobKeySetValid** [

|                         |   |
|-------------------------|---|
| <b>Service Name</b>     | Csm_JobKeySetValid  |
| <b>Syntax</b>           | <pre>Std_ReturnType Csm_JobKeySetValid (     uint32 jobId )</pre> |
| <b>Service ID [hex]</b> | 0x7a  |
| <b>Sync/Async</b>       | Depends on configuration  |

▽



|                           |   |   |
|---------------------------|---|---|
| <b>Reentrancy</b>         | Reentrant   |   |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service.  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy |
| <b>Description</b>        | Stores the key if necessary and sets the key state of the key identified by keyId to valid. |   |
| <b>Available via</b>      | Csm.h   |   |

]

### [SWS\_Csm\_91002] Definition of API function Csm\_JobKeySetInvalid [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_JobKeySetInvalid   |   |
| <b>Syntax</b>             | Std_ReturnType Csm_JobKeySetInvalid (<br>uint32 jobId<br>)   |   |
| <b>Service ID [hex]</b>   | 0x84   |   |
| <b>Sync/Async</b>         | Depends on configuration   |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.  |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, Crypto Driver Object is busy |
| <b>Description</b>        | Sets the key status to invalid. The key cannot be used any longer for cryptographic operations until it has been set to valid state again. |   |
| <b>Available via</b>      | Csm.h  |   |

]

### [SWS\_Csm\_91028] Definition of API function Csm\_JobRandomSeed [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_JobRandomSeed  |  |
| <b>Syntax</b>             | Std_ReturnType Csm_JobRandomSeed (<br>uint32 jobId,<br>const uint8* seedPtr,<br>uint32 seedLength<br>) |  |
| <b>Service ID [hex]</b>   | 0x7b   |  |
| <b>Sync/Async</b>         | Depends on configuration   |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.                           |
|                           | seedPtr  | Holds a pointer to the memory location which contains the data to feed the seed. |
|                           | seedLength   | Contains the length of the seed in bytes.  |
| <b>Parameters (inout)</b> | None   |  |







|                         |   |  |
|-------------------------|---|--|
| <b>Parameters (out)</b> | None  |  |
| <b>Return value</b>     | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>      | Provides a new seed for the specified key that is used for an associated random number generator. |  |
| <b>Available via</b>    | Csm.h   |  |

]

### [SWS\_Csm\_91029] Definition of API function Csm\_JobKeyGenerate [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_JobKeyGenerate   |  |
| <b>Syntax</b>             | Std_ReturnType Csm_JobKeyGenerate ( uint32 jobId )                       |  |
| <b>Service ID [hex]</b>   | 0x7c   |  |
| <b>Sync/Async</b>         | Depends on configuration   |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.   |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Generates new key material and stores it in the key identified by jobId. |  |
| <b>Available via</b>      | Csm.h  |  |

]

### [SWS\_Csm\_91030] Definition of API function Csm\_JobKeyDerive [

|                         |  |   |
|-------------------------|--|---|
| <b>Service Name</b>     | Csm_JobKeyDerive   |   |
| <b>Syntax</b>           | Std_ReturnType Csm_JobKeyDerive ( uint32 jobId, uint32 targetKeyId ) |   |
| <b>Service ID [hex]</b> | 0x7d   |   |
| <b>Sync/Async</b>       | Depends on configuration   |   |
| <b>Reentrancy</b>       | Reentrant  |   |
| <b>Parameters (in)</b>  | jobId  | Holds the identifier of the job using the CSM service.                  |
|                         | targetKeyId  | Holds the identifier of the key which is used to store the derived key. |





|                           |   |   |
|---------------------------|---|---|
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Derives a new key by using the key elements in the given key identified by the keyId. The given key contains the key elements for the password and salt. The derived key is stored in the key element with the id 1 of the key identified by targetCryptoKeyId. |   |
| <b>Available via</b>      | Csm.h   |   |

]

### [SWS\_Csm\_91031] Definition of API function Csm\_JobKeyExchangeCalcPubVal

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_JobKeyExchangeCalcPubVal   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_JobKeyExchangeCalcPubVal (     uint32 jobId,     uint8* publicValuePtr,     uint32* publicValueLengthPtr )</pre>                   |   |
| <b>Service ID [hex]</b>   | 0x7e   |   |
| <b>Sync/Async</b>         | Depends on configuration   |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.  |
| <b>Parameters (inout)</b> | publicValueLengthPtr   | Holds a pointer to the memory location in which the public value length information is stored. On calling this function, this parameter shall contain the size of the buffer provided by public ValuePtr. When the request has finished, the actual length of the returned value shall be stored. |
| <b>Parameters (out)</b>   | publicValuePtr   | Contains the pointer to the data where the public value shall be stored.  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element                            |
| <b>Description</b>        | Calculates the public value of the current user for the key exchange and stores the public key in the memory location pointed by the public value pointer. |   |
| <b>Available via</b>      | Csm.h  |   |

]

**[SWS\_Csm\_91032] Definition of API function Csm\_JobKeyExchangeCalcSecret**

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_JobKeyExchangeCalcSecret   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_JobKeyExchangeCalcSecret (     uint32 jobId,     const uint8* partnerPublicValuePtr,     uint32 partnerPublicValueLength )</pre>   |  |
| <b>Service ID [hex]</b>   | 0x7f   |  |
| <b>Sync/Async</b>         | Depends on configuration   |  |
| <b>Reentrancy</b>         | Reentrant  |  |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.   |
|                           | partnerPublicValuePtr  | Holds the pointer to the memory location which contains the partner's public value.  |
|                           | partnerPublicValueLength   | Contains the length of the partner's public value in bytes.  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | None   |  |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element |
| <b>Description</b>        | Calculates the shared secret key for the key exchange with the key material of the key identified by the jobId and the partner public key. The shared secret key is stored as a key element in the same key. |  |
| <b>Available via</b>      | Csm.h  |  |

**[SWS\_Csm\_91115] Definition of API function Csm\_JobKeyWrap**

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_JobKeyWrap  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_JobKeyWrap (     uint32 jobId,     uint32 sourceKeyId,     uint8* ciphertextPtr,     uint32* ciphertextLengthPtr,     uint8* authenticatorPtr,     uint32* authenticatorLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x89  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job using the CSM service. |
|                           | sourceKeyId   | Holds the identifier of the key to be wrapped.         |
| <b>Parameters (inout)</b> | ciphertextLengthPtr   | Contains the length in bytes of the wrapped key.       |
|                           | authenticatorLengthPtr  | Contains the length in bytes of the authenticator.     |
| <b>Parameters (out)</b>   | ciphertextPtr   | References the data of the wrapped key.                |
|                           | authenticatorPtr  | References the data of the authenticator.              |





|                      |   |   |
|----------------------|---|---|
| <b>Return value</b>  | Std_ReturnType  | <p>E_OK: Request successful</p> <p>E_NOT_OK: Request failed</p> <p>CRYPTO_E_BUSY: Request failed, service is still busy</p> <p>CRYPTO_E_KEY_READ_FAIL: Request failed, not allowed to extract key element</p> <p>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"</p> <p>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible</p> <p>CRYPTO_E_KEY_EMPTY: Request failed because of uninitialized source key element</p> <p>CRYPTO_E_JOB_CANCELED: Request failed because the job has been canceled.</p> |
| <b>Description</b>   | Wraps the plaintext key given by sourceKeyld (in the key element with the id 1) with the key wrapping key associated with the jobld. The wrapped key will be written to ciphertextPtr. If the algorithm does provide an authenticator this will be written to authenticatorPtr. If the algorithm has no authenticator or the algorithm has an authenticator and no authentication shall be done, authenticatorLengthPtr shall be set to zero. |   |
| <b>Available via</b> | Csm.h   |   |

]

### [SWS\_Csm\_91111] Definition of API function Csm\_JobKeyUnwrap [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_JobKeyUnwrap  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_JobKeyUnwrap (     uint32 jobId,     uint32 targetKeyId,     const uint8* ciphertextPtr,     uint32 ciphertextLength,     const uint8* authenticatorPtr,     uint32 authenticatorLength,     Crypto_VerifyResultType* verifyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x8A  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobld   | Holds the identifier of the job using the CSM service.                     |
|                           | targetKeyld   | Holds the identifier of the slot where the plaintext key shall be written. |
|                           | ciphertextPtr   | References the data of the wrapped key.                                    |
|                           | ciphertextLength  | Contains the length in bytes of the wrapped key.                           |
|                           | authenticatorPtr  | References the data of the authenticator.                                  |
|                           | authenticatorLength   | Contains the length in bytes of the authenticator.                         |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | verifyPtr   | Contains the pointer to the result of the verification.                    |





|                      |   |   |
|----------------------|---|---|
| <b>Return value</b>  | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_KEY_WRITE_FAIL: Request failed, not allowed to write key element<br>CRYPTO_E_KEY_NOT_VALID: Request failed, the key's state is "invalid"<br>CRYPTO_E_KEY_SIZE_MISMATCH: Request failed, key element sizes are not compatible<br>CRYPTO_E_JOB_CANCELED: Request failed because the job has been canceled. |
| <b>Description</b>   | Unwraps the wrapped key given by the ciphertextPtr with the key wrapping key associated with the jobId. The unwrapped key will be written to targetKeyId in the element with the Id 1. If an authentication shall be done, the authenticator shall be referenced with authenticatorPtr. If the algorithm has no authenticator or the algorithm has an authenticator and no authentication shall be done, authenticatorLengthPtr shall be set to zero. If the algorithm has no authentication, verifyPtr will be set to CRYPTO_E_VER_OK. |   |
| <b>Available via</b> | Csm.h   |   |

### 8.3.10 Context Save and Restore

#### [SWS\_Csm\_91063] Definition of API function Csm\_SaveContextJob [

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_SaveContextJob   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_SaveContextJob (     uint32 jobId,     uint8* contextBufferPtr,     uint32* contextBufferLengthPtr )</pre> |   |
| <b>Service ID [hex]</b>   | 0x86   |   |
| <b>Sync/Async</b>         | Depends on configuration   |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | jobId  | Holds the identifier of the job using the CSM service.  |
| <b>Parameters (inout)</b> | contextBufferLengthPtr   | Pointer to the buffer, where the length value is located. As input data it provides the maximum length of data available in context BufferPtr. As output data it provides the actual length of data located in contextBufferPtr (or 0 in case of a failure) |
| <b>Parameters (out)</b>   | contextBufferPtr   | Pointer to the buffer in the application where the context data shall be stored to.   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Context data successfully provided.<br>E_NOT_OK: Context data could not be provided; values are not valid.<br>CRYPTO_E_BUSY: Request failed, service is still busy  |
| <b>Description</b>        | The Crypto Driver stores the internal context of the respective crypto operation to the context Buffer.                            |   |
| <b>Available via</b>      | Csm.h  |   |

[SWS\_Csm\_91067] [If Csm\_SaveContextJob is called and the job is active, CSM shall put contextBufferPtr to

job.PrimitiveInputOutput.outputPtr and contextOutputLengthPtr into job.PrimitiveInputOutput.outputLengthPtr, set job->jobPrimitiveInputOutput->mode to `CRYPTO_OPERATIONMODE_SAVE_CONTEXT` and call `CryIf_ProcessJob` with the corresponding channelId of this job and a pointer to the job itself. Any return value from this function call shall be provided back to the application.]

**[SWS\_Csm\_91064] Definition of API function Csm\_RestoreContextJob [**

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_RestoreContextJob   |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_RestoreContextJob (     uint32 jobId,     const uint8* contextBufferPtr,     uint32 contextBufferLength )</pre>   |  |
| <b>Service ID [hex]</b>   | 0x87  |  |
| <b>Sync/Async</b>         | Depends on configuration  |  |
| <b>Reentrancy</b>         | Reentrant   |  |
| <b>Parameters (in)</b>    | jobId   | Holds the identifier of the job where context shall be requested from.   |
|                           | contextBufferPtr  | Pointer to the buffer, where the context data are located that shall be restored.  |
|                           | contextBufferLength   | Provides the length of context data that are located in context BufferPtr.   |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | None  |  |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Context data successfully restored.<br>E_NOT_OK: Context data could not be restored.<br>CRYPTO_E_BUSY: Request failed, service is still busy |
| <b>Description</b>        | The Crypto Driver extracts the context data from the contextBuffer and restores the internal state so that further crypto operation of this crypto service will continue at the exact point when the context was taken. |  |
| <b>Available via</b>      | Csm.h   |  |

]

**[SWS\_Csm\_91068]** [If `Csm_RestoreContextJob` is called and the job is active, CSM shall put `contextBufferPtr` into `job.PrimitiveInputOutput.inputPtr` and `contextBufferLength` into `job.PrimitiveInputOutput.inputLength`, set `job->jobPrimitiveInputOutput->mode` to `CRYPTO_OPERATIONMODE_RESTORE_CONTEXT` and call `CryIf_ProcessJob` with the corresponding channelId of this job and a pointer to the job itself. Any return value from this function call shall be provided back to the application.]

### 8.3.11 Job Cancellation Interface

#### [SWS\_Csm\_00968] Definition of API function Csm\_CancelJob [

|                           |   |   |
|---------------------------|---|---|
| <b>Service Name</b>       | Csm_CancelJob   |   |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_CancelJob (     uint32 job,     Crypto_OperationModeType mode )</pre> |   |
| <b>Service ID [hex]</b>   | 0x6f  |   |
| <b>Sync/Async</b>         | Synchronous   |   |
| <b>Reentrancy</b>         | Non Reentrant   |   |
| <b>Parameters (in)</b>    | job   | Holds the identifier of the job to be canceled  |
|                           | mode  | Not used, just for interface compatibility provided.  |
| <b>Parameters (inout)</b> | None  |   |
| <b>Parameters (out)</b>   | None  |   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful. Job removed from any queue and potentially from crypto driver hardware.<br>E_NOT_OK: Request failed<br>CRYPTO_E_JOB_CANCELED: Immediate cancelation not possible. The cancelation will be done at next suitable processing step and notified via a negative job's closing callback. |
| <b>Description</b>        | Cancels the job processing from asynchronous or streaming jobs.                               |   |
| <b>Available via</b>      | Csm.h   |   |

]

**[SWS\_Csm\_01086]** [If development error detection for the CSM is enabled: The function `Csm_CancelJob` shall raise the error `CSM_E_PROCESSING_MODE` and return `E_NOT_OK` if the `Csm_CancelJob` is called for a synchronous job.]

**[SWS\_Csm\_01021]** [The Csm shall remove the job from its own queue or call `CryIf_CancelJob` to cancel a potential job in the driver.]

**[SWS\_Csm\_01030]** [In case the `CryIf_CancelJob` returns `E_OK`, the job's closing callback `CallbackNotification` shall be called with a result value of `CRYPTO_E_JOB_CANCELED`.]

**[SWS\_Csm\_01087]** [In case the `CryIf_CancelJob` returns `CRYPTO_E_JOB_CANCELED` (i.e. the job was not instantly canceled) the CSM shall postpone the call of the job's closing callback until the next call of `Csm_CallbackNotification`. The result of the job's closing callback shall be `CRYPTO_E_JOB_CANCELED`.]

**Note:** In case the crypto driver does not support an instant cancelation of the job, the application need to wait for the job's closing callback to free the buffers. The crypto driver could potentially still write to the output buffer(s).

## 8.3.12 Custom Interface

### 8.3.12.1 Custom Service Interface

Security related services that are not supported by the existing CSM service interfaces can be realized by the custom service. The purpose of this service is not specified and can be customized by a vendor. It is recommended to align the settings of a particular custom service in a Crypto Driver profile (see SWS Crypto Driver [4], Chapter 7.5.2).

#### [SWS\_Csm\_91107] Definition of API function Csm\_CustomService [

|                           |  |  |
|---------------------------|--|--|
| <b>Service Name</b>       | Csm_CustomService  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_CustomService (     uint32 jobId,     Crypto_OperationModeType mode,     uint32 targetKeyId,     const uint8* inputPtr,     uint32 inputLength,     const uint8* secondaryInputPtr,     uint32 secondaryInputLength,     const uint8* tertiaryInputPtr,     uint32 tertiaryInputLength,     uint8* outputPtr,     uint32* outputLengthPtr,     uint8* secondaryOutputPtr,     uint32* secondaryOutputLengthPtr,     Crypto_VerifyResultType* verifyPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x13   |  |
| <b>Sync/Async</b>         | Depends on configuration   |  |
| <b>Reentrancy</b>         | Reentrant for different jobId  |  |
| <b>Parameters (in)</b>    | jobId  | ID of the job which is dispatched for custom processing  |
|                           | mode   | Indicates which operation mode(s) to perform for the custom Job  |
|                           | targetKeyId  | Holds the target key id for the custom job   |
|                           | inputPtr   | Pointer to the input data.   |
|                           | inputLength  | Contains the input length in bytes.  |
|                           | secondaryInputPtr  | Pointer to the secondary input data.   |
|                           | secondaryInputLength   | Contains the secondary input length in bytes.  |
|                           | tertiaryInputPtr   | Pointer to the tertiary input data.  |
| tertiaryInputLength       | Contains the tertiary input length in bytes.   |  |
| <b>Parameters (inout)</b> | None   |  |
| <b>Parameters (out)</b>   | outputPtr  | Pointer to the output data.  |
|                           | outputLengthPtr  | Contains the output length in bytes.   |
|                           | secondaryOutputPtr   | Pointer to the secondary output data.  |
|                           | secondaryOutputLengthPtr   | Contains the secondary output length in bytes.   |
|                           | verifyPtr  | Pointer to the verification result   |
| <b>Return value</b>       | Std_ReturnType   | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: Request failed, service is still busy<br>CRYPTO_E_CUSTOM_ERROR: Custom processing failed. |







|                      |   |
|----------------------|---|
| <b>Description</b>   | Dispatches security related jobs for custom execution in a secure environment |
| <b>Available via</b> | Csm.h   |

### 8.3.12.2 Custom Sync Interface

#### [SWS\_Csm\_91108] Definition of API function Csm\_CustomSync [

|                           |   |  |
|---------------------------|---|--|
| <b>Service Name</b>       | Csm_CustomSync  |  |
| <b>Syntax</b>             | <pre>Std_ReturnType Csm_CustomSync (     uint32 dispatchId,     uint32 keyId,     uint32 keyElementId,     uint32 targetKeyId,     uint32 targetKeyElementId,     const uint8* inputPtr,     uint32 inputLength,     uint8* outputPtr,     uint32* outputLengthPtr,     uint8* secondaryOutputPtr,     uint32* secondaryOutputLengthPtr )</pre> |  |
| <b>Service ID [hex]</b>   | 0x88  |  |
| <b>Sync/Async</b>         | Synchronous   |  |
| <b>Reentrancy</b>         | Non Reentrant   |  |
| <b>Parameters (in)</b>    | dispatchId  | unique id to identify the request  |
|                           | keyId   | key Id of the key the certificate is stored  |
|                           | keyElementId  | key element id   |
|                           | targetKeyId   | Holds the target key id  |
|                           | targetKeyElementId  | –  |
|                           | inputPtr  | Pointer to the input data.   |
|                           | inputLength   | Contains the input length in bytes.  |
| <b>Parameters (inout)</b> | None  |  |
| <b>Parameters (out)</b>   | outputPtr   | Pointer to the output data.  |
|                           | outputLengthPtr   | Contains the output length in bytes.   |
|                           | secondaryOutputPtr  | Pointer to the secondary output data.  |
|                           | secondaryOutputLengthPtr  | Contains the secondary output length in bytes.   |
| <b>Return value</b>       | Std_ReturnType  | E_OK: Request successful<br>E_NOT_OK: Request failed<br>CRYPTO_E_BUSY: The service request failed because the service is still busy<br>CRYPTO_E_CUSTOM_ERROR: Custom processing failed |
| <b>Description</b>        | Requests the execution of a function that is specified by the given dispatch id.  |  |
| <b>Available via</b>      | Csm.h   |  |

[SWS\_Csm\_91110] [If no errors are detected by Csm, the service `Csm_CustomSync` shall call `CryIf_CustomSync`.]

## 8.4 Callback notifications

This is a list of functions provided for other modules.

### [SWS\_Csm\_00970] Definition of API function `Csm_CallbackNotification`

*Upstream requirements:* [SRS\\_BSW\\_00359](#), [SRS\\_BSW\\_00360](#)

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | Csm_CallbackNotification   |   |
| <b>Syntax</b>             | <pre>void Csm_CallbackNotification (     Crypto_JobType* job,     Crypto_ResultType result )</pre> |   |
| <b>Service ID [hex]</b>   | 0x70   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | job  | Holds a pointer to the job, which has finished.     |
|                           | result   | Contains the result of the cryptographic operation. |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | None   |   |
| <b>Description</b>        | Notifies the CSM that a job has finished. This function is used by the underlying layer (CRYIF).   |   |
| <b>Available via</b>      | Csm.h  |   |

]

[SWS\_Csm\_01044] [If the `CRYPTO_OPERATIONMODE_FINISH` bit is set in `job->jobPrimitiveInputOutput.mode`, the `Csm_CallbackNotification` shall call the configured callback function.]

[SWS\_Csm\_91017] [If the `CRYPTO_OPERATIONMODE_FINISH` bit is set in `job->jobPrimitiveInputOutput.mode` and `CsmProcessingMode` is set to `CRYPTO_PROCESSING_ASYNC` and `CsmJobInterfaceUsePort` is set to `CRYPTO_USE_PORT_OPTIMIZED`, the CSM shall trigger `CallbackNotification` service.]

## 8.5 Scheduled functions

These functions are directly called by Basic Software Scheduler. The following functions shall have no return value and no parameter. All functions shall be non reentrant.

### [SWS\_Csm\_00479] Definition of scheduled function Csm\_MainFunction

Upstream requirements: [SRS\\_BSW\\_00373](#), [SRS\\_BSW\\_00432](#)

[

|                         |   |
|-------------------------|---|
| <b>Service Name</b>     | Csm_MainFunction  |
| <b>Syntax</b>           | void Csm_MainFunction (<br>void<br>)  |
| <b>Service ID [hex]</b> | 0x01  |
| <b>Description</b>      | API to be called cyclically to process the requested jobs. The Csm_MainFunction shall check the queues for jobs to pass to the underlying CRYIF. Per configured CsmMainFunction instance one Csm_MainFunction_<shortName> shall be implemented. Hereby <shortName> is the short name of the CsmMainFunction configuration container in the ECU configuration. |
| <b>Available via</b>    | SchM_Csm.h  |

]

## 8.6 Expected interfaces

In this chapter all interfaces required from other modules are listed.

### 8.6.1 Mandatory interfaces

**Note:** This section defines all interfaces, which are required to fulfill the core functionality of the module.

### [SWS\_Csm\_91100] Definition of mandatory interfaces required by module Csm

[

| API Function                | Header File | Description   |
|-----------------------------|-------------|---|
| Crylf_CancelJob             | Crylf.h     | This interface dispatches the job cancellation function to the configured crypto driver object.   |
| Crylf_KeyCopy               | Crylf.h     | This function shall copy all key elements from the source key to a target key.  |
| Crylf_KeyElementCopy        | Crylf.h     | This function shall copy a key elements from one key to a target key.   |
| Crylf_KeyElementCopyPartial | Crylf.h     | Copies a key element to another key element. The keyElementOffsets and keyElementCopyLength allows to copy just parts of the source key element into the destination key element. |
| Crylf_KeyElementGet         | Crylf.h     | This function shall dispatch the get key element function to the configured crypto driver object.   |
| Crylf_KeyElementSet         | Crylf.h     | This function shall dispatch the set key element function to the configured crypto driver object.   |

▽



| <i>API Function</i>         | <i>Header File</i> | <i>Description</i>  |
|-----------------------------|--------------------|---|
| Crylf_KeyExchangeCalcSecret | Crylf.h            | This function shall dispatch the key exchange common shared secret calculation function to the configured crypto driver object. |
| Crylf_KeyGenerate           | Crylf.h            | This function shall dispatch the key generate function to the configured crypto driver object.                                  |
| Crylf_KeySetValid           | Crylf.h            | This function shall dispatch the set key valid function to the configured crypto driver object.                                 |
| Crylf_ProcessJob            | Crylf.h            | This interface dispatches the received jobs to the configured crypto driver object.   |
| Crylf_RandomSeed            | Crylf.h            | This function shall dispatch the random seed function to the configured crypto driver object.                                   |
| Det_ReportRuntimeError      | Det.h              | Service to report runtime errors. If a callout has been configured then this callout shall be called.                           |

]

### 8.6.2 Optional interfaces

This section defines all interfaces, which are required to fulfill an optional functionality of the module.

#### [SWS\_Csm\_91101] Definition of optional interfaces requested by module Csm [

| <i>API Function</i> | <i>Header File</i> | <i>Description</i>                    |
|---------------------|--------------------|---------------------------------------|
| Det_ReportError     | Det.h              | Service to report development errors. |

]

### 8.6.3 Configurable interfaces

In this section, all interfaces are listed where the target function could be configured. The target function is usually a callback function. The names of this kind of interfaces are not fixed because they are configurable.

## [SWS\_Csm\_00971] Definition of configurable interface <Csm\_ApplicationCallbackNotification>

Upstream requirements: [SRS\\_BSW\\_00359](#), [SRS\\_BSW\\_00360](#)

[

|                           |  |   |
|---------------------------|--|---|
| <b>Service Name</b>       | <Csm_ApplicationCallbackNotification>  |   |
| <b>Syntax</b>             | <pre>void &lt;Csm_ApplicationCallbackNotification&gt; (     uint32 jobId,     Crypto_ResultType result )</pre>   |   |
| <b>Sync/Async</b>         | Synchronous  |   |
| <b>Reentrancy</b>         | Reentrant  |   |
| <b>Parameters (in)</b>    | jobId  | JobID of the operation that caused the callback     |
|                           | result   | Contains the result of the cryptographic operation. |
| <b>Parameters (inout)</b> | None   |   |
| <b>Parameters (out)</b>   | None   |   |
| <b>Return value</b>       | None   |   |
| <b>Description</b>        | CSM notifies the application that a job has finished. The function name is configurable. The function name itself is derived from "{CsmJob/CsmJobPrimitiveCallbackRef}/CsmCallbackFunc". |   |
| <b>Available via</b>      | Csm.h  |   |

]

[SWS\_Csm\_01090] [[<Csm\\_ApplicationCallbackNotification>](#) shall be called once at the end when an asynchronous job's call has been finished, i.e. the given operation mode has been completely processed, the job has been aborted due to an error or the the job has been cancelled. Thus, if a job's call processed multiple operation modes, i.e. [CRYPTO\\_OPERATIONMODE\\_STREAMSTART](#) or [CRYPTO\\_OPERATIONMODE\\_SINGLECALL](#), [<Csm\\_ApplicationCallbackNotification>](#) is called only once.]

[SWS\_Csm\_01095] [The CSM shall call the application callback function if the following condition is met:  $(\{ecuc(Csm/CsmJobs/CsmJob.CsmProcessingMode)\} == CRYPTO\_PROCESSING\_ASYN) \ \&\& \ (CsmJob/CsmJobInterfaceUsePort == CRYPTO\_USE\_FNC) \ \&\& \ (CsmJob/CsmJobPrimitiveCallbackRef \neq 0)$

For the service interface the callback service shall be called if the asynchronous processing is configured:  $(\{ecuc(Csm/CsmJobs/CsmJob.CsmProcessingMode)\} == CRYPTO\_PROCESSING\_ASYN) \ \&\& \ (CsmJob/CsmJobInterfaceUsePort \neq CRYPTO\_USE\_FNC)$  ]

## 8.7 Service Interfaces

This chapter is an addition to the specification of the Csm module. Whereas the other parts of the specification define the behavior and the C-interfaces of the corresponding

basic software module, this chapter formally specifies the corresponding AUTOSAR service in terms of the SWC template. The interfaces described here will be visible on the VFB and are used to generate the RTE between application software and the Csm module.

### 8.7.1 Client-Server-Interfaces

#### [SWS\_Csm\_01905] Definition of ClientServerInterface CsmKeyManagement\_{Key}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmKeyManagement_{Key}  |                            |   |
| <b>Comment</b>         | Interface to execute the key management functions.  |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | ({ecuc(Csm/CsmKeys/CsmKey.CsmKeyUsePort)} == TRUE)<br>Key = {ecuc(Csm/CsmKeys/CsmKey.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 6   | CRYPTO_E_KEY_READ_FAIL     | The service request failed because read access was denied.  |
|                        | 7   | CRYPTO_E_KEY_WRITE_FAIL    | The service request failed because write access was denied.   |
|                        | 8   | CRYPTO_E_KEY_NOT_AVAILABLE | The service request failed because the key is not available.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |  |   |
|----------------------|--|---|
| <b>Operation</b>     | KeyCopy  |   |
| <b>Comment</b>       | This function shall copy all key elements from the source key to a target key. |   |
| <b>Mapped to API</b> | <a href="#">Csm_KeyCopy</a>  |   |
| <b>Variation</b>     | -  |   |
| <b>Parameters</b>    | targetKeyId  |   |
|                      | <b>Type</b>  | uint32  |
|                      | <b>Direction</b>   | IN  |
|                      | <b>Comment</b>   | Holds the identifier of the key whose key element shall be the destination element. |
|                      | <b>Variation</b>   | -   |

▽



|                        |  |
|------------------------|--|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_WRITE_FAIL<br>CRYPTO_E_KEY_NOT_AVAILABLE<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |
|------------------------|--|

|                        |  |             |  |             |        |                  |    |                |   |                  |   |
|------------------------|--|-------------|--|-------------|--------|------------------|----|----------------|---|------------------|---|
| <b>Operation</b>       | KeyDerive  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Comment</b>         | Derives a new key by using the key elements in the given key. The given key contains the key elements for the password and salt. The derived key is stored in the key element with the id 1 of the key identified by targetCryptoKeyId.  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Mapped to API</b>   | Csm_KeyDerive  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Variation</b>       | –  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Parameters</b>      | <table border="1"> <tr> <td colspan="2">targetKeyId</td> </tr> <tr> <td><b>Type</b></td> <td>uint32</td> </tr> <tr> <td><b>Direction</b></td> <td>IN</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the identifier of the key which is used to store the derived key.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> </table> | targetKeyId |  | <b>Type</b> | uint32 | <b>Direction</b> | IN | <b>Comment</b> | Holds the identifier of the key which is used to store the derived key. | <b>Variation</b> | – |
| targetKeyId            |  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Type</b>            | uint32   |             |  |             |        |                  |    |                |   |                  |   |
| <b>Direction</b>       | IN   |             |  |             |        |                  |    |                |   |                  |   |
| <b>Comment</b>         | Holds the identifier of the key which is used to store the derived key.  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Variation</b>       | –  |             |  |             |        |                  |    |                |   |                  |   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_WRITE_FAIL<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY   |             |  |             |        |                  |    |                |   |                  |   |

|                      |   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
|----------------------|---|--------------|--|-------------|--------|------------------|----|----------------|---|------------------|---|-------------|--|-------------|--------|------------------|----|----------------|---|------------------|---|--------------------|--|-------------|--------|------------------|----|----------------|--|------------------|---|
| <b>Operation</b>     | KeyElementCopy  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Comment</b>       | This function shall copy a key elements from one key to a target key  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Mapped to API</b> | Csm_KeyElementCopy  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Variation</b>     | –   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Parameters</b>    | <table border="1"> <tr> <td colspan="2">keyElementId</td> </tr> <tr> <td><b>Type</b></td> <td>uint32</td> </tr> <tr> <td><b>Direction</b></td> <td>IN</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the identifier of the key element which shall be the source for the copy operation.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> <tr> <td colspan="2">targetKeyId</td> </tr> <tr> <td><b>Type</b></td> <td>uint32</td> </tr> <tr> <td><b>Direction</b></td> <td>IN</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the identifier of the key whose key element shall be the destination element.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> <tr> <td colspan="2">targetKeyElementId</td> </tr> <tr> <td><b>Type</b></td> <td>uint32</td> </tr> <tr> <td><b>Direction</b></td> <td>IN</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the identifier of the key element which shall be the destination for the copy operation.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> </table> | keyElementId |  | <b>Type</b> | uint32 | <b>Direction</b> | IN | <b>Comment</b> | Holds the identifier of the key element which shall be the source for the copy operation. | <b>Variation</b> | – | targetKeyId |  | <b>Type</b> | uint32 | <b>Direction</b> | IN | <b>Comment</b> | Holds the identifier of the key whose key element shall be the destination element. | <b>Variation</b> | – | targetKeyElementId |  | <b>Type</b> | uint32 | <b>Direction</b> | IN | <b>Comment</b> | Holds the identifier of the key element which shall be the destination for the copy operation. | <b>Variation</b> | – |
| keyElementId         |   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Type</b>          | uint32  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Direction</b>     | IN  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Comment</b>       | Holds the identifier of the key element which shall be the source for the copy operation.   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Variation</b>     | –   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| targetKeyId          |   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Type</b>          | uint32  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Direction</b>     | IN  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Comment</b>       | Holds the identifier of the key whose key element shall be the destination element.   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Variation</b>     | –   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| targetKeyElementId   |   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Type</b>          | uint32  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Direction</b>     | IN  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Comment</b>       | Holds the identifier of the key element which shall be the destination for the copy operation.  |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |
| <b>Variation</b>     | –   |              |  |             |        |                  |    |                |   |                  |   |             |  |             |        |                  |    |                |   |                  |   |                    |  |             |        |                  |    |                |  |                  |   |





|                        |  |
|------------------------|--|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_WRITE_FAIL<br>CRYPTO_E_KEY_NOT_AVAILABLE<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |
|------------------------|--|

|                      |   |   |
|----------------------|---|---|
| <b>Operation</b>     | KeyElementCopyPartial   |   |
| <b>Comment</b>       | This function shall copy parts of a key elements from one key to parts of a target key element of a target key. |   |
| <b>Mapped to API</b> | Csm_KeyElementCopyPartial   |   |
| <b>Variation</b>     | –   |   |
| <b>Parameters</b>    | keyElementId  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | Holds the identifier of the key element which shall be the source for the copy operation.           |
|                      | <b>Variation</b>  | –   |
|                      | keyElementSourceOffset  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | This is the offset of the source key element indicating the start index of the copy operation.      |
|                      | <b>Variation</b>  | –   |
|                      | keyElementTargetOffset  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | This is the offset of the destination key element indicating the start index of the copy operation. |
|                      | <b>Variation</b>  | –   |
|                      | keyElementCopyLength  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | Specifies the number of bytes that shall be copied.   |
|                      | <b>Variation</b>  | –   |
| targetKeyId          |   |   |
| <b>Type</b>          | uint32  |   |
| <b>Direction</b>     | IN  |   |
| <b>Comment</b>       | Holds the identifier of the key whose key element shall be the destination element.                             |   |
| <b>Variation</b>     | –   |   |
| targetKeyElementId   |   |   |
| <b>Type</b>          | uint32  |   |
| <b>Direction</b>     | IN  |   |
| <b>Comment</b>       | Holds the identifier of the key element which shall be the destination for the copy operation.                  |   |
| <b>Variation</b>     | –   |   |







|                        |  |
|------------------------|--|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_WRITE_FAIL<br>CRYPTO_E_KEY_NOT_AVAILABLE<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |
|------------------------|--|

|                        |   |  |
|------------------------|---|--|
| <b>Operation</b>       | KeyElementGet   |  |
| <b>Comment</b>         | Retrieves the key element bytes from a specific key element of the key and stores the key element in the provided buffer. |  |
| <b>Mapped to API</b>   | Csm_KeyElementGet   |  |
| <b>Variation</b>       | –   |  |
| <b>Parameters</b>      | keyElementId  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Holds the identifier of the key element to be read.    |
|                        | <b>Variation</b>  | –  |
|                        | keyElement  |  |
|                        | <b>Type</b>   | Csm_KeyDataType_{Crypto}                               |
|                        | <b>Direction</b>  | OUT  |
|                        | <b>Comment</b>  | Holds the data to the key element bytes to be written. |
|                        | <b>Variation</b>  | –  |
|                        | keyElementLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | INOUT  |
| <b>Comment</b>         | Contains the number of key element bytes.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_NOT_AVAILABLE<br>CRYPTO_E_KEY_EMPTY           |  |

|                      |  |  |
|----------------------|--|--|
| <b>Operation</b>     | KeyElementSet                                |  |
| <b>Comment</b>       | Sets the given key element bytes to the key. |  |
| <b>Mapped to API</b> | Csm_KeyElementSet                            |  |
| <b>Variation</b>     | –  |  |
| <b>Parameters</b>    | keyElementId                                 |  |
|                      | <b>Type</b>                                  | uint32   |
|                      | <b>Direction</b>                             | IN   |
|                      | <b>Comment</b>                               | Holds the identifier of the key element to be written.   |
|                      | <b>Variation</b>                             | –  |
|                      | keyElement                                   |  |
|                      | <b>Type</b>                                  | Csm_KeyDataType_{Crypto}                                 |
|                      | <b>Direction</b>                             | IN   |
|                      | <b>Comment</b>                               | Holds the data to the key element bytes to be processed. |
|                      | <b>Variation</b>                             | –  |





|                        |  |
|------------------------|--|
|                        | keyElementLength   |
|                        | <b>Type</b> uint32   |
|                        | <b>Direction</b> IN  |
|                        | <b>Comment</b> Contains the number of key element bytes.   |
|                        | <b>Variation</b> –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_WRITE_FAIL</a><br><a href="#">CRYPTO_E_KEY_NOT_AVAILABLE</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a> |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | KeyExchangeCalcPubVal   |
| <b>Comment</b>         | Calculates the public value of the current user for the key exchange and stores the public key in the provided buffer   |
| <b>Mapped to API</b>   | <a href="#">Csm_KeyExchangeCalcPubVal</a>   |
| <b>Variation</b>       | –   |
| <b>Parameters</b>      | publicValue   |
|                        | <b>Type</b> <a href="#">Csm_KeyDataType_{Crypto}</a>  |
|                        | <b>Direction</b> OUT  |
|                        | <b>Comment</b> Contains the pointer to the memory location where the public value shall be stored.  |
|                        | <b>Variation</b> –  |
|                        | publicValueLength   |
|                        | <b>Type</b> uint32  |
|                        | <b>Comment</b> Holds a pointer to the memory location in which the public value length in bytes is stored. On calling this function, this parameter shall contain the size of the buffer in bytes provided by publicValuePtr. When the request has finished, the actual length of the returned value shall be stored. |
| <b>Variation</b> –     |   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a>   |

|                      |  |
|----------------------|--|
| <b>Operation</b>     | KeyExchangeCalcSecret  |
| <b>Comment</b>       | Calculates the shared secret key for the key exchange with the key material of the key identified by the keyId and the partner public key. The shared secret key is stored as a key element in the same key. |
| <b>Mapped to API</b> | <a href="#">Csm_KeyExchangeCalcSecret</a>  |
| <b>Variation</b>     | –  |
| <b>Parameters</b>    | partnerPublicValue   |
|                      | <b>Type</b> <a href="#">Csm_KeyDataType_{Crypto}</a>   |
|                      | <b>Direction</b> IN  |
|                      | <b>Comment</b> Holds the pointer to the memory location containing the partner's public value  |
|                      | <b>Variation</b> –   |
|                      | partnerPublicValueLength   |
|                      | <b>Type</b> uint32   |
|                      | <b>Direction</b> IN  |





|                        |   |  |
|------------------------|---|--|
|                        | <b>Comment</b>  | Contains the number of bytes of the partner public value |
|                        | <b>Variation</b>  | –  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_EMPTY |  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | KeyGenerate   |
| <b>Comment</b>         | Generates new key material and store it in the key identified by keyId.           |
| <b>Mapped to API</b>   | <a href="#">Csm_KeyGenerate</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_EMPTY |

|                        |  |              |  |             |                                      |                  |     |                |   |                  |   |
|------------------------|--|--------------|--|-------------|--------------------------------------|------------------|-----|----------------|---|------------------|---|
| <b>Operation</b>       | KeyGetStatus   |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Comment</b>         | Returns the key state of the key identified by keyId.  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Mapped to API</b>   | <a href="#">Csm_KeyGetStatus</a>   |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Variation</b>       | –  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Parameters</b>      | <table border="1"> <tr> <td colspan="2">keyStatusPtr</td> </tr> <tr> <td><b>Type</b></td> <td><a href="#">Crypto_KeyStatusType</a></td> </tr> <tr> <td><b>Direction</b></td> <td>OUT</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the status of the key referenced by the port.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> </table> | keyStatusPtr |  | <b>Type</b> | <a href="#">Crypto_KeyStatusType</a> | <b>Direction</b> | OUT | <b>Comment</b> | Holds the status of the key referenced by the port. | <b>Variation</b> | – |
| keyStatusPtr           |  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Type</b>            | <a href="#">Crypto_KeyStatusType</a>   |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Direction</b>       | OUT  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Comment</b>         | Holds the status of the key referenced by the port.  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Variation</b>       | –  |              |  |             |                                      |                  |     |                |   |                  |   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK   |              |  |             |                                      |                  |     |                |   |                  |   |

|                        |  |
|------------------------|--|
| <b>Operation</b>       | KeySetInvalid                                      |
| <b>Comment</b>         | Operation to set the status of the key to invalid. |
| <b>Mapped to API</b>   | <a href="#">Csm_KeySetInvalid</a>                  |
| <b>Variation</b>       | –  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY                  |

|                        |  |
|------------------------|--|
| <b>Operation</b>       | KeySetValid                                  |
| <b>Comment</b>         | Sets the given key element bytes to the key. |
| <b>Mapped to API</b>   | <a href="#">Csm_KeySetValid</a>              |
| <b>Variation</b>       | –  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY            |

|                      |   |
|----------------------|---|
| <b>Operation</b>     | RandomSeed  |
| <b>Comment</b>       | Feeds the key element CRYPTO_KE_RANDOM_SEED with a random seed. |
| <b>Mapped to API</b> | <a href="#">Csm_RandomSeed</a>                                  |
| <b>Variation</b>     | –   |





|                        |   |  |
|------------------------|---|--|
| <b>Parameters</b>      | seed  |  |
|                        | <b>Type</b>   | <a href="#">Csm_KeyDataType_{Crypto}</a>                               |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Holds the data which shall be used for the random seed initialization. |
|                        | <b>Variation</b>  | –  |
|                        | seedLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length of the seed in bytes.                              |
|                        | <b>Variation</b>  | –  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |

]

### [SWS\_Csm\_00946] Definition of ClientServerInterface CsmHash\_{PrimitiveCfg}

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |               |  |
|------------------------|---|---------------|--|
| <b>Name</b>            | CsmHash_{PrimitiveCfg}  |               |  |
| <b>Comment</b>         | Synchronous processing interface to execute the hash calculation.   |               |  |
| <b>IsService</b>       | true  |               |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |               |  |
| <b>Possible Errors</b> | 0   | E_OK          | Operation successful                   |
|                        | 1   | E_NOT_OK      | Operation failed                       |
|                        | 2   | CRYPTO_E_BUSY | Request failed, service is still busy. |

|                      |   |  |
|----------------------|---|--|
| <b>Operation</b>     | Hash  |  |
| <b>Comment</b>       | Streaming approach of the hash calculation. |  |
| <b>Mapped to API</b> | <a href="#">Csm_Hash</a>                    |  |
| <b>Variation</b>     | –   |  |
| <b>Parameters</b>    | data  |  |
|                      | <b>Type</b>                                 | <a href="#">Csm_HashDataType_{Crypto}</a>              |
|                      | <b>Direction</b>                            | IN   |
|                      | <b>Comment</b>                              | Contains the data to be hashed.                        |
|                      | <b>Variation</b>                            | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}           |
|                      | dataLength                                  |  |
|                      | <b>Type</b>                                 | uint32   |
|                      | <b>Direction</b>                            | IN   |
|                      | <b>Comment</b>                              | Contains the length in bytes of the data to be hashed. |
|                      | <b>Variation</b>                            | –  |
| result               |   |  |





|                        |                                   |  |
|------------------------|-----------------------------------|--|
|                        | <b>Type</b>                       | Csm_HashResultType_{Crypto}                  |
|                        | <b>Direction</b>                  | OUT  |
|                        | <b>Comment</b>                    | Contains the data of the hash.               |
|                        | <b>Variation</b>                  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME} |
|                        | resultLength                      |  |
|                        | <b>Type</b>                       | uint32                                       |
|                        | <b>Direction</b>                  | INOUT  |
|                        | <b>Comment</b>                    | Contains the length in bytes of the hash.    |
| <b>Variation</b>       | –                                 |  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY |  |

]

### [SWS\_Csm\_09000] Definition of ClientServerInterface CsmMacGenerate\_{PrimitiveCfg}

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmMacGenerate_{PrimitiveCfg}  |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the MAC generation.  |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive})/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |  |   |
|----------------------|--|---|
| <b>Operation</b>     | MacGenerate  |   |
| <b>Comment</b>       | Uses the given data to perform a MAC generation and stores the MAC in the memory location pointed to by the MAC pointer. |   |
| <b>Mapped to API</b> | <a href="#">Csm_MacGenerate</a>  |   |
| <b>Variation</b>     | –  |   |
| <b>Parameters</b>    | data   |   |
|                      | <b>Type</b>  | Csm_MacGenerateDataType_{Crypto}                          |
|                      | <b>Direction</b>   | IN  |
|                      | <b>Comment</b>   | Contains the data from which a MAC shall be generated of. |
|                      | <b>Variation</b>   | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}              |



△

|                        |   |  |
|------------------------|---|--|
|                        | dataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data from which a MAC shall be generated of. |
|                        | <b>Variation</b>  | –  |
|                        | mac   |  |
|                        | <b>Type</b>   | Csm_MacGenerateResultType_{Crypto}   |
|                        | <b>Direction</b>  | OUT  |
|                        | <b>Comment</b>  | Contains the data of the MAC.  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                                     |
|                        | macLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | INOUT  |
| <b>Comment</b>         | Contains the length in bytes of the MAC.  |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |  |

]

### [SWS\_Csm\_00936] Definition of ClientServerInterface CsmMacVerify\_{Primitive Cfg}

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmMacVerify_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the MAC verification.   |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |  |
|------------------------|---|--|
| <b>Operation</b>       | MacVerify   |  |
| <b>Comment</b>         | Uses the given data to perform a MAC generation and stores the MAC in the memory location pointed to by the MAC pointer.  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_MacVerify</a>   |  |
| <b>Variation</b>       | –   |  |
| <b>Parameters</b>      | data  |  |
|                        | <b>Type</b>   | <a href="#">Csm_MacVerifyDataType_{Crypto}</a>                             |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the data from which a MAC shall be generated of.                  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                               |
|                        | dataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data for whichs MAC shall be verified. |
|                        | <b>Variation</b>  | –  |
|                        | mac   |  |
|                        | <b>Type</b>   | <a href="#">Csm_MacVerifyCompareType_{Crypto}</a>                          |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the MAC to be verified.   |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                               |
|                        | macLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
| <b>Comment</b>         | Contains the length in BITS of the MAC to be verified.  |  |
| <b>Variation</b>       | –   |  |
| verify                 |   |  |
| <b>Type</b>            | <a href="#">Crypto_VerifyResultType</a>   |  |
| <b>Direction</b>       | OUT   |  |
| <b>Comment</b>         | Contains the verification result.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |

]

### [SWS\_Csm\_00947] Definition of ClientServerInterface CsmEncrypt\_{Primitive Cfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmEncrypt_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the encryption.   |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |   |  |
|------------------------|---|---|--|
| <b>Operation</b>       | Encrypt   |   |  |
| <b>Comment</b>         | Encrypts the given data and store the ciphertext in the memory location pointed by the result pointer.  |   |  |
| <b>Mapped to API</b>   | <a href="#">Csm_Encrypt</a>   |   |  |
| <b>Variation</b>       | –   |   |  |
| <b>Parameters</b>      | data  |   |  |
|                        | <b>Type</b>   | <a href="#">Csm_EncryptDataType_{Crypto}</a>              |  |
|                        | <b>Direction</b>  | IN  |  |
|                        | <b>Comment</b>  | Contains the data to be encrypted.                        |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}              |  |
|                        | dataLength  |   |  |
|                        | <b>Type</b>   | uint32  |  |
|                        | <b>Direction</b>  | IN  |  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data to be encrypted. |  |
|                        | <b>Variation</b>  | –   |  |
|                        | result  |   |  |
|                        | <b>Type</b>   | <a href="#">Csm_EncryptResultType_{Crypto}</a>            |  |
|                        | <b>Direction</b>  | OUT   |  |
|                        | <b>Comment</b>  | Contains the data of the cipher.                          |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}              |  |
| resultLength           |   |   |  |
| <b>Type</b>            | uint32  |   |  |
| <b>Direction</b>       | INOUT   |   |  |
| <b>Comment</b>         | Contains the length in bytes of the cipher.   |   |  |
| <b>Variation</b>       | –   |   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |   |  |

]



## [SWS\_Csm\_01906] Definition of ClientServerInterface CsmDecrypt\_{Primitive Cfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmDecrypt_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the decryption.   |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |  |   |
|----------------------|--|---|
| <b>Operation</b>     | Decrypt  |   |
| <b>Comment</b>       | Streaming approach of the decryption.                    |   |
| <b>Mapped to API</b> | <a href="#">Csm_Decrypt</a>                              |   |
| <b>Variation</b>     | -  |   |
| <b>Parameters</b>    | data   |   |
|                      | <b>Type</b>  | <a href="#">Csm_DecryptDataType_{Crypto}</a>              |
|                      | <b>Direction</b>   | IN  |
|                      | <b>Comment</b>   | Contains the data to be decrypted.                        |
|                      | <b>Variation</b>   | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}              |
|                      | dataLength   |   |
|                      | <b>Type</b>  | uint32  |
|                      | <b>Direction</b>   | IN  |
|                      | <b>Comment</b>   | Contains the length in bytes of the data to be decrypted. |
|                      | <b>Variation</b>   | -   |
|                      | result   |   |
|                      | <b>Type</b>  | <a href="#">Csm_DecryptResultType_{Crypto}</a>            |
|                      | <b>Direction</b>   | OUT   |
|                      | <b>Comment</b>   | Contains the data of the decrypted plaintext.             |
|                      | <b>Variation</b>   | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}              |
|                      | resultLength   |   |
| <b>Type</b>          | uint32   |   |
| <b>Direction</b>     | INOUT  |   |
| <b>Comment</b>       | Contains the length in bytes of the decrypted plaintext. |   |
| <b>Variation</b>     | -  |   |

▽



|                        |   |
|------------------------|---|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |
|------------------------|---|

]

### [SWS\_Csm\_01910] Definition of ClientServerInterface CsmAEADEncrypt\_{PrimitiveCfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmAEADEncrypt_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the AEAD encryption.  |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |  |   |
|----------------------|--|---|
| <b>Operation</b>     | AEADEncrypt                                |   |
| <b>Comment</b>       | Streaming approach of the AEAD encryption. |   |
| <b>Mapped to API</b> | <a href="#">Csm_AEADEncrypt</a>            |   |
| <b>Variation</b>     | -  |   |
| <b>Parameters</b>    | plaintext                                  |   |
|                      | <b>Type</b>                                | <a href="#">Csm_AEADEncryptPlaintextType_{Crypto}</a>                                 |
|                      | <b>Direction</b>                           | IN  |
|                      | <b>Comment</b>                             | Contains the plaintext to be encrypted with AEAD.                                     |
|                      | <b>Variation</b>                           | Crypto = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}   |
|                      | plaintextLength                            |   |
|                      | <b>Type</b>                                | uint32  |
|                      | <b>Direction</b>                           | IN  |
|                      | <b>Comment</b>                             | This element Contains the length in bytes of the plaintext to be encrypted with AEAD. |
|                      | <b>Variation</b>                           | -   |
|                      | associatedData                             |   |
|                      | <b>Type</b>                                | <a href="#">Csm_AEADEncryptAssociatedDataType_{Crypto}</a>                            |



△

|                        |   |  |
|------------------------|---|--|
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the data of the header (that is not part of the encryption but authentication). |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |
|                        | associatedDataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the header.                                  |
|                        | <b>Variation</b>  | –  |
|                        | ciphertext  |  |
|                        | <b>Type</b>   | <a href="#">Csm_AEADEncryptCiphertextType_{Crypto}</a>                                   |
|                        | <b>Direction</b>  | OUT  |
|                        | <b>Comment</b>  | Contains the data of the AEAD cipher.  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |
|                        | ciphertextLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | INOUT  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the AEAD cipher.                             |
|                        | <b>Variation</b>  | –  |
|                        | tag   |  |
|                        | <b>Type</b>   | <a href="#">Csm_AEADEncryptTagType_{Crypto}</a>  |
|                        | <b>Direction</b>  | OUT  |
|                        | <b>Comment</b>  | Contains the data of the Tag.  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |
|                        | tagLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | INOUT  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the Tag.                                     |
|                        | <b>Variation</b>  | –  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |

]

### [SWS\_Csm\_01915] Definition of ClientServerInterface CsmAEADDe- crypt\_{PrimitiveCfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmAEADDecrypt_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to execute the AEAD decryption.  |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |   |   |  |
|----------------------|---|---|--|
| <b>Operation</b>     | AEADDecrypt                                     |   |  |
| <b>Comment</b>       | Streaming approach of the AEAD decryption.      |   |  |
| <b>Mapped to API</b> | <a href="#">Csm_AEADDecrypt</a>                 |   |  |
| <b>Variation</b>     | –   |   |  |
| <b>Parameters</b>    | ciphertext                                      |   |  |
|                      | <b>Type</b>                                     | <a href="#">Csm_AEADDecryptCiphertextType_{Crypto}</a>                                    |  |
|                      | <b>Direction</b>                                | IN  |  |
|                      | <b>Comment</b>                                  | Contains the ciphertext to be decrypted with AEAD.  |  |
|                      | <b>Variation</b>                                | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |  |
|                      | ciphertextLength                                |   |  |
|                      | <b>Type</b>                                     | uint32  |  |
|                      | <b>Direction</b>                                | IN  |  |
|                      | <b>Comment</b>                                  | Contains the length in bytes of the ciphertext to be decrypted with AEAD.                 |  |
|                      | <b>Variation</b>                                | –   |  |
|                      | associatedData                                  |   |  |
|                      | <b>Type</b>                                     | <a href="#">Csm_AEADDecryptAssociatedDataType_{Crypto}</a>                                |  |
|                      | <b>Direction</b>                                | IN  |  |
|                      | <b>Comment</b>                                  | Contains the data of the header (that is not part of the encryption but authentication) . |  |
|                      | <b>Variation</b>                                | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |  |
|                      | associatedDataLength                            |   |  |
|                      | <b>Type</b>                                     | uint32  |  |
|                      | <b>Direction</b>                                | IN  |  |
|                      | <b>Comment</b>                                  | Contains the length in bytes of the data of the header.                                   |  |
|                      | <b>Variation</b>                                | –   |  |
| tag                  |   |   |  |
| <b>Type</b>          | <a href="#">Csm_AEADDecryptTagType_{Crypto}</a> |   |  |
| <b>Direction</b>     | IN  |   |  |
| <b>Comment</b>       | Contains the data of the Tag.                   |   |  |
| <b>Variation</b>     | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}    |   |  |
| tagLength            |   |   |  |





|                        |   |   |
|------------------------|---|---|
|                        | <b>Type</b>   | uint32  |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | Contains the length in BITS of the data of the Tag.                       |
|                        | <b>Variation</b>  | –   |
|                        | plaintext   |   |
|                        | <b>Type</b>   | <a href="#">Csm_AEADDecryptPlaintextType_{Crypto}</a>                     |
|                        | <b>Direction</b>  | OUT   |
|                        | <b>Comment</b>  | Contains the data of the decrypted AEAD plaintext.                        |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                              |
|                        | plaintextLength   |   |
|                        | <b>Type</b>   | uint32  |
|                        | <b>Direction</b>  | INOUT   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the decrypted AEAD plaintext. |
|                        | <b>Variation</b>  | –   |
|                        | verify  |   |
|                        | <b>Type</b>   | <a href="#">Crypto_VerifyResultType</a>                                   |
|                        | <b>Direction</b>  | OUT   |
|                        | <b>Comment</b>  | Contains the verification result.   |
|                        | <b>Variation</b>  | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |   |

]

### [SWS\_Csm\_00903] Definition of ClientServerInterface CsmSignatureGenerate\_{PrimitiveCfg}

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmSignatureGenerate_{PrimitiveCfg}   |                            |   |
| <b>Comment</b>         | Synchronous processing interface to generate a signature.   |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |





|  |    |                    |  |
|--|----|--------------------|--|
|  | 13 | CRYPTO_E_KEY_EMPTY | Request failed because of uninitialized source key element |
|--|----|--------------------|--|

|                        |   |   |  |
|------------------------|---|---|--|
| <b>Operation</b>       | SignatureGenerate   |   |  |
| <b>Comment</b>         | Streaming approach of the signature generation.   |   |  |
| <b>Mapped to API</b>   | <a href="#">Csm_SignatureGenerate</a>   |   |  |
| <b>Variation</b>       | –   |   |  |
| <b>Parameters</b>      | data  |   |  |
|                        | <b>Type</b>   | <a href="#">Csm_SignatureGenerateDataType_{Crypto}</a>                                |  |
|                        | <b>Direction</b>  | IN  |  |
|                        | <b>Comment</b>  | Contains the data from which the signature shall be generated.                        |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |  |
|                        | dataLength  |   |  |
|                        | <b>Type</b>   | uint32  |  |
|                        | <b>Direction</b>  | IN  |  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data from which the signature shall be generated. |  |
|                        | <b>Variation</b>  | –   |  |
|                        | signature   |   |  |
|                        | <b>Type</b>   | <a href="#">Csm_SignatureGenerateResultType_{Crypto}</a>                              |  |
|                        | <b>Direction</b>  | OUT   |  |
|                        | <b>Comment</b>  | Contains the signature.   |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |  |
| signatureLength        |   |   |  |
| <b>Type</b>            | uint32  |   |  |
| <b>Direction</b>       | INOUT   |   |  |
| <b>Comment</b>         | Contains the length in bytes of the signature.  |   |  |
| <b>Variation</b>       | –   |   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |   |  |

]

### [SWS\_Csm\_00943] Definition of ClientServerInterface CsmSignatureVerify\_{PrimitiveCfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                  |   |
|------------------|---|
| <b>Name</b>      | CsmSignatureVerify_{PrimitiveCfg}                                       |
| <b>Comment</b>   | Synchronous processing interface to execute the signature verification. |
| <b>IsService</b> | true  |





|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |  |  |
|------------------------|---|--|--|
| <b>Operation</b>       | SignatureVerify   |  |  |
| <b>Comment</b>         | Interface to verify a signature.  |  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_SignatureVerify</a>   |  |  |
| <b>Variation</b>       | -   |  |  |
| <b>Parameters</b>      | data  |  |  |
|                        | <b>Type</b>   | <a href="#">Csm_SignatureVerifyDataType_{Crypto}</a>                             |  |
|                        | <b>Direction</b>  | IN   |  |
|                        | <b>Comment</b>  | Contains the data for whichs signature shall be verified.                        |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                                     |  |
|                        | dataLength  |  |  |
|                        | <b>Type</b>   | uint32   |  |
|                        | <b>Direction</b>  | IN   |  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data for whichs signature shall be verified. |  |
|                        | <b>Variation</b>  | -  |  |
|                        | signature   |  |  |
|                        | <b>Type</b>   | <a href="#">Csm_SignatureVerifyCompareType_{Crypto}</a>                          |  |
|                        | <b>Direction</b>  | IN   |  |
|                        | <b>Comment</b>  | Contains the signature to be verified.   |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}                                     |  |
|                        | signatureLength   |  |  |
|                        | <b>Type</b>   | uint32   |  |
|                        | <b>Direction</b>  | IN   |  |
|                        | <b>Comment</b>  | Contains the length in bytes of the signature to be verified.                    |  |
|                        | <b>Variation</b>  | -  |  |
| verify                 |   |  |  |
| <b>Type</b>            | <a href="#">Crypto_VerifyResultType</a>   |  |  |
| <b>Direction</b>       | OUT   |  |  |
| <b>Comment</b>         | Contains the verification result.   |  |  |
| <b>Variation</b>       | -   |  |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |  |

]

## [SWS\_Csm\_00902] Definition of ClientServerInterface CsmRandomGenerate\_{PrimitiveCfg}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |  |
|------------------------|---|----------------------------|--|
| <b>Name</b>            | CsmRandomGenerate_{PrimitiveCfg}  |                            |  |
| <b>Comment</b>         | Synchronous processing interface to execute the random number generation.   |                            |  |
| <b>IsService</b>       | true  |                            |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive}/{Primitive}Config.SHORT-NAME)} |                            |  |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful   |
|                        | 1   | E_NOT_OK                   | Operation failed   |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.                           |
|                        | 4   | CRYPTO_E_ENTROPY_EXHAUSTED | Request failed, entropy of random number generator is exhausted. |

|                        |   |   |  |
|------------------------|---|---|--|
| <b>Operation</b>       | RandomGenerate  |   |  |
| <b>Comment</b>         | Synchronous processing interface to execute the random number generation.   |   |  |
| <b>Mapped to API</b>   | <a href="#">Csm_RandomGenerate</a>  |   |  |
| <b>Variation</b>       | -   |   |  |
| <b>Parameters</b>      | result  |   |  |
|                        | <b>Type</b>   | <a href="#">Csm_RandomGenerateResultType_{Crypto}</a> |  |
|                        | <b>Direction</b>  | OUT   |  |
|                        | <b>Comment</b>  | Contains the random number                            |  |
|                        | <b>Variation</b>  | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}          |  |
|                        | resultLength  |   |  |
|                        | <b>Type</b>   | uint32  |  |
|                        | <b>Direction</b>  | INOUT   |  |
| <b>Possible Errors</b> | <b>Comment</b>  |   |  |
|                        | Contains the length in bytes of the data of random number.  |   |  |
|                        | <b>Variation</b>  | -   |  |
|                        | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_ENTROPY_EXHAUSTED</a> |   |  |

]

### 8.7.2 Client-Server Interfaces (DATA\_REFERENCES)

## [SWS\_Csm\_91051] Definition of ClientServerInterface CsmHash

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[



|                        |  |                       |   |
|------------------------|--|-----------------------|---|
| <b>Name</b>            | CsmHash  |                       |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the hash calculation. |                       |   |
| <b>IsService</b>       | true   |                       |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                   |                       |   |
| <b>Possible Errors</b> | 0  | E_OK                  | Operation successful                              |
|                        | 1  | E_NOT_OK              | Operation failed                                  |
|                        | 2  | CRYPTO_E_BUSY         | Request failed, service is still busy.            |
|                        | 12   | CRYPTO_E_JOB_CANCELED | Request failed because the job has been canceled. |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |  |
|------------------------|---|--|
| <b>Operation</b>       | Hash  |  |
| <b>Comment</b>         | Utilize the random seed service.  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_Hash</a>  |  |
| <b>Variation</b>       | –   |  |
| <b>Parameters</b>      | dataPtr   |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data to be hashed.                      |
|                        | <b>Variation</b>  | –  |
|                        | dataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data to be hashed. |
|                        | <b>Variation</b>  | –  |
|                        | resultPtr   |  |
|                        | <b>Type</b>   | VoidPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the hash.                       |
|                        | <b>Variation</b>  | –  |
|                        | resultLengthPtr   |  |
| <b>Type</b>            | <a href="#">Csm_LengthPtr</a>   |  |
| <b>Direction</b>       | IN  |  |
| <b>Comment</b>         | Contains the length in bytes of the hash.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a> |  |

]

## [SWS\_Csm\_91052] Definition of ClientServerInterface CsmMacGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmMacGenerate   |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the MAC generation. |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                 |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                      |  |  |
|----------------------|--|--|
| <b>Operation</b>     | MacGenerate  |  |
| <b>Comment</b>       | Uses the given data to perform a MAC generation and stores the MAC in the memory location pointed to by the MAC pointer. |  |
| <b>Mapped to API</b> | <a href="#">Csm_MacGenerate</a>  |  |
| <b>Variation</b>     | –  |  |
| <b>Parameters</b>    | dataPtr  |  |
|                      | <b>Type</b>  | ConstVoidPtr   |
|                      | <b>Direction</b>   | IN   |
|                      | <b>Comment</b>   | References the data from which a MAC shall be generated of.                      |
|                      | <b>Variation</b>   | –  |
|                      | dataLength   |  |
|                      | <b>Type</b>  | uint32   |
|                      | <b>Direction</b>   | IN   |
|                      | <b>Comment</b>   | Contains the length in bytes of the data from which a MAC shall be generated of. |
|                      | <b>Variation</b>   | –  |
|                      | macPtr   |  |
|                      | <b>Type</b>  | VoidPtr  |
|                      | <b>Direction</b>   | IN   |
|                      | <b>Comment</b>   | References the data of the MAC.  |
| <b>Variation</b>     | –  |  |





|                        |   |
|------------------------|---|
|                        | macLengthPtr  |
| <b>Type</b>            | Csm_LengthPtr   |
| <b>Direction</b>       | IN  |
| <b>Comment</b>         | Contains the length in bytes of the MAC.  |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |

]

### [SWS\_Csm\_91053] Definition of ClientServerInterface CsmMacVerify

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmMacVerify   |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the MAC verification. |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                   |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob                                 |
| <b>Comment</b>         | Cancels the job.                          |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>             |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_JOB_CANCELED |

|                      |  |
|----------------------|--|
| <b>Operation</b>     | MacVerify  |
| <b>Comment</b>       | Uses the given data to perform a MAC generation and stores the MAC in the memory location pointed to by the MAC pointer. |
| <b>Mapped to API</b> | <a href="#">Csm_MacVerify</a>  |
| <b>Variation</b>     | –  |





|                        |   |  |
|------------------------|---|--|
| <b>Parameters</b>      | dataPtr   |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data from which a MAC shall be generated of.                |
|                        | <b>Variation</b>  | –  |
|                        | dataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data for whichs MAC shall be verified. |
|                        | <b>Variation</b>  | –  |
|                        | macPtr  |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the MAC to be verified.   |
|                        | <b>Variation</b>  | –  |
|                        | macLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in BITS of the MAC to be verified.                     |
|                        | <b>Variation</b>  | –  |
| verifyPtr              |   |  |
| <b>Type</b>            | Csm_VerifyResultPtr   |  |
| <b>Direction</b>       | IN  |  |
| <b>Comment</b>         | Contains the verification result.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |  |

]

### [SWS\_Csm\_91054] Definition of ClientServerInterface CsmEncrypt

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |               |  |
|------------------------|--|---------------|--|
| <b>Name</b>            | CsmEncrypt   |               |  |
| <b>Comment</b>         | Asynchronous processing interface to execute the encryption. |               |  |
| <b>IsService</b>       | true   |               |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}             |               |  |
| <b>Possible Errors</b> | 0  | E_OK          | Operation successful                   |
|                        | 1  | E_NOT_OK      | Operation failed                       |
|                        | 2  | CRYPTO_E_BUSY | Request failed, service is still busy. |





|  |    |                            |   |
|--|----|----------------------------|---|
|  | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|  | 10 | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|  | 12 | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|  | 13 | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |   |
|------------------------|---|---|
| <b>Operation</b>       | Encrypt   |   |
| <b>Comment</b>         | Encrypts the given data and stores the ciphertext in the memory location pointed by the result pointer.   |   |
| <b>Mapped to API</b>   | <a href="#">Csm_Encrypt</a>   |   |
| <b>Variation</b>       | –   |   |
| <b>Parameters</b>      | dataPtr   |   |
|                        | <b>Type</b>   | ConstVoidPtr  |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | References the data to be encrypted.                      |
|                        | <b>Variation</b>  | –   |
|                        | dataLength  |   |
|                        | <b>Type</b>   | uint32  |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data to be encrypted. |
|                        | <b>Variation</b>  | –   |
|                        | resultPtr   |   |
|                        | <b>Type</b>   | VoidPtr   |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | References the data of the cipher.                        |
| <b>Variation</b>       | –   |   |
| resultLengthPtr        |   |   |
| <b>Type</b>            | <a href="#">Csm_LengthPtr</a>   |   |
| <b>Direction</b>       | IN  |   |
| <b>Comment</b>         | Contains the length in bytes of the cipher.   |   |
| <b>Variation</b>       | –   |   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |   |

]

## [SWS\_Csm\_91055] Definition of ClientServerInterface CsmDecrypt

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmDecrypt   |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the decryption. |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}             |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                      |   |   |
|----------------------|---|---|
| <b>Operation</b>     | Decrypt   |   |
| <b>Comment</b>       | Decrypts the given data and stores the plaintext in the memory location pointed by the result Buffer pointer. |   |
| <b>Mapped to API</b> | <a href="#">Csm_Decrypt</a>   |   |
| <b>Variation</b>     | –   |   |
| <b>Parameters</b>    | dataPtr   |   |
|                      | <b>Type</b>   | ConstVoidPtr  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | References the data to be decrypted.                      |
|                      | <b>Variation</b>  | –   |
|                      | dataLength  |   |
|                      | <b>Type</b>   | uint32  |
|                      | <b>Direction</b>  | IN  |
|                      | <b>Comment</b>  | Contains the length in bytes of the data to be decrypted. |
|                      | <b>Variation</b>  | –   |
|                      | resultPtr   |   |
|                      | <b>Type</b>   | VoidPtr   |
|                      | <b>Direction</b>  | IN  |
| <b>Comment</b>       | References the data of the decrypted plaintext.   |   |
| <b>Variation</b>     | –   |   |

▽



|                        |   |
|------------------------|---|
|                        | resultLengthPtr   |
|                        | <b>Type</b> Csm_LengthPtr   |
|                        | <b>Direction</b> IN   |
|                        | <b>Comment</b> Contains the length in bytes of the decrypted plaintext.   |
|                        | <b>Variation</b> –  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |

]

### [SWS\_Csm\_91056] Definition of ClientServerInterface CsmAEADEncrypt

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmAEADEncrypt  |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the AEAD encryption. |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                  |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12  | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Operation</b>     | AEADEncrypt                                |   |  |
| <b>Comment</b>       | Streaming approach of the AEAD encryption. |   |  |
| <b>Mapped to API</b> | <a href="#">Csm_AEADEncrypt</a>            |   |  |
| <b>Variation</b>     | –  |   |  |
| <b>Parameters</b>    | plaintextPtr                               |   |  |
|                      | <b>Type</b>                                | ConstVoidPtr  |  |
|                      | <b>Direction</b>                           | IN  |  |
|                      | <b>Comment</b>                             | References the plaintext to be encrypted with AEAD. |  |
|                      | <b>Variation</b>                           | –   |  |
|                      | plaintextLength                            |   |  |
|                      | <b>Type</b>                                | uint32  |  |
| <b>Direction</b>     | IN   |   |  |



△

|                        |   |  |
|------------------------|---|--|
|                        | <b>Comment</b>  | This element Contains the length in bytes of the plaintext to be encrypted with AEAD.      |
|                        | <b>Variation</b>  | –  |
|                        | associatedDataPtr   |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the header (that is not part of the encryption but authentication). |
|                        | <b>Variation</b>  | –  |
|                        | associatedDataLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the header.                                    |
|                        | <b>Variation</b>  | –  |
|                        | ciphertextPtr   |  |
|                        | <b>Type</b>   | VoidPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the AEAD cipher.  |
|                        | <b>Variation</b>  | –  |
|                        | ciphertextLengthPtr   |  |
|                        | <b>Type</b>   | Csm_LengthPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the AEAD cipher.                               |
|                        | <b>Variation</b>  | –  |
|                        | tagPtr  |  |
|                        | <b>Type</b>   | VoidPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the Tag.  |
|                        | <b>Variation</b>  | –  |
|                        | tagLengthPtr  |  |
|                        | <b>Type</b>   | Csm_LengthPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the data of the Tag.                                       |
|                        | <b>Variation</b>  | –  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob                                 |
| <b>Comment</b>         | Cancels the job.                          |
| <b>Mapped to API</b>   | Csm_CancelJob                             |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_JOB_CANCELED |

]



## [SWS\_Csm\_91057] Definition of ClientServerInterface CsmAEADDecrypt

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |   |                            |   |
|------------------------|---|----------------------------|---|
| <b>Name</b>            | CsmAEADDecrypt  |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the AEAD decryption. |                            |   |
| <b>IsService</b>       | true  |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                  |                            |   |
| <b>Possible Errors</b> | 0   | E_OK                       | Operation successful  |
|                        | 1   | E_NOT_OK                   | Operation failed  |
|                        | 2   | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9   | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10  | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12  | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13  | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                      |   |  |
|----------------------|---|--|
| <b>Operation</b>     | AEADDecrypt   |  |
| <b>Comment</b>       | Streaming approach of the AEAD decryption.              |  |
| <b>Mapped to API</b> | <a href="#">Csm_AEADDecrypt</a>                         |  |
| <b>Variation</b>     | –   |  |
| <b>Parameters</b>    | ciphertextPtr   |  |
|                      | <b>Type</b>   | ConstVoidPtr   |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | References the ciphertext to be decrypted with AEAD.                                       |
|                      | <b>Variation</b>  | –  |
|                      | ciphertextLength  |  |
|                      | <b>Type</b>   | uint32   |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | Contains the length in bytes of the ciphertext to be decrypted with AEAD.                  |
|                      | <b>Variation</b>  | –  |
|                      | associatedDataPtr                                       |  |
|                      | <b>Type</b>   | ConstVoidPtr   |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | References the data of the header (that is not part of the encryption but authentication). |
|                      | <b>Variation</b>  | –  |
|                      | associatedDataLength                                    |  |
|                      | <b>Type</b>   | uint32   |
| <b>Direction</b>     | IN  |  |
| <b>Comment</b>       | Contains the length in bytes of the data of the header. |  |
| <b>Variation</b>     | –   |  |
| tagPtr               |   |  |
| <b>Type</b>          | ConstVoidPtr  |  |

▽

△

|                        |   |  |
|------------------------|---|--|
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the Tag.                      |
|                        | <b>Variation</b>  | –  |
|                        | tagLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in BITS of the data of the Tag.  |
|                        | <b>Variation</b>  | –  |
|                        | plaintextPtr  |  |
|                        | <b>Type</b>   | VoidPtr  |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the decrypted AEAD plaintext. |
|                        | <b>Variation</b>  | –  |
|                        | plaintextLengthPtr  |  |
|                        | <b>Type</b>   | <a href="#">Csm_LengthPtr</a>                        |
| <b>Direction</b>       | IN  |  |
| <b>Comment</b>         | Contains the length in bytes of the data of the decrypted AEAD plaintext.   |  |
| <b>Variation</b>       | –   |  |
| verifyPtr              |   |  |
| <b>Type</b>            | <a href="#">Csm_VerifyResultPtr</a>   |  |
| <b>Direction</b>       | IN  |  |
| <b>Comment</b>         | Contains the verification result.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

]

### [SWS\_Csm\_91058] Definition of ClientServerInterface CsmSignatureGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmSignatureGenerate                                       |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to generate a signature. |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}           |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                      |  |   |
|----------------------|--|---|
| <b>Operation</b>     | SignatureGenerate                              |   |
| <b>Comment</b>       | Operation to generate a signature.             |   |
| <b>Mapped to API</b> | <a href="#">Csm_SignatureGenerate</a>          |   |
| <b>Variation</b>     | –  |   |
| <b>Parameters</b>    | dataPtr  |   |
|                      | <b>Type</b>                                    | ConstVoidPtr  |
|                      | <b>Direction</b>                               | IN  |
|                      | <b>Comment</b>                                 | References the data from which the signature shall be generated.                      |
|                      | <b>Variation</b>                               | –   |
|                      | dataLength                                     |   |
|                      | <b>Type</b>                                    | uint32  |
|                      | <b>Direction</b>                               | IN  |
|                      | <b>Comment</b>                                 | Contains the length in bytes of the data from which the signature shall be generated. |
|                      | <b>Variation</b>                               | –   |
|                      | resultPtr                                      |   |
|                      | <b>Type</b>                                    | VoidPtr   |
|                      | <b>Direction</b>                               | IN  |
|                      | <b>Comment</b>                                 | References the signature.   |
|                      | <b>Variation</b>                               | –   |
|                      | resultLengthPtr                                |   |
| <b>Type</b>          | <a href="#">Csm_LengthPtr</a>                  |   |
| <b>Direction</b>     | IN   |   |
| <b>Comment</b>       | Contains the length in bytes of the signature. |   |





|                        |   |   |
|------------------------|---|---|
|                        | <b>Variation</b>  | – |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |   |

]

### [SWS\_Csm\_91059] Definition of ClientServerInterface CsmSignatureVerify

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmSignatureVerify   |                            |   |
| <b>Comment</b>         | Asynchronous processing interface to execute the signature verification. |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                         |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13   | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                      |                                     |  |
|----------------------|-------------------------------------|--|
| <b>Operation</b>     | SignatureVerify                     |  |
| <b>Comment</b>       | Operation to verify a signature.    |  |
| <b>Mapped to API</b> | <a href="#">Csm_SignatureVerify</a> |  |
| <b>Variation</b>     | –                                   |  |
| <b>Parameters</b>    | dataPtr                             |  |
|                      | <b>Type</b>                         | ConstVoidPtr   |
|                      | <b>Direction</b>                    | IN   |
|                      | <b>Comment</b>                      | References the data for which signature shall be verified. |
|                      | <b>Variation</b>                    | –  |





|                        |   |   |
|------------------------|---|---|
|                        | dataLength  |   |
|                        | <b>Type</b>   | uint32  |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | Contains the length in bytes of the data for which signature shall be verified. |
|                        | <b>Variation</b>  | –   |
|                        | comparePtr  |   |
|                        | <b>Type</b>   | ConstVoidPtr  |
|                        | <b>Direction</b>  | IN  |
|                        | <b>Comment</b>  | References the signature to be verified.  |
|                        | <b>Variation</b>  | –   |
|                        | compareLength   |   |
|                        | <b>Type</b>   | uint32  |
|                        | <b>Direction</b>  | IN  |
| <b>Comment</b>         | Contains the length in bytes of the signature to be verified.   |   |
| <b>Variation</b>       | –   |   |
| verifyPtr              |   |   |
| <b>Type</b>            | Csm_VerifyResultPtr   |   |
| <b>Direction</b>       | IN  |   |
| <b>Comment</b>         | Contains the verification result.   |   |
| <b>Variation</b>       | –   |   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_KEY_EMPTY |   |

]

## [SWS\_Csm\_91060] Definition of ClientServerInterface CsmRandomGenerate

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |                            |  |
|------------------------|--|----------------------------|--|
| <b>Name</b>            | CsmRandomGenerate  |                            |  |
| <b>Comment</b>         | Asynchronous processing interface to execute the random number generation. |                            |  |
| <b>IsService</b>       | true   |                            |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                           |                            |  |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful   |
|                        | 1  | E_NOT_OK                   | Operation failed   |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.                           |
|                        | 4  | CRYPTO_E_ENTROPY_EXHAUSTED | Request failed, entropy of random number generator is exhausted. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.                |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |                               |
|------------------------|---|-------------------------------|
| <b>Operation</b>       | RandomGenerate  |                               |
| <b>Comment</b>         | Generates a random number and stores it in the memory location pointed by the resultBuffer pointer.                             |                               |
| <b>Mapped to API</b>   | <a href="#">Csm_RandomGenerate</a>  |                               |
| <b>Variation</b>       | –   |                               |
| <b>Parameters</b>      | resultPtr   |                               |
|                        | <b>Type</b>   | VoidPtr                       |
|                        | <b>Direction</b>  | IN                            |
|                        | <b>Comment</b>  | References the random number. |
|                        | <b>Variation</b>  | –                             |
|                        | resultLengthPtr   |                               |
|                        | <b>Type</b>   | <a href="#">Csm_LengthPtr</a> |
|                        | <b>Direction</b>  | IN                            |
| <b>Comment</b>         | Contains the length in bytes of the data of random number.  |                               |
| <b>Variation</b>       | –   |                               |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_ENTROPY_EXHAUSTED</a> |                               |

]

### [SWS\_Csm\_91109] Definition of ClientServerInterface CsmCustom [

|                        |   |                                       |   |
|------------------------|---|---------------------------------------|---|
| <b>Name</b>            | CsmCustom   |                                       |   |
| <b>Comment</b>         | Asynchronous processing interface to execute custom crypto operation. |                                       |   |
| <b>IsService</b>       | true  |                                       |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                      |                                       |   |
| <b>Possible Errors</b> | 0   | <a href="#">E_OK</a>                  | Operation successful                              |
|                        | 1   | <a href="#">E_NOT_OK</a>              | Operation failed                                  |
|                        | 2   | <a href="#">CRYPTO_E_BUSY</a>         | Request failed, service is still busy.            |
|                        | 12  | <a href="#">CRYPTO_E_JOB_CANCELED</a> | Request failed because the job has been canceled. |
|                        | 14  | <a href="#">CRYPTO_E_CUSTOM_ERROR</a> | –   |

|                      |                               |
|----------------------|-------------------------------|
| <b>Operation</b>     | CancelJob                     |
| <b>Comment</b>       | Cancels the Job.              |
| <b>Mapped to API</b> | <a href="#">Csm_CancelJob</a> |
| <b>Variation</b>     | –                             |





|                        |   |
|------------------------|---|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_JOB_CANCELED |
|------------------------|---|

|                      |   |              |
|----------------------|---|--------------|
| <b>Operation</b>     | CustomService                           |              |
| <b>Comment</b>       | Operation to execute custom crypto job. |              |
| <b>Mapped to API</b> | Csm_CustomService                       |              |
| <b>Variation</b>     | –                                       |              |
| <b>Parameters</b>    | targetKeyId                             |              |
|                      | <b>Type</b>                             | uint32       |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | inputPtr                                |              |
|                      | <b>Type</b>                             | ConstVoidPtr |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | inputLength                             |              |
|                      | <b>Type</b>                             | uint32       |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | secondaryInputPtr                       |              |
|                      | <b>Type</b>                             | ConstVoidPtr |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | secondaryInputLength                    |              |
|                      | <b>Type</b>                             | uint32       |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | tertiaryInputPtr                        |              |
|                      | <b>Type</b>                             | ConstVoidPtr |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | tertiaryInputLength                     |              |
|                      | <b>Type</b>                             | uint32       |
|                      | <b>Direction</b>                        | IN           |
|                      | <b>Comment</b>                          | –            |
|                      | <b>Variation</b>                        | –            |
|                      | outputPtr                               |              |
| <b>Type</b>          | VoidPtr                                 |              |
| <b>Direction</b>     | IN                                      |              |
| <b>Comment</b>       | –                                       |              |





|                        |   |         |  |  |
|------------------------|---|---------|--|--|
|                        | <b>Variation</b>  | –       |  |  |
|                        | outputLengthPtr   |         |  |  |
|                        | <b>Type</b>   | uint32* |  |  |
|                        | <b>Direction</b>  | IN      |  |  |
|                        | <b>Comment</b>  | –       |  |  |
|                        | <b>Variation</b>  | –       |  |  |
|                        | secondaryOutputPtr  |         |  |  |
|                        | <b>Type</b>   | VoidPtr |  |  |
|                        | <b>Direction</b>  | IN      |  |  |
|                        | <b>Comment</b>  | –       |  |  |
|                        | <b>Variation</b>  | –       |  |  |
|                        | secondaryOutputLengthPtr  |         |  |  |
|                        | <b>Type</b>   | uint32* |  |  |
|                        | <b>Direction</b>  | IN      |  |  |
|                        | <b>Comment</b>  | –       |  |  |
| <b>Variation</b>       | –   |         |  |  |
| verifyPtr              |   |         |  |  |
| <b>Type</b>            | Crypto_VerifyResultType*  |         |  |  |
| <b>Direction</b>       | IN  |         |  |  |
| <b>Comment</b>         | –   |         |  |  |
| <b>Variation</b>       | –   |         |  |  |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_JOB_CANCELED<br>CRYPTO_E_CUSTOM_ERROR |         |  |  |

]

### 8.7.3 Client-Server-Interfaces (Key Management)

#### [SWS\_Csm\_91035] Definition of ClientServerInterface CsmJobKeySetValid [

|                        |  |                       |   |
|------------------------|--|-----------------------|---|
| <b>Name</b>            | CsmJobKeySetValid                                |                       |   |
| <b>Comment</b>         | Interface to set a key valid.                    |                       |   |
| <b>IsService</b>       | true   |                       |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |                       |   |
| <b>Possible Errors</b> | 0  | E_OK                  | Operation successful                              |
|                        | 1  | E_NOT_OK              | Operation failed                                  |
|                        | 2  | CRYPTO_E_BUSY         | Request failed, service is still busy.            |
|                        | 12   | CRYPTO_E_JOB_CANCELED | Request failed because the job has been canceled. |



|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | KeySetValid   |
| <b>Comment</b>         | Operation to set a key valid.   |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeySetValid</a>  |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a> |

]

### [SWS\_Csm\_91003] Definition of ClientServerInterface CsmJobKeySetInvalid [

|                        |  |                                       |   |
|------------------------|--|---------------------------------------|---|
| <b>Name</b>            | CsmJobKeySetInvalid                                |                                       |   |
| <b>Comment</b>         | Interface to set the status of the key to invalid. |                                       |   |
| <b>IsService</b>       | true   |                                       |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}   |                                       |   |
| <b>Possible Errors</b> | 0  | <a href="#">E_OK</a>                  | Operation successful                              |
|                        | 1  | <a href="#">E_NOT_OK</a>              | Operation failed                                  |
|                        | 2  | <a href="#">CRYPTO_E_BUSY</a>         | Request failed, service is still busy.            |
|                        | 12   | <a href="#">CRYPTO_E_JOB_CANCELED</a> | Request failed because the job has been canceled. |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | KeySetInvalid   |
| <b>Comment</b>         | Operation to set the status of the key to invalid.                                |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeySetInvalid</a>  |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a> |

]

### [SWS\_Csm\_91036] Definition of ClientServerInterface CsmJobRandomSeed [

|                        |  |                        |  |
|------------------------|--|------------------------|--|
| <b>Name</b>            | CsmJobRandomSeed                                 |                        |  |
| <b>Comment</b>         | Interface to random seed operation.              |                        |  |
| <b>IsService</b>       | true   |                        |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |                        |  |
| <b>Possible Errors</b> | 0  | E_OK                   | Operation successful                                       |
|                        | 1  | E_NOT_OK               | Operation failed   |
|                        | 2  | CRYPTO_E_BUSY          | Request failed, service is still busy.                     |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID | Request failed, the key is not valid.                      |
|                        | 12   | CRYPTO_E_JOB_CANCELED  | Request failed because the job has been canceled.          |
|                        | 13   | CRYPTO_E_KEY_EMPTY     | Request failed because of uninitialized source key element |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |  |
|------------------------|---|--|
| <b>Operation</b>       | RandomSeed  |  |
| <b>Comment</b>         | Utilize the random seed service.  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_JobRandomSeed</a>   |  |
| <b>Variation</b>       | –   |  |
| <b>Parameters</b>      | seedPtr   |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Holds the data which shall be used for the random seed initialization. |
|                        | <b>Variation</b>  | –  |
|                        | seedLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length of the seed in bytes.                              |
|                        | <b>Variation</b>  | –  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |  |

]

## [SWS\_Csm\_91037] Definition of ClientServerInterface CsmJobKeyGenerate [

|                        |  |                        |  |
|------------------------|--|------------------------|--|
| <b>Name</b>            | CsmJobKeyGenerate                                |                        |  |
| <b>Comment</b>         | Interface to execute key generation.             |                        |  |
| <b>IsService</b>       | true   |                        |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |                        |  |
| <b>Possible Errors</b> | 0  | E_OK                   | Operation successful                                       |
|                        | 1  | E_NOT_OK               | Operation failed   |
|                        | 2  | CRYPTO_E_BUSY          | Request failed, service is still busy.                     |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID | Request failed, the key is not valid.                      |
|                        | 12   | CRYPTO_E_JOB_CANCELED  | Request failed because the job has been canceled.          |
|                        | 13   | CRYPTO_E_KEY_EMPTY     | Request failed because of uninitialized source key element |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | KeyGenerate   |
| <b>Comment</b>         | Generates new key material and stores it in the key identified by keyId.  |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeyGenerate</a>  |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a> |

]

### [SWS\_Csm\_91038] Definition of ClientServerInterface CsmJobKeyDerive [

|                        |  |                         |   |
|------------------------|--|-------------------------|---|
| <b>Name</b>            | CsmJobKeyDerive                                  |                         |   |
| <b>Comment</b>         | Interface to execute key derive.                 |                         |   |
| <b>IsService</b>       | true   |                         |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |                         |   |
| <b>Possible Errors</b> | 0  | E_OK                    | Operation successful  |
|                        | 1  | E_NOT_OK                | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY           | Request failed, service is still busy.                      |
|                        | 6  | CRYPTO_E_KEY_READ_FAIL  | The service request failed because read access was denied.  |
|                        | 7  | CRYPTO_E_KEY_WRITE_FAIL | The service request failed because write access was denied. |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID  | Request failed, the key is not valid.                       |

▽



|  |    |                            |   |
|--|----|----------------------------|---|
|  | 10 | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|  | 12 | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|  | 13 | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |   |             |        |                  |    |                |   |                  |   |
|------------------------|---|-------------|--------|------------------|----|----------------|---|------------------|---|
| <b>Operation</b>       | KeyDerive   |             |        |                  |    |                |   |                  |   |
| <b>Comment</b>         | Derives a new key by using the key elements in the given key. The given key contains the key elements for the password and salt. The derived key is stored in the key element with the id 1 of the key identified by targetCryptoKeyId.   |             |        |                  |    |                |   |                  |   |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeyDerive</a>  |             |        |                  |    |                |   |                  |   |
| <b>Variation</b>       | –   |             |        |                  |    |                |   |                  |   |
| <b>Parameters</b>      | targetKeyId <table border="1" data-bbox="470 1064 1401 1209"> <tr> <td><b>Type</b></td> <td>uint32</td> </tr> <tr> <td><b>Direction</b></td> <td>IN</td> </tr> <tr> <td><b>Comment</b></td> <td>Holds the identifier of the key which is used to store the derived key.</td> </tr> <tr> <td><b>Variation</b></td> <td>–</td> </tr> </table> | <b>Type</b> | uint32 | <b>Direction</b> | IN | <b>Comment</b> | Holds the identifier of the key which is used to store the derived key. | <b>Variation</b> | – |
| <b>Type</b>            | uint32  |             |        |                  |    |                |   |                  |   |
| <b>Direction</b>       | IN  |             |        |                  |    |                |   |                  |   |
| <b>Comment</b>         | Holds the identifier of the key which is used to store the derived key.   |             |        |                  |    |                |   |                  |   |
| <b>Variation</b>       | –   |             |        |                  |    |                |   |                  |   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_READ_FAIL</a><br><a href="#">CRYPTO_E_KEY_WRITE_FAIL</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a>  |             |        |                  |    |                |   |                  |   |

]

### [SWS\_Csm\_91039] Definition of ClientServerInterface CsmJobKeyExchange CalcPubVal [

|                        |  |               |  |
|------------------------|--|---------------|--|
| <b>Name</b>            | CsmJobKeyExchangeCalcPubVal  |               |  |
| <b>Comment</b>         | Interface to execute calculation of the public value for key exchange. |               |  |
| <b>IsService</b>       | true   |               |  |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                       |               |  |
| <b>Possible Errors</b> | 0  | E_OK          | Operation successful                   |
|                        | 1  | E_NOT_OK      | Operation failed                       |
|                        | 2  | CRYPTO_E_BUSY | Request failed, service is still busy. |





|  |    |                        |  |
|--|----|------------------------|--|
|  | 9  | CRYPTO_E_KEY_NOT_VALID | Request failed, the key is not valid.                      |
|  | 12 | CRYPTO_E_JOB_CANCELED  | Request failed because the job has been canceled.          |
|  | 13 | CRYPTO_E_KEY_EMPTY     | Request failed because of uninitialized source key element |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |  |   |
|------------------------|--|---|
| <b>Operation</b>       | KeyExchangeCalcPubVal  |   |
| <b>Comment</b>         | Calculates the public value of the current user for the key exchange and stores the public key in the provided buffer.   |   |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeyExchangeCalcPubVal</a>   |   |
| <b>Variation</b>       | –  |   |
| <b>Parameters</b>      | publicValuePtr   |   |
|                        | <b>Type</b>  | VoidPtr   |
|                        | <b>Direction</b>   | IN  |
|                        | <b>Comment</b>   | Contains the pointer to the memory location where the public value shall be stored. |
|                        | <b>Variation</b>   | –   |
|                        | publicValueLengthPtr   |   |
|                        | <b>Type</b>  | <a href="#">Csm_LengthPtr</a>   |
|                        | <b>Direction</b>   | IN  |
| <b>Comment</b>         | Holds a pointer to the memory location in which the public value length in bytes is stored. On calling this function, this parameter shall contain the size of the buffer in bytes provided by publicValuePtr. When the request has finished, the actual length of the returned value shall be stored. |   |
| <b>Variation</b>       | –  |   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a>  |   |

]

### [SWS\_Csm\_91040] Definition of ClientServerInterface CsmJobKeyExchange CalcSecret

|                  |   |
|------------------|---|
| <b>Name</b>      | CsmJobKeyExchangeCalcSecret   |
| <b>Comment</b>   | Interface to execute calculation of shared secret for key exchange. |
| <b>IsService</b> | true  |
| <b>Variation</b> | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)}                    |





|                        |    |                        |  |
|------------------------|----|------------------------|--|
| <b>Possible Errors</b> | 0  | E_OK                   | Operation successful                                       |
|                        | 1  | E_NOT_OK               | Operation failed   |
|                        | 2  | CRYPTO_E_BUSY          | Request failed, service is still busy.                     |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID | Request failed, the key is not valid.                      |
|                        | 12 | CRYPTO_E_JOB_CANCELED  | Request failed because the job has been canceled.          |
|                        | 13 | CRYPTO_E_KEY_EMPTY     | Request failed because of uninitialized source key element |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | Cancels the job.  |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                        |  |   |
|------------------------|--|---|
| <b>Operation</b>       | KeyExchangeCalcSecret  |   |
| <b>Comment</b>         | Calculates the shared secret key for the key exchange with the key material of the key identified by the keyId and the partner public key. The shared secret key is stored as a key element in the same key. |   |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeyExchangeCalcSecret</a>   |   |
| <b>Variation</b>       | –  |   |
| <b>Parameters</b>      | partnerPublicValuePtr  |   |
|                        | <b>Type</b>  | <a href="#">Csm_KeyDataType_{Crypto}</a>  |
|                        | <b>Direction</b>   | IN  |
|                        | <b>Comment</b>   | Holds the pointer to the memory location containing the partner's public value. |
|                        | <b>Variation</b>   | –   |
|                        | partnerPublicValueLength   |   |
|                        | <b>Type</b>  | uint32  |
|                        | <b>Direction</b>   | IN  |
|                        | <b>Comment</b>   | Contains the number of bytes of the partner public value.                       |
|                        | <b>Variation</b>   | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_EMPTY</a>  |   |

]

### [SWS\_Csm\_91113] Definition of ClientServerInterface CsmJobKeyWrap [

|                  |  |
|------------------|--|
| <b>Name</b>      | CsmJobKeyWrap                                    |
| <b>Comment</b>   | Interface to execute key wrap.                   |
| <b>IsService</b> | true   |
| <b>Variation</b> | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |





|                        |    |                            |   |
|------------------------|----|----------------------------|---|
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 6  | CRYPTO_E_KEY_READ_FAIL     | The service request failed because read access was denied.  |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10 | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12 | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |
|                        | 13 | CRYPTO_E_KEY_EMPTY         | Request failed because of uninitialized source key element  |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob   |
| <b>Comment</b>         | –   |
| <b>Mapped to API</b>   | <a href="#">Csm_CancelJob</a>   |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a> |

|                      |   |  |
|----------------------|---|--|
| <b>Operation</b>     | KeyWrap   |  |
| <b>Comment</b>       | Wraps the plaintext key given by sourceKeyId (in the key element with the id 1) with the key wrapping key associated with the jobId. The wrapped key will be written to ciphertextPtr. If the algorithm does provide an authenticator this will be written to authenticatorPtr. If the algorithm has no authenticator or the algorithm has an authenticator and no authentication shall be done, authenticatorLengthPtr shall be set to zero. |  |
| <b>Mapped to API</b> | <a href="#">Csm_JobKeyWrap</a>  |  |
| <b>Variation</b>     | –   |  |
| <b>Parameters</b>    | sourceKeyId   |  |
|                      | <b>Type</b>   | uint32   |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | Holds the identifier of the key to be wrapped.   |
|                      | <b>Variation</b>  | –  |
|                      | ciphertextPtr   |  |
|                      | <b>Type</b>   | VoidPtr  |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | References the data of the wrapped key.          |
|                      | <b>Variation</b>  | –  |
|                      | ciphertextLengthPtr   |  |
|                      | <b>Type</b>   | <a href="#">Csm_LengthPtr</a>                    |
|                      | <b>Direction</b>  | IN   |
|                      | <b>Comment</b>  | Contains the length in bytes of the wrapped key. |
|                      | <b>Variation</b>  | –  |
|                      | authenticatorPtr  |  |
| <b>Type</b>          | VoidPtr   |  |
| <b>Direction</b>     | IN  |  |





|                        |                  |  |
|------------------------|------------------|--|
|                        | <b>Comment</b>   | Contains the pointer to the data of the authenticator.   |
|                        | <b>Variation</b> | –  |
|                        |                  | authenticatorLengthPtr   |
|                        | <b>Type</b>      | Csm_LengthPtr  |
|                        | <b>Direction</b> | IN   |
|                        | <b>Comment</b>   | Contains the length in bytes of the authenticator.   |
|                        | <b>Variation</b> | –  |
| <b>Possible Errors</b> |                  | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY<br>CRYPTO_E_KEY_READ_FAIL<br>CRYPTO_E_KEY_NOT_VALID<br>CRYPTO_E_KEY_SIZE_MISMATCH<br>CRYPTO_E_JOB_CANCELED<br>CRYPTO_E_KEY_EMPTY |

]

**[SWS\_Csm\_91114] Definition of ClientServerInterface CsmJobKeyUnwrap [**

|                        |  |                            |   |
|------------------------|--|----------------------------|---|
| <b>Name</b>            | CsmJobKeyUnwrap                                  |                            |   |
| <b>Comment</b>         | Interface to execute key unwrap.                 |                            |   |
| <b>IsService</b>       | true   |                            |   |
| <b>Variation</b>       | Primitive = {ecuc(Csm/CsmPrimitives.SHORT-NAME)} |                            |   |
| <b>Possible Errors</b> | 0  | E_OK                       | Operation successful  |
|                        | 1  | E_NOT_OK                   | Operation failed  |
|                        | 2  | CRYPTO_E_BUSY              | Request failed, service is still busy.  |
|                        | 7  | CRYPTO_E_KEY_WRITE_FAIL    | The service request failed because write access was denied.   |
|                        | 9  | CRYPTO_E_KEY_NOT_VALID     | Request failed, the key is not valid.   |
|                        | 10   | CRYPTO_E_KEY_SIZE_MISMATCH | Request failed because the key element is not partially accessible and the provided key element length is too short or too long for that key element. |
|                        | 12   | CRYPTO_E_JOB_CANCELED      | Request failed because the job has been canceled.   |

|                        |   |
|------------------------|---|
| <b>Operation</b>       | CancelJob                                 |
| <b>Comment</b>         | Cancels the job.                          |
| <b>Mapped to API</b>   | Csm_CancelJob                             |
| <b>Variation</b>       | –   |
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_JOB_CANCELED |



|                        |   |  |
|------------------------|---|--|
| <b>Operation</b>       | KeyUnwrap   |  |
| <b>Comment</b>         | Unwraps the wrapped key given by the ciphertextPtr with the key wrapping key associated with the jobId. The unwrapped key will be written to targetKeyId in the element with the Id 1. If an authentication shall be done, the authenticator shall be referenced with authenticatorPtr. If the algorithm has no authenticator or the algorithm has an authenticator and no authentication shall be done, authenticatorLengthPtr shall be set to zero. If the algorithm has no authentication, verifyPtr will be set to CRYPTO_E_VER_OK. |  |
| <b>Mapped to API</b>   | <a href="#">Csm_JobKeyUnwrap</a>  |  |
| <b>Variation</b>       | –   |  |
| <b>Parameters</b>      | targetKeyId   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Holds the identifier of the slot where the plaintext key shall be written. |
|                        | <b>Variation</b>  | –  |
|                        | ciphertextPtr   |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | References the data of the wrapped key.                                    |
|                        | <b>Variation</b>  | –  |
|                        | ciphertextLength  |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the wrapped key.                           |
|                        | <b>Variation</b>  | –  |
|                        | authenticatorPtr  |  |
|                        | <b>Type</b>   | ConstVoidPtr   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the pointer to the data of the authenticator.                     |
|                        | <b>Variation</b>  | –  |
|                        | authenticatorLength   |  |
|                        | <b>Type</b>   | uint32   |
|                        | <b>Direction</b>  | IN   |
|                        | <b>Comment</b>  | Contains the length in bytes of the authenticator.                         |
| <b>Variation</b>       | –   |  |
| verifyPtr              |   |  |
| <b>Type</b>            | <a href="#">Csm_VerifyResultPtr</a>   |  |
| <b>Direction</b>       | IN  |  |
| <b>Comment</b>         | Contains the verification result.   |  |
| <b>Variation</b>       | –   |  |
| <b>Possible Errors</b> | <a href="#">E_OK</a><br><a href="#">E_NOT_OK</a><br><a href="#">CRYPTO_E_BUSY</a><br><a href="#">CRYPTO_E_KEY_WRITE_FAIL</a><br><a href="#">CRYPTO_E_KEY_NOT_VALID</a><br><a href="#">CRYPTO_E_KEY_SIZE_MISMATCH</a><br><a href="#">CRYPTO_E_JOB_CANCELED</a>   |  |

]

### 8.7.4 Client-Server-Interfaces (Context Service)

#### [SWS\_Csm\_91106] Definition of ClientServerInterface CsmContextService\_{Job} [

|                        |  |               |  |
|------------------------|--|---------------|--|
| <b>Name</b>            | CsmContextService_{Job}  |               |  |
| <b>Comment</b>         | Interface to context data operation  |               |  |
| <b>IsService</b>       | true   |               |  |
| <b>Variation</b>       | {ecuc(Csm/CsmJobs/CsmJob. CsmJobServiceInterfaceContextUsePort)} == CRYPTO_USE_PORT<br>Job = {ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)} |               |  |
| <b>Possible Errors</b> | 0  | E_OK          | Operation successful                   |
|                        | 1  | E_NOT_OK      | Operation failed                       |
|                        | 2  | CRYPTO_E_BUSY | Request failed, service is still busy. |

|                        |                                       |  |  |
|------------------------|---------------------------------------|--|--|
| <b>Operation</b>       | RestoreContextJob                     |  |  |
| <b>Comment</b>         | Restore the job context.              |  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_RestoreContextJob</a> |  |  |
| <b>Variation</b>       | -                                     |  |  |
| <b>Parameters</b>      | contextBuffer                         |  |  |
|                        | <b>Type</b>                           | ConstVoidPtr   |  |
|                        | <b>Direction</b>                      | IN   |  |
|                        | <b>Comment</b>                        | Provides the buffer for the context as [DATA_REFERENCE]. |  |
|                        | <b>Variation</b>                      | -  |  |
|                        | contextBufferLength                   |  |  |
|                        | <b>Type</b>                           | uint32   |  |
|                        | <b>Direction</b>                      | IN   |  |
| <b>Possible Errors</b> | E_OK                                  |  |  |
|                        | E_NOT_OK                              |  |  |
|                        | CRYPTO_E_BUSY                         |  |  |

|                      |  |   |  |
|----------------------|--|---|--|
| <b>Operation</b>     | SaveContextJob                               |   |  |
| <b>Comment</b>       | Save the job context to the provided buffer. |   |  |
| <b>Mapped to API</b> | <a href="#">Csm_SaveContextJob</a>           |   |  |
| <b>Variation</b>     | -  |   |  |
| <b>Parameters</b>    | contextBufferPtr                             |   |  |
|                      | <b>Type</b>                                  | VoidPtr   |  |
|                      | <b>Direction</b>                             | IN  |  |
|                      | <b>Comment</b>                               | Provides the buffer for the context as [DATA_REFERENCE].                |  |
|                      | <b>Variation</b>                             | -   |  |
|                      | contextBufferLengthPtr                       |   |  |
|                      | <b>Type</b>                                  | uint32  |  |
|                      | <b>Direction</b>                             | IN  |  |
|                      | <b>Comment</b>                               | Contains the length in bytes of the context buffer as [DATA_REFERENCE]. |  |
|                      | <b>Variation</b>                             | -   |  |





|                        |                                   |
|------------------------|-----------------------------------|
| <b>Possible Errors</b> | E_OK<br>E_NOT_OK<br>CRYPTO_E_BUSY |
|------------------------|-----------------------------------|

]

## 8.7.5 Client-Server-Interface Callbacks

### [SWS\_Csm\_00928] Definition of ClientServerInterface CallbackNotification

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                        |  |   |   |
|------------------------|--|---|---|
| <b>Name</b>            | CallbackNotification                     |   |   |
| <b>Comment</b>         | Interface for the callback notification. |   |   |
| <b>IsService</b>       | true                                     |   |   |
| <b>Variation</b>       | -  |   |   |
| <b>Possible Errors</b> | -  | - | - |

|                        |   |  |  |
|------------------------|---|--|--|
| <b>Operation</b>       | CallbackNotification  |  |  |
| <b>Comment</b>         | Notifies the application with a return value that the job has finished. |  |  |
| <b>Mapped to API</b>   | <a href="#">Csm_CallbackNotification</a>                                |  |  |
| <b>Variation</b>       | -   |  |  |
| <b>Parameters</b>      | result  |  |  |
|                        | <b>Type</b>   | <a href="#">Crypto_ResultType</a>                      |  |
|                        | <b>Direction</b>  | IN   |  |
|                        | <b>Comment</b>  | Return value that shall be returned to the application |  |
| <b>Possible Errors</b> | -   |  |  |

]

## 8.7.6 Implementation Data Types

### [SWS\_Csm\_01029] Definition of ImplementationDataType Crypto\_Operation ModeType

|                     |                          |
|---------------------|--------------------------|
| <b>Name</b>         | Crypto_OperationModeType |
| <b>Kind</b>         | Type                     |
| <b>Derived from</b> | uint8                    |



△

|                      |   |      |   |
|----------------------|---|------|---|
| <b>Range</b>         | CRYPTO_OPERATIONMODE_START  | 0x01 | Operation Mode is "Start". The job's state shall be reset, i.e. previous input data and intermediate results shall be deleted.  |
|                      | CRYPTO_OPERATIONMODE_UPDATE   | 0x02 | Operation Mode is "Update". Used to calculate intermediate results.   |
|                      | CRYPTO_OPERATIONMODE_STREAMSTART  | 0x03 | Operation Mode is "Stream Start". Mixture of "Start" and "Update". Used for streaming.  |
|                      | CRYPTO_OPERATIONMODE_FINISH   | 0x04 | Operation Mode is "Finish". The calculations shall be finalized.  |
|                      | CRYPTO_OPERATIONMODE_SINGLECALL   | 0x07 | Operation Mode is "Single Call". Mixture of "Start", "Update" and "Finish".   |
|                      | CRYPTO_OPERATIONMODE_SAVE_CONTEXT   | 0x08 | Operation mode is "Save workspace context". Context data shall be provided by the crypto driver to the application.   |
|                      | CRYPTO_OPERATIONMODE_RESTORE_CONTEXT  | 0x10 | Operation mode is "Restore workspace context". Application provides the context data that was previously stored and the crypto driver shall restore the internal workspace. |
| <b>Description</b>   | Enumeration which operation shall be performed. This enumeration is constructed from a bit mask, where the first bit indicates "Start", the second "Update" and the third "Finish". |      |   |
| <b>Variation</b>     | -   |      |   |
| <b>Available via</b> | Rte_Csm_Type.h  |      |   |

]

### [SWS\_Csm\_01024] Definition of ImplementationDataType Crypto\_VerifyResult Type [

|                      |  |      |  |
|----------------------|--|------|--|
| <b>Name</b>          | Crypto_VerifyResultType                                    |      |  |
| <b>Kind</b>          | Type   |      |  |
| <b>Derived from</b>  | uint8  |      |  |
| <b>Range</b>         | CRYPTO_E_VER_OK  | 0x00 | The result of the verification is "true", i.e. the two compared elements are identical. This return code shall be given as value "0"       |
|                      | CRYPTO_E_VER_NOT_OK  | 0x01 | The result of the verification is "false", i.e. the two compared elements are not identical. This return code shall be given as value "1". |
| <b>Description</b>   | Enumeration of the result type of verification operations. |      |  |
| <b>Variation</b>     | -  |      |  |
| <b>Available via</b> | Rte_Csm_Type.h   |      |  |

]

**[SWS\_Csm\_00828] Definition of ImplementationDataType Csm\_KeyData Type\_{Crypto} [**

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_KeyDataType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | max({ecuc(Csm/CsmKeys/CsmKey/CsmKeyRef->CryIfKey/CryIfKeyRef->CryptoKey/CryptoKeyTypeRef->CryptoKeyType/CryptoKeyElementRef->CryptoKeyElement/CryptoKeyElementSize) Elements |                     |       |
| <b>Description</b>   | Array long enough to store any key element of the considered key   |                     |       |
| <b>Variation</b>     | Crypto = {ecuc(Csm/CsmKeys/CsmKey.SHORT-NAME)}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

**[SWS\_Csm\_91044] Definition of ImplementationDataType Crypto\_ResultType**

 Upstream requirements: [SRS\\_CryptoStack\\_00095](#)

[

|                      |  |      |  |
|----------------------|--|------|--|
| <b>Name</b>          | Crypto_ResultType                          |      |  |
| <b>Kind</b>          | Type                                       |      |  |
| <b>Derived from</b>  | uint8                                      |      |  |
| <b>Range</b>         | E_OK                                       | 0x00 | The service request is successful.   |
|                      | E_NOT_OK                                   | 0x01 | The service request failed.  |
|                      | CRYPTO_E_BUSY                              | 0x02 | The service request failed because the service is still busy                               |
|                      | CRYPTO_E_ENTROPY_EXHAUSTED                 | 0x04 | The service request failed because the entropy of the random number generator is exhausted |
|                      | CRYPTO_E_KEY_READ_FAIL                     | 0x06 | The service request failed because read access was denied                                  |
|                      | CRYPTO_E_KEY_WRITE_FAIL                    | 0x07 | The service request failed because the writing access failed                               |
|                      | CRYPTO_E_KEY_NOT_AVAILABLE                 | 0x08 | The service request failed because the key is not available                                |
|                      | CRYPTO_E_KEY_NOT_VALID                     | 0x09 | The service request failed because the key is invalid.                                     |
|                      | CRYPTO_E_KEY_SIZE_MISMATCH                 | 0x0A | The service request failed because the key size does not match.                            |
|                      | CRYPTO_E_JOB_CANCELED                      | 0x0C | The service request failed because the Job has been canceled.                              |
|                      | CRYPTO_E_KEY_EMPTY                         | 0x0D | The service request failed because of uninitialized source key element.                    |
|                      | CRYPTO_E_CUSTOM_ERROR                      | 0x0E | Custom processing failed.  |
| <b>Description</b>   | Return for Std_ReturnType for Cryptostack. |      |  |
| <b>Variation</b>     | -  |      |  |
| <b>Available via</b> | Rte_Csm_Type.h                             |      |  |

]

### [SWS\_Csm\_01920] Definition of ImplementationDataType Csm\_HashData Type\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_HashDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmHash/CsmHashConfig/CsmHashDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data which shall be hashed.                   |                     |       |
| <b>Variation</b>     | Crypto={ecuc/Csm/CsmPrimitives.SHORT-NAME}                                   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_00912] Definition of ImplementationDataType Csm\_HashResult Type\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_HashResultType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmHash/CsmHashConfig/CsmHashResultLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the hash.                            |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}                                 |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_00935] Definition of ImplementationDataType Csm\_MacGenerate DataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_MacGenerateDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmMacGenerate/CsmMacGenerateConfig/CsmMacGenerateDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data from which a MAC shall be generated.                          |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_00927] Definition of ImplementationDataType Csm\_MacGenerateResultType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_MacGenerateResultType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmMacGenerate/CsmMacGenerateConfig/CsmMacGenerateResultLength) Elements} |                     |       |
| <b>Description</b>   | Array long enough to store the data of the MAC.   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_00802] Definition of ImplementationDataType Csm\_MacVerifyDataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_MacVerifyDataType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmMacVerify/CsmMacVerifyConfig/CsmMacVerifyDataMaxLength) Elements} |                     |       |
| <b>Description</b>   | Array long enough to store the data for whichs MAC shall be verified.                        |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_00803] Definition of ImplementationDataType Csm\_MacVerifyCompareType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_MacVerifyCompareType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmMacVerify/CsmMacVerifyConfig/CsmMacVerifyCompareLength)/8 Elements} |                     |       |
| <b>Description</b>   | Array long enough to store a MAC to be verified.   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01921] Definition of ImplementationDataType Csm\_EncryptData Type\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_EncryptDataType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmEncrypt/CsmEncryptConfig/CsmEncryptDataMaxLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data to be encrypted.                                   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01922] Definition of ImplementationDataType Csm\_EncryptResult Type\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_EncryptResultType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmEncrypt/CsmEncryptConfig/CsmEncryptResultMaxLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the cipher.                                       |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01923] Definition of ImplementationDataType Csm\_DecryptData Type\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_DecryptDataType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmDecrypt/CsmDecryptConfig/CsmDecryptDataMaxLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data to be decrypted.                                   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]



### [SWS\_Csm\_01924] Definition of ImplementationDataType Csm\_DecryptResultType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_DecryptResultType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmDecrypt/CsmDecryptConfig/CsmDecryptResultMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the decrypted plaintext.                         |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_01925] Definition of ImplementationDataType Csm\_AEADEncryptPlaintextType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADEncryptPlaintextType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmAEADEncrypt/CsmAEADEncryptConfig/CsmAEADEncryptPlaintextMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the plaintext to be encrypted with AEAD.                                    |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01928] Definition of ImplementationDataType Csm\_AEADEncryptAssociatedDataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_AEADEncryptAssociatedDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmAEADEncrypt/CsmAEADEncryptConfig/CsmAEADEncryptAssociatedDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the header.  |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_01927] Definition of ImplementationDataType Csm\_AEADEncryptCiphertextType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADEncryptCiphertextType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmAEADEncrypt/CsmAEADEncryptConfig/CsmAEADEncryptCiphertextMaxLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the cipher.   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01926] Definition of ImplementationDataType Csm\_AEADEncryptTagType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADEncryptTagType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmAEADEncrypt/CsmAEADEncryptConfig/CsmAEADEncryptTagLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the Tag.  |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_00922] Definition of ImplementationDataType Csm\_AEADDecryptCiphertextType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADDecryptCiphertextType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmAEADDecrypt/CsmAEADDecryptConfig/CsmAEADDecryptCiphertextMaxLength)} Elements |                     |       |
| <b>Description</b>   | Array long enough to store the ciphertext to be decrypted with AEAD.                       |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_00923] Definition of ImplementationDataType Csm\_AEADDecryptAssociatedDataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_AEADDecryptAssociatedDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmAEADDecrypt/CsmAEADDecryptConfig/CsmAEADDecryptAssociatedDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the header.  |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_01074] Definition of ImplementationDataType Csm\_AEADDecryptTagType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADDecryptTagType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | (((ecuc(Csm/CsmPrimitives/CsmAEADDecrypt/CsmAEADDecryptConfig/CsmAEADDecryptTagLength))+7)/8) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the Tag.  |                     |       |
| <b>Variation</b>     | Crypto = {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01075] Definition of ImplementationDataType Csm\_AEADDecryptPlaintextType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_AEADDecryptPlaintextType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmAEADDecrypt/CsmAEADDecryptConfig/CsmAEADDecryptPlaintextMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the plaintext.  |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01083] Definition of ImplementationDataType Csm\_SignatureGenerateDataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_SignatureGenerateDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmSignatureGenerate/CsmSignatureGenerateConfig/CsmSignatureGenerateDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data from which the signature shall be generated.                                    |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_01077] Definition of ImplementationDataType Csm\_SignatureGenerateResultType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |                     |       |
|----------------------|--|---------------------|-------|
| <b>Name</b>          | Csm_SignatureGenerateResultType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array  | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmSignatureGenerate/CsmSignatureGenerateConfig/CsmSignatureGenerateResultLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the signature and its length.   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}  |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h   |                     |       |

]

### [SWS\_Csm\_01078] Definition of ImplementationDataType Csm\_SignatureVerifyDataType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_SignatureVerifyDataType_{Crypto}  |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmSignatureVerify/CsmSignatureVerifyConfig/CsmSignatureVerifyDataMaxLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data for whichs signature shall be verified.                                   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_01079] Definition of ImplementationDataType Csm\_SignatureVerifyCompareType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_SignatureVerifyCompareType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmSignatureVerify/CsmSignatureVerifyConfig/CsmSignatureVerifyCompareLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store a signature to be verified.  |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_00930] Definition of ImplementationDataType Csm\_RandomGenerateResultType\_{Crypto}

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |   |                     |       |
|----------------------|---|---------------------|-------|
| <b>Name</b>          | Csm_RandomGenerateResultType_{Crypto}   |                     |       |
| <b>Kind</b>          | Array   | <b>Element type</b> | uint8 |
| <b>Size</b>          | {ecuc(Csm/CsmPrimitives/CsmRandomGenerate/CsmRandomGenerateConfig/CsmRandomGenerateResultLength) Elements |                     |       |
| <b>Description</b>   | Array long enough to store the data of the random number.   |                     |       |
| <b>Variation</b>     | Crypto= {ecuc/Csm/CsmPrimitives.SHORT-NAME}   |                     |       |
| <b>Available via</b> | Rte_Csm_Type.h  |                     |       |

]

### [SWS\_Csm\_91045] Definition of ImplementationDataType Csm\_LengthPtr

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |  |  |
|----------------------|--|--|--|
| <b>Name</b>          | Csm_LengthPtr  |  |  |
| <b>Kind</b>          | Pointer  |  |  |
| <b>Type</b>          | uint32*  |  |  |
| <b>Description</b>   | ImplementationDataType of category DATA_REFERENCE with the pointer target uint32 to be able to return asynchronously the length. |  |  |
| <b>Variation</b>     | -  |  |  |
| <b>Available via</b> | Rte_Csm_Type.h   |  |  |

]

**[SWS\_Csm\_91046] Definition of ImplementationDataType Csm\_VerifyResultPtr**

 Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                      |  |
|----------------------|--|
| <b>Name</b>          | Csm_VerifyResultPtr  |
| <b>Kind</b>          | Pointer  |
| <b>Type</b>          | <a href="#">Crypto_VerifyResultType*</a>   |
| <b>Description</b>   | ImplementationDataType of category DATA_REFERENCE with the pointer target Crypto_VerifyResultType to be able to return asynchronously the verify result. |
| <b>Variation</b>     | –  |
| <b>Available via</b> | Rte_Csm_Type.h   |

]

**[SWS\_Csm\_91102] Definition of ImplementationDataType Crypto\_KeyStatus Type** [

|                      |                                     |      |  |
|----------------------|-------------------------------------|------|--|
| <b>Name</b>          | Crypto_KeyStatusType                |      |  |
| <b>Kind</b>          | Type                                |      |  |
| <b>Derived from</b>  | uint8                               |      |  |
| <b>Range</b>         | CRYPTO_KEYSTATUS_INVALID            | 0x00 | The status of the key is invalid (for example after Csm_KeyElement Set the Csm_KeySetValid was not called).  |
|                      | CRYPTO_KEYSTATUS_VALID              | 0x01 | The status of the key is valid (for example the status was successfully set by the Csm_KeySetValid).   |
|                      | CRYPTO_KEYSTATUS_UPDATE_IN_PROGRESS | 0x02 | Indicates that the NV RAM Block that is assigned to this key are currently being updated. The update operation is in progress and has not yet been completed by NVM. |
| <b>Description</b>   | Enumeration for key status.         |      |  |
| <b>Variation</b>     | –                                   |      |  |
| <b>Available via</b> | Rte_Csm_Type.h                      |      |  |

]

### 8.7.7 Ports

#### [SWS\_Csm\_01042] Definition of Port CsmKey\_{Key} provided by module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00090](#), [SRS\\_CryptoStack\\_00091](#)

[

|                                       |   |                                     |  |
|---------------------------------------|---|-------------------------------------|--|
| <b>Name</b>                           | CsmKey_{Key}  |                                     |  |
| <b>Kind</b>                           | ProvidedPort  | <b>Interface</b>                    | <a href="#">CsmKeyManagement_{Key}</a> |
| <b>Description</b>                    | Port related to a specific cryptographic key to execute the key management functions synchronously. |                                     |  |
| <b>Port Defined Argument Value(s)</b> | <b>Type</b>   | uint32                              |  |
|                                       | <b>Value</b>  | {ecuc(Csm/CsmKeys/CsmKey/CsmKeyId)} |  |
| <b>Variation</b>                      | {ecuc(Csm/CsmKeys/CsmKey.CsmKeyUsePort)} == TRUE<br>Key = {ecuc(Csm/CsmKeys/CsmKey.SHORT-NAME)}     |                                     |  |

]

#### [SWS\_Csm\_91023] Definition of Port CsmJob\_{Job} provided by module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00090](#), [SRS\\_CryptoStack\\_00091](#)

[

|                                       |  |  |   |
|---------------------------------------|--|--|---|
| <b>Name</b>                           | CsmJob_{Job}   |  |   |
| <b>Kind</b>                           | ProvidedPort   | <b>Interface</b>                         | <a href="#">CsmHash_{PrimitiveCfg}</a> , <a href="#">CsmMacGenerate_{PrimitiveCfg}</a> , <a href="#">CsmMacVerify_{PrimitiveCfg}</a> , <a href="#">CsmEncrypt_{PrimitiveCfg}</a> , <a href="#">CsmDecrypt_{PrimitiveCfg}</a> , <a href="#">CsmAEADEncrypt_{PrimitiveCfg}</a> , <a href="#">CsmAEADDecrypt_{PrimitiveCfg}</a> , <a href="#">CsmSignatureGenerate_{PrimitiveCfg}</a> , <a href="#">CsmSignatureVerify_{PrimitiveCfg}</a> , <a href="#">CsmRandomGenerate_{PrimitiveCfg}</a> |
| <b>Description</b>                    | Port related to a specific cryptographic job to execute the assigned cryptographic calculations synchronously.   |  |   |
| <b>Port Defined Argument Value(s)</b> | <b>Type</b>  | uint32                                   |   |
|                                       | <b>Value</b>   | {ecuc(Csm/CsmJobs/CsmJob.CsmJobId)}      |   |
|                                       | <b>Type</b>  | <a href="#">Crypto_OperationModeType</a> |   |
|                                       | <b>Value</b>   | CRYPTO_OPERATIONMODE_SINGLECALL          |   |
| <b>Variation</b>                      | ({ecuc(Csm/CsmJobs/CsmJob.CsmJobInterfaceUsePort)} == CRYPTO_USE_PORT) &&<br>({ecuc(Csm/CsmJobs/CsmJob.CsmJobPrimitiveRef)} != NULL)<br>Job = {ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)}<br>Primitive = {ecuc(Csm/CsmJobs/CsmJob.CsmJobPrimitiveRef->CsmPrimitives/*.SHORT-NAME)}<br>PrimitiveCfg = {ecuc(Csm/CsmPrimitives/{Primitive})/{Primitive}Config.SHORT-NAME)} |  |   |

]

### [SWS\_Csm\_91062] Definition of Port CsmJob\_{Job} provided by module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00090](#), [SRS\\_CryptoStack\\_00091](#)

[

|                                       |  |                                     |  |
|---------------------------------------|--|-------------------------------------|--|
| <b>Name</b>                           | CsmJob_{Job}   |                                     |  |
| <b>Kind</b>                           | ProvidedPort   | <b>Interface</b>                    | CsmCustom, CsmHash, CsmMacGenerate, CsmMacVerify, CsmEncrypt, CsmDecrypt, CsmAEADEncrypt, CsmAEADDecrypt, CsmSignatureGenerate, CsmSignatureVerify |
| <b>Description</b>                    | Port related to a specific cryptographic job to execute the assigned cryptographic calculations synchronously or asynchronously. |                                     |  |
| <b>Port Defined Argument Value(s)</b> | <b>Type</b>  | uint32                              |  |
|                                       | <b>Value</b>   | {ecuc(Csm/CsmJobs/CsmJob.CsmJobId)} |  |
|                                       | <b>Type</b>  | Crypto_OperationModeType            |  |
|                                       | <b>Value</b>   | CRYPTO_OPERATIONMODE_SINGLECALL     |  |
| <b>Variation</b>                      | ({ecuc(Csm/CsmJobs/CsmJob.CsmJobInterfaceUsePort)} == CRYPTO_USE_PORT_OPTIMIZED)<br>Job = {ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)}  |                                     |  |

]

### [SWS\_Csm\_91112] Definition of Port CsmJob\_{Job} provided by module Csm

Upstream requirements: [SRS\\_CryptoStack\\_00090](#), [SRS\\_CryptoStack\\_00091](#)

[

|                                       |  |                                     |   |
|---------------------------------------|--|-------------------------------------|---|
| <b>Name</b>                           | CsmJob_{Job}   |                                     |   |
| <b>Kind</b>                           | ProvidedPort   | <b>Interface</b>                    | CsmJobKeySetInvalid, CsmJobKeyUnwrap, CsmJobKeyWrap, CsmRandomGenerate, CsmJobKeyDerive, CsmJobKeyExchangeCalcPubVal, CsmJobKeyExchangeCalcSecret, CsmJobKeyGenerate, CsmJobKeySetValid, CsmJobRandomSeed |
| <b>Description</b>                    | Port related to a specific cryptographic job to execute the assigned cryptographic calculations synchronously or asynchronously (no Operation Mode). |                                     |   |
| <b>Port Defined Argument Value(s)</b> | <b>Type</b>  | uint32                              |   |
|                                       | <b>Value</b>   | {ecuc(Csm/CsmJobs/CsmJob.CsmJobId)} |   |
| <b>Variation</b>                      | ({ecuc(Csm/CsmJobs/CsmJob.CsmJobInterfaceUsePort)} == CRYPTO_USE_PORT_OPTIMIZED)<br>Job = {ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)}                      |                                     |   |

]



**[SWS\_Csm\_00934] Definition of Port CallbackNotification\_{Job} required by module Csm**

Upstream requirements: [SRS\\_CryptoStack\\_00090](#), [SRS\\_CryptoStack\\_00091](#)

[

|                    |   |                  |                                      |
|--------------------|---|------------------|--------------------------------------|
| <b>Name</b>        | CallbackNotification_{Job}  |                  |                                      |
| <b>Kind</b>        | RequiredPort  | <b>Interface</b> | <a href="#">CallbackNotification</a> |
| <b>Description</b> | Port for the callback notification.   |                  |                                      |
| <b>Variation</b>   | ({ecuc(Csm/CsmJobs/CsmJob.CsmProcessingMode)}==CRYPTO_PROCESSING_ ASYN)&&(CsmJob/CsmJobInterfaceUsePort!=CRYPTO_USE_FNC)<br>Job = {ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)} |                  |                                      |

]

**[SWS\_Csm\_91105] Definition of Port CsmContext\_{Job} provided by module Csm**

Upstream requirements: [SRS\\_CryptoStack\\_00090](#)

[

|                                       |   |                                     |   |
|---------------------------------------|---|-------------------------------------|---|
| <b>Name</b>                           | CsmContext_{Job}  |                                     |   |
| <b>Kind</b>                           | ProvidedPort  | <b>Interface</b>                    | <a href="#">CsmContextService_{Job}</a> |
| <b>Description</b>                    | Port related to context data operation.   |                                     |   |
| <b>Port Defined Argument Value(s)</b> | <b>Type</b>   | uint32                              |   |
|                                       | <b>Value</b>  | {ecuc(Csm/CsmJobs/CsmJob.CsmJobId)} |   |
| <b>Variation</b>                      | {ecuc(Csm/CsmJobs/CsmJob.CsmJobServiceInterfaceContextUsePort)} == CRYPTO_USE_PORT<br>Job={ecuc(Csm/CsmJobs/CsmJob.SHORT-NAME)} |                                     |   |


]

## 9 Sequence diagrams

The following sequence diagrams concentrate on the interaction between the CSM module and software components respectively the ECU state manager.

### 9.1 Asynchronous Calls


The following diagram (Sequence diagram for asynchronous call) shows a sample sequence of function calls for a request performed asynchronously. The result of the asynchronous function can be accessed after an asynchronous notification (invocation of the configured callback function).

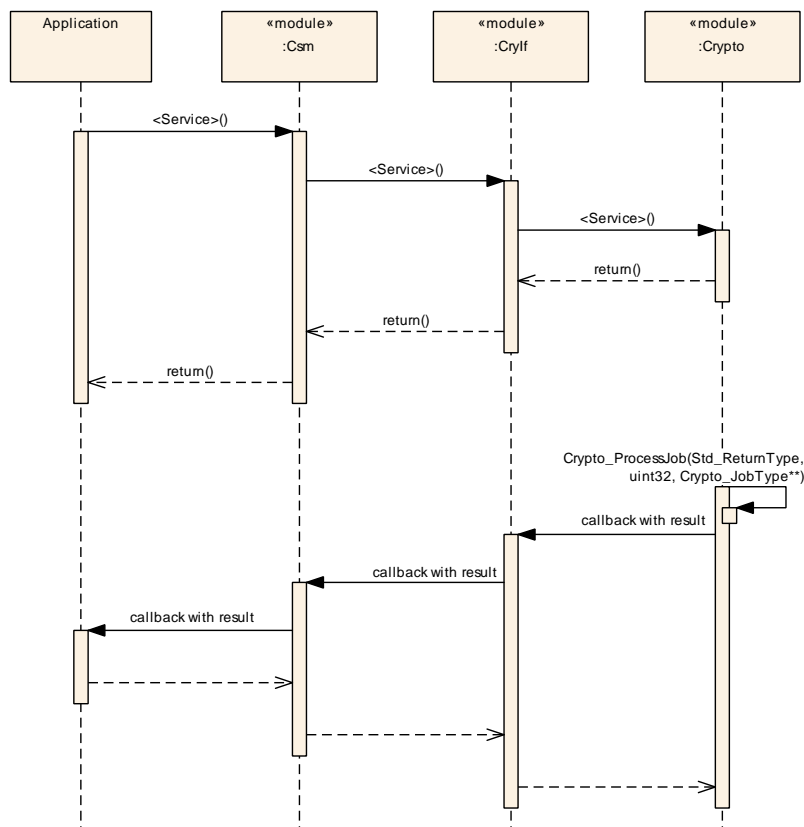

**Figure 9.1: Sequence Diagram for Asynchronous Call with Callback**

### 9.2 Synchronous Calls

The following diagram (Sequence diagram for synchronous calls) shows a sample sequence of function calls with the scheduler for a request performed synchronously.

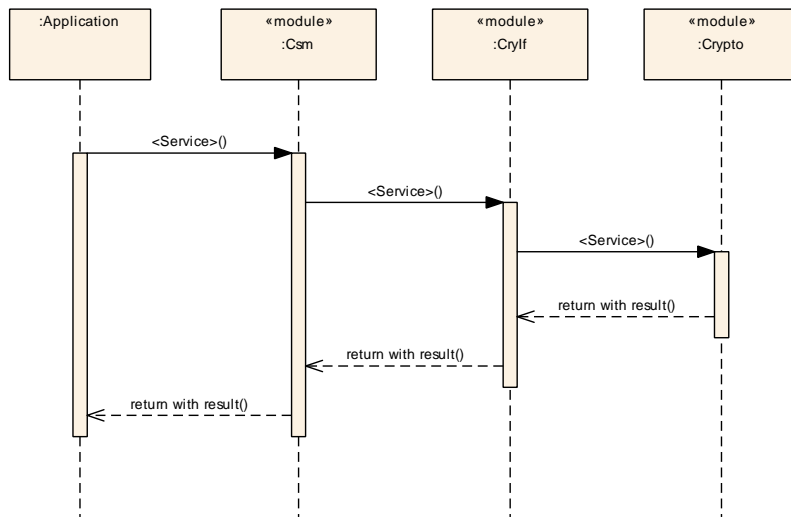

**Figure 9.2: Sequence Diagram for Synchronous Call**

## 10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module Csm.

Chapter 10.3 specifies published information of the module Csm.

### 10.1 How to read this chapter

For details refer to the chapter 10.1 “Introduction to configuration specification” in [6].

### 10.2 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe Chapter 7 and Chapter 8.

### 10.2.1 Csm

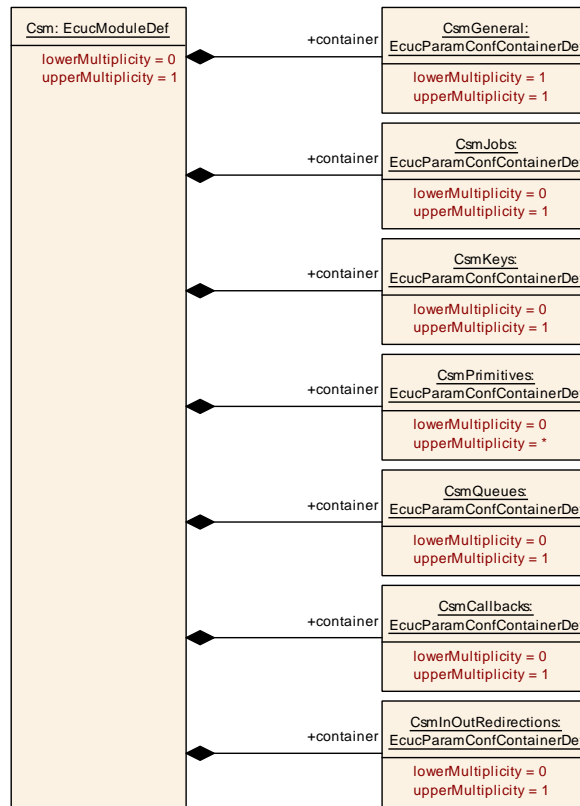


Figure 10.1: Crypto Service Manager Layout

#### [ECUC\_Csm\_00818] Definition of EcucModuleDef Csm [

|                                   |   |
|-----------------------------------|---|
| <b>Module Name</b>                | Csm   |
| <b>Description</b>                | Configuration of the Csm (CryptoServiceManager) module. |
| <b>Post-Build Variant Support</b> | false   |
| <b>Supported Config Variants</b>  | VARIANT-PRE-COMPILE                                     |

| Included Containers  |              |   |
|----------------------|--------------|---|
| Container Name       | Multiplicity | Scope / Dependency  |
| CsmCallbacks         | 0..1         | Container for callback function configurations  |
| CsmGeneral           | 1            | Container for common configuration options.   |
| CsmInOutRedirections | 0..1         | Configuration for CSM redirection configurations  |
| CsmJobs              | 0..1         | Container for configuration of CSM jobs.  |
| CsmKeys              | 0..1         | Container for CSM key configurations.   |
| CsmMainFunction      | 0..*         | Each element of this container defines one instance of Csm_MainFunction. For each partition, where the Csm module shall be instantiated, at least one MainFunction instance needs to be configured. |
| CsmPrimitives        | 0..*         | Container for configuration of CsmPrimitives  |
| CsmQueues            | 0..1         | Container for CSM queue configurations  |

]

## 10.2.2 CsmGeneral

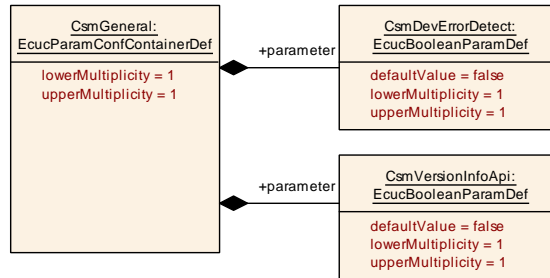


Figure 10.2: Crypto Service Manager General Layout

### [ECUC\_Csm\_00002] Definition of EcucParamConfContainerDef CsmGeneral [

|   |   |   |              |
|---|---|---|--------------|
| <b>Container Name</b>                   | CsmGeneral                                  |   |              |
| <b>Parent Container</b>                 | Csm   |   |              |
| <b>Description</b>                      | Container for common configuration options. |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | – |              |
|   | <b>Post-build time</b>                      | – |              |
| <b>Configuration Parameters</b>         |   |   |              |

| Included Parameters |              |                  |
|---------------------|--------------|------------------|
| Parameter Name      | Multiplicity | ECUC ID          |
| CsmDevErrorDetect   | 1            | [ECUC_Csm_00001] |
| CsmVersionInfoApi   | 1            | [ECUC_Csm_00003] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00001] Definition of EcucBooleanParamDef CsmDevErrorDetect [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmDevErrorDetect   |   |              |
| <b>Parent Container</b>                 | CsmGeneral  |   |              |
| <b>Description</b>                      | Switches the development error detection and notification on or off. <ul style="list-style-type: none"> <li>• true: detection and notification is enabled.</li> <li>• false: detection and notification is disabled.</li> </ul> |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucBooleanParamDef   |   |              |
| <b>Default value</b>                    | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |





|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |


]

**[ECUC\_Csm\_00003] Definition of EcucBooleanParamDef CsmVersionInfoApi [**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmVersionInfoApi   |   |              |
| <b>Parent Container</b>                 | CsmGeneral  |   |              |
| <b>Description</b>                      | Pre-processor switch to enable and disable availability of the API Csm_GetVersionInfo(). True: API Csm_GetVersionInfo() is available. False: API Csm_GetVersionInfo() is not available. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucBooleanParamDef   |   |              |
| <b>Default value</b>                    | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**10.2.3 CsmMainFunction**

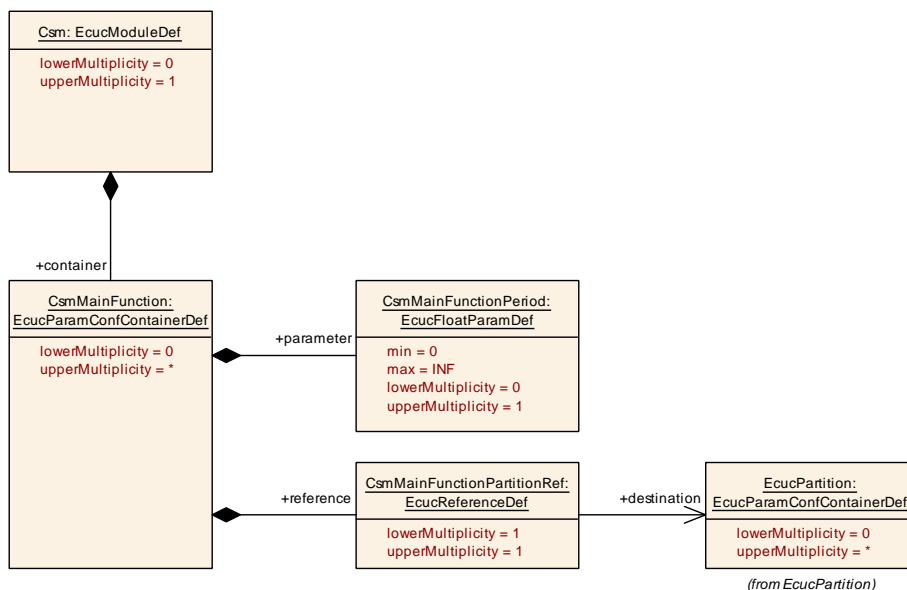

**Figure 10.3: Crypto Service Manager MainFunction Layout**

### [ECUC\_Csm\_00279] Definition of EcucParamConfContainerDef CsmMainFunction

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmMainFunction   |
| <b>Parent Container</b>         | <a href="#">Csm</a>   |
| <b>Description</b>              | Each element of this container defines one instance of Csm_MainFunction. For each partition, where the Csm module shall be instantiated, at least one MainFunction instance needs to be configured. |
| <b>Configuration Parameters</b> |   |

| Included Parameters                         |              |                                    |
|---|--------------|------------------------------------|
| Parameter Name                              | Multiplicity | ECUC ID                            |
| <a href="#">CsmMainFunctionPeriod</a>       | 0..1         | [ <a href="#">ECUC_Csm_00113</a> ] |
| <a href="#">CsmMainFunctionPartitionRef</a> | 1            | [ <a href="#">ECUC_Csm_00280</a> ] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00113] Definition of EcucFloatParamDef CsmMainFunctionPeriod

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmMainFunctionPeriod  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMainFunction</a>                                    |   |              |
| <b>Description</b>                      | Specifies the period of main function Csm_MainFunction in seconds. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucFloatParamDef  |   |              |
| <b>Range</b>                            | ]0 .. INF[   |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00280] Definition of EcucReferenceDef CsmMainFunctionPartitionRef

|                         |  |
|-------------------------|--|
| <b>Parameter Name</b>   | CsmMainFunctionPartitionRef  |
| <b>Parent Container</b> | <a href="#">CsmMainFunction</a>  |
| <b>Description</b>      | Reference to EcucPartition, where the according CsmMainFunction instance is assigned to. |






△

|                                  |                            |   |              |
|----------------------------------|----------------------------|---|--------------|
| <b>Multiplicity</b>              | 1                          |   |              |
| <b>Type</b>                      | Reference to EcucPartition |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>    | X | All Variants |
|                                  | <b>Link time</b>           | - |              |
|                                  | <b>Post-build time</b>     | - |              |
| <b>Scope / Dependency</b>        | scope: local               |   |              |

└

**10.2.4 CsmJobs**

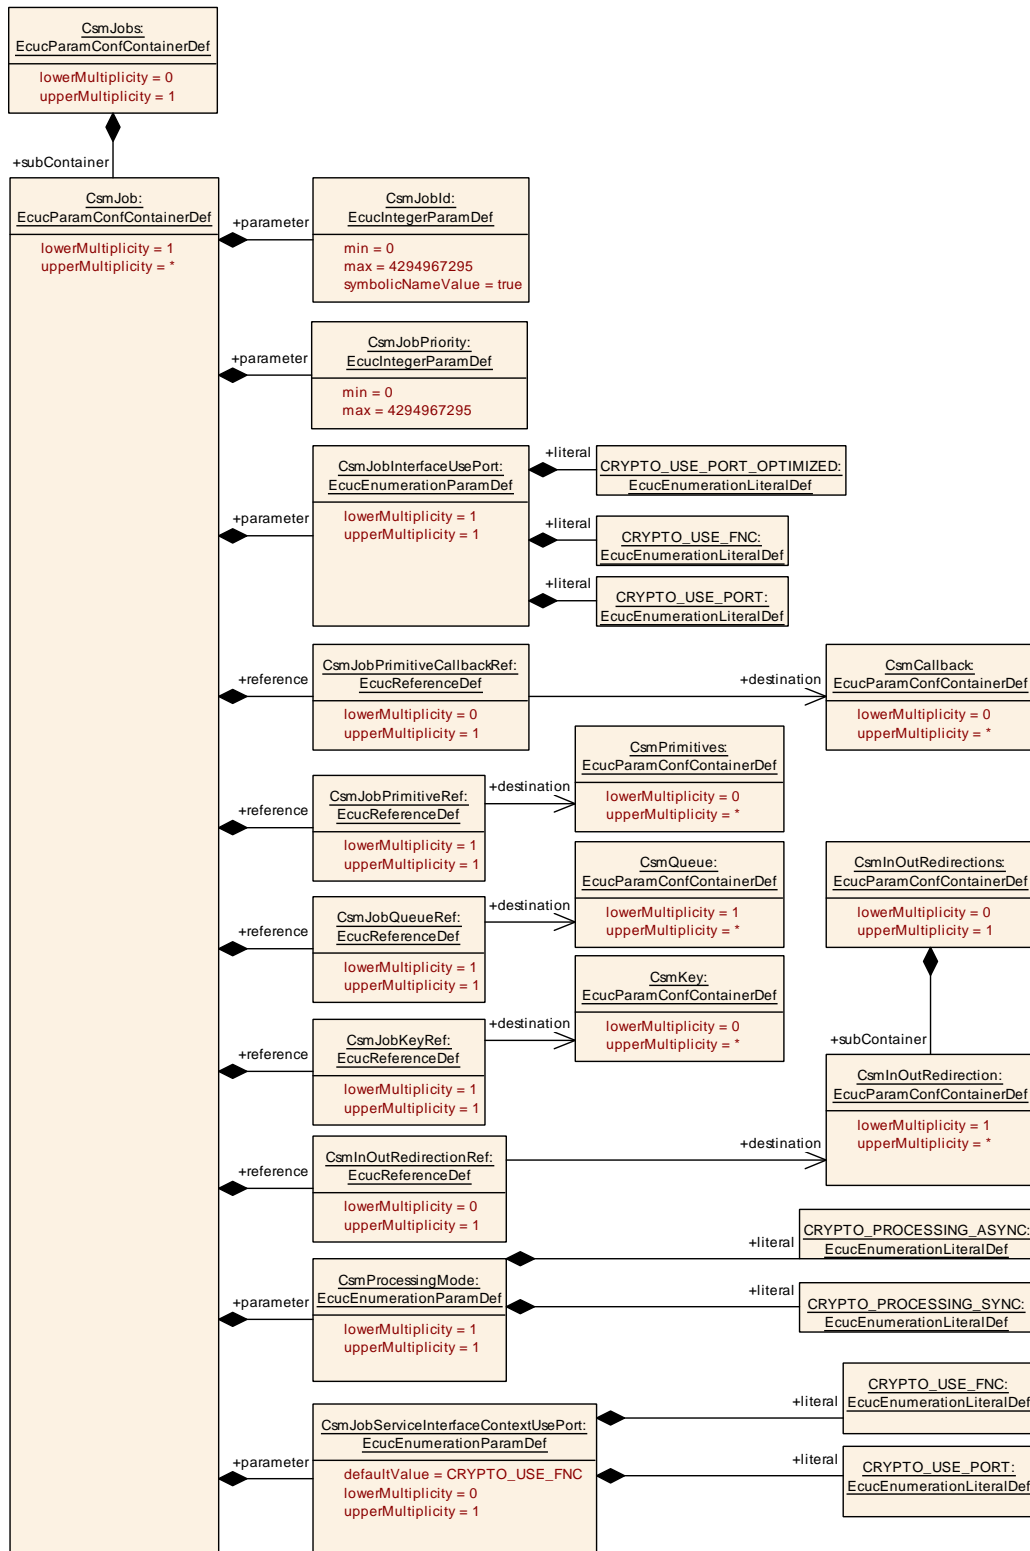

**Figure 10.4: CsmJobs Layout**

**[ECUC\_Csm\_00112] Definition of EcucParamConfContainerDef CsmJobs [**

|   |  |   |              |
|---|--|---|--------------|
| <b>Container Name</b>                   | CsmJobs                                  |   |              |
| <b>Parent Container</b>                 | <a href="#">Csm</a>                      |   |              |
| <b>Description</b>                      | Container for configuration of CSM jobs. |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                  | X | All Variants |
|   | <b>Link time</b>                         | – |              |
|   | <b>Post-build time</b>                   | – |              |
| <b>Configuration Parameters</b>         |  |   |              |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| <b>Included Containers</b> |                     |   |
|----------------------------|---------------------|---|
| <b>Container Name</b>      | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">CsmJob</a>     | 1..*                | Container for configuration of CSM job. The container name serves as a symbolic name for the identifier of a job configuration. |

]

**10.2.5 CsmJob**
**[ECUC\_Csm\_00118] Definition of EcucParamConfContainerDef CsmJob [**

|   |   |   |              |
|---|---|---|--------------|
| <b>Container Name</b>                   | CsmJob  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobs</a>   |   |              |
| <b>Description</b>                      | Container for configuration of CSM job. The container name serves as a symbolic name for the identifier of a job configuration. |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Configuration Parameters</b>         |   |   |              |

| <b>Included Parameters</b>                           |                     |                                  |
|--|---------------------|----------------------------------|
| <b>Parameter Name</b>                                | <b>Multiplicity</b> | <b>ECUC ID</b>                   |
| <a href="#">CsmJobId</a>                             | 1                   | <a href="#">[ECUC_Csm_00119]</a> |
| <a href="#">CsmJobInterfaceUsePort</a>               | 1                   | <a href="#">[ECUC_Csm_00275]</a> |
| <a href="#">CsmJobPriority</a>                       | 1                   | <a href="#">[ECUC_Csm_00120]</a> |
| <a href="#">CsmJobServiceInterfaceContextUsePort</a> | 0..1                | <a href="#">[ECUC_Csm_00327]</a> |
| <a href="#">CsmProcessingMode</a>                    | 1                   | <a href="#">[ECUC_Csm_00276]</a> |
| <a href="#">CsmInOutRedirectionRef</a>               | 0..1                | <a href="#">[ECUC_Csm_00263]</a> |
| <a href="#">CsmJobKeyRef</a>                         | 1                   | <a href="#">[ECUC_Csm_00126]</a> |
| <a href="#">CsmJobPrimitiveCallbackRef</a>           | 0..1                | <a href="#">[ECUC_Csm_00123]</a> |
| <a href="#">CsmJobPrimitiveRef</a>                   | 1                   | <a href="#">[ECUC_Csm_00122]</a> |
| <a href="#">CsmJobQueueRef</a>                       | 1                   | <a href="#">[ECUC_Csm_00125]</a> |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00119] Definition of EcucIntegerParamDef CsmJobId [**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobId  |   |              |
| <b>Parent Container</b>                 | CsmJob  |   |              |
| <b>Description</b>                      | Identifier of the CSM job. The set of actually configured identifiers shall be consecutive and gapless. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef (Symbolic Name generated for this parameter)  |   |              |
| <b>Range</b>                            | 0 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00275] Definition of EcucEnumerationParamDef CsmJobInterface UsePort [**

|                                  |                                   |   |                         |
|----------------------------------|-----------------------------------|---|-------------------------|
| <b>Parameter Name</b>            | CsmJobInterfaceUsePort            |   |                         |
| <b>Parent Container</b>          | CsmJob                            |   |                         |
| <b>Description</b>               | Does the job need RTE interfaces? |   |                         |
| <b>Multiplicity</b>              | 1                                 |   |                         |
| <b>Type</b>                      | EcucEnumerationParamDef           |   |                         |
| <b>Range</b>                     | CRYPTO_USE_FNC                    |   | Port is not used.       |
|                                  | CRYPTO_USE_PORT                   |   | Port is used.           |
|                                  | CRYPTO_USE_PORT_OPTIMIZED         |   | DATA_REFERENCE is used. |
| <b>Post-Build Variant Value</b>  | false                             |   |                         |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>           | X | All Variants            |
|                                  | <b>Link time</b>                  | - |                         |
|                                  | <b>Post-build time</b>            | - |                         |
| <b>Scope / Dependency</b>        | scope: local                      |   |                         |

]

**[ECUC\_Csm\_00120] Definition of EcucIntegerParamDef CsmJobPriority [**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobPriority  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJob</a>  |   |              |
| <b>Description</b>                      | Priority of the job. The higher the value, the higher the job's priority. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 0 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00327] Definition of EcucEnumerationParamDef CsmJobServiceInterfaceContextUsePort [**

|   |   |   |                                  |
|---|---|---|----------------------------------|
| <b>Parameter Name</b>                   | CsmJobServiceInterfaceContextUsePort                    |   |                                  |
| <b>Parent Container</b>                 | <a href="#">CsmJob</a>                                  |   |                                  |
| <b>Description</b>                      | Does the job need RTE interfaces for context operations |   |                                  |
| <b>Multiplicity</b>                     | 0..1  |   |                                  |
| <b>Type</b>                             | EcucEnumerationParamDef                                 |   |                                  |
| <b>Range</b>                            | CRYPTO_USE_FNC  |   | Port is not used.                |
|   | CRYPTO_USE_PORT   |   | Port is used for this operation. |
| <b>Default value</b>                    | <a href="#">CRYPTO_USE_FNC</a>                          |   |                                  |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                 | X | All Variants                     |
|   | <b>Link time</b>  | - |                                  |
|   | <b>Post-build time</b>                                  | - |                                  |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                 | X | All Variants                     |
|   | <b>Link time</b>  | - |                                  |
|   | <b>Post-build time</b>                                  | - |                                  |
| <b>Scope / Dependency</b>               | scope: local  |   |                                  |

]

**[ECUC\_Csm\_00276] Definition of EcucEnumerationParamDef CsmProcessing Mode**

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmProcessingMode  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJob</a>   |   |              |
| <b>Description</b>               | Determines how the interface shall be used for that job. Synchronous processing returns with the result while asynchronous processing returns without processing the job. The caller will be notified by the corresponding callback. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef  |   |              |
| <b>Range</b>                     | CRYPTO_PROCESSING_ASYNC  | – |              |
|                                  | CRYPTO_PROCESSING_SYNC   | – |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

**[ECUC\_Csm\_00263] Definition of EcucReferenceDef CsmInOutRedirectionRef**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmInOutRedirectionRef                           |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJob</a>                           |   |              |
| <b>Description</b>                      | This parameter refers to the used redirection.   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmInOutRedirection</a> |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                          | X | All Variants |
|   | <b>Link time</b>                                 | – |              |
|   | <b>Post-build time</b>                           | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                          | X | All Variants |
|   | <b>Link time</b>                                 | – |              |
|   | <b>Post-build time</b>                           | – |              |
| <b>Scope / Dependency</b>               | scope: local                                     |   |              |

]

**[ECUC\_Csm\_00126] Definition of EcucReferenceDef CsmJobKeyRef**

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>Parameter Name</b>   | CsmJobKeyRef  |  |  |
| <b>Parent Container</b> | <a href="#">CsmJob</a>  |  |  |
| <b>Description</b>      | This parameter refers to the key which shall be used for the CsmPrimitive. It's possible to use a CsmKey for different jobs |  |  |
| <b>Multiplicity</b>     | 1   |  |  |
| <b>Type</b>             | Reference to <a href="#">CsmKey</a>   |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: A dummy key shall be referenced if the CsmPrimitive doesn't require a key (e.g. for Hash calculation). |   |              |

]

### [ECUC\_Csm\_00123] Definition of EcucReferenceDef CsmJobPrimitiveCallback Ref [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobPrimitiveCallbackRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJob</a>   |   |              |
| <b>Description</b>                      | This parameter refers to the used CsmCallback. The referred CsmCallback is called when the crypto job has been finished. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmCallback</a>   |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00122] Definition of EcucReferenceDef CsmJobPrimitiveRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobPrimitiveRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJob</a>  |   |              |
| <b>Description</b>                      | This parameter refers to the used CsmPrimitive. Different jobs may refer to one Csm Primitive. The referred CsmPrimitive provides detailed information on the actual cryptographic routine. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmPrimitives</a>  |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |





|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |


]

**[ECUC\_Csm\_00125] Definition of EcucReferenceDef CsmJobQueueRef** [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobQueueRef  |   |              |
| <b>Parent Container</b>                 | CsmJob  |   |              |
| <b>Description</b>                      | This parameter refers to the queue. The queue is used if the underlying crypto driver object is busy. The queue refers also to the channel which is used. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | Reference to CsmQueue   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**10.2.6 CsmKeys**

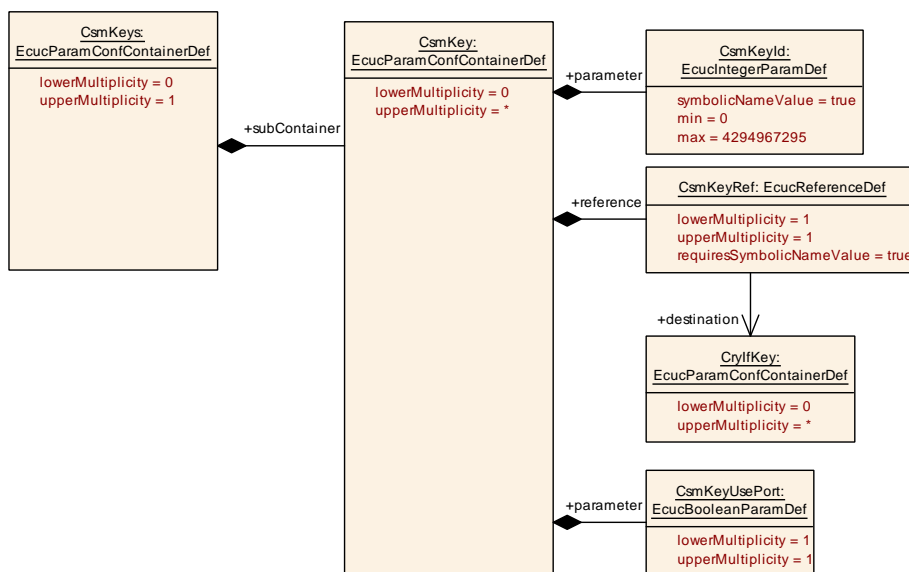

**Figure 10.5: Crypto Service Manager Keys Layout**



**[ECUC\_Csm\_00005] Definition of EcucParamConfContainerDef CsmKeys [**

|                                 |                                       |
|---------------------------------|---------------------------------------|
| <b>Container Name</b>           | CsmKeys                               |
| <b>Parent Container</b>         | <a href="#">Csm</a>                   |
| <b>Description</b>              | Container for CSM key configurations. |
| <b>Configuration Parameters</b> |                                       |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| <b>Included Containers</b> |                     |   |
|----------------------------|---------------------|---|
| <b>Container Name</b>      | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">CsmKey</a>     | 0..*                | Container for configuration of a CSM key. The container name serves as a symbolic name for the identifier of a key configuration. |

]

**10.2.7 CsmKey**
**[ECUC\_Csm\_00014] Definition of EcucParamConfContainerDef CsmKey [**

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmKey  |
| <b>Parent Container</b>         | <a href="#">CsmKeys</a>   |
| <b>Description</b>              | Container for configuration of a CSM key. The container name serves as a symbolic name for the identifier of a key configuration. |
| <b>Configuration Parameters</b> |   |

| <b>Included Parameters</b>    |                     |                                  |
|-------------------------------|---------------------|----------------------------------|
| <b>Parameter Name</b>         | <b>Multiplicity</b> | <b>ECUC ID</b>                   |
| <a href="#">CsmKeyId</a>      | 1                   | <a href="#">[ECUC_Csm_00015]</a> |
| <a href="#">CsmKeyUsePort</a> | 1                   | <a href="#">[ECUC_Csm_00127]</a> |
| <a href="#">CsmKeyRef</a>     | 1                   | <a href="#">[ECUC_Csm_00016]</a> |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00015] Definition of EcucIntegerParamDef CsmKeyId [**

|                         |  |
|-------------------------|--|
| <b>Parameter Name</b>   | CsmKeyId   |
| <b>Parent Container</b> | <a href="#">CsmKey</a>   |
| <b>Description</b>      | Identifier of the CsmKey. The set of actually configured identifiers shall be consecutive and gapless. |
| <b>Multiplicity</b>     | 1  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Type</b>                             | EcucIntegerParamDef (Symbolic Name generated for this parameter) |   |              |
| <b>Range</b>                            | 0 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00127] Definition of EcucBooleanParamDef CsmKeyUsePort [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmKeyUsePort   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmKey</a>  |   |              |
| <b>Description</b>                      | Does the key need RTE interfaces? True: RTE interfaces used for this key False: No RTE interfaces used for this key |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucBooleanParamDef   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00016] Definition of EcucReferenceDef CsmKeyRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmKeyRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmKey</a>   |   |              |
| <b>Description</b>                      | This parameter refers to the used CrylIfKey. The underlying CrylIfKey refers to a specific CryptoKey in the Crypto Driver. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CrylIfKey   |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |





|                           |                  |   |              |
|---------------------------|------------------|---|--------------|
| Value Configuration Class | Pre-compile time | X | All Variants |
|                           | Link time        | – |              |
|                           | Post-build time  | – |              |
| Scope / Dependency        | scope: local     |   |              |

]

### 10.2.8 CsmQueues

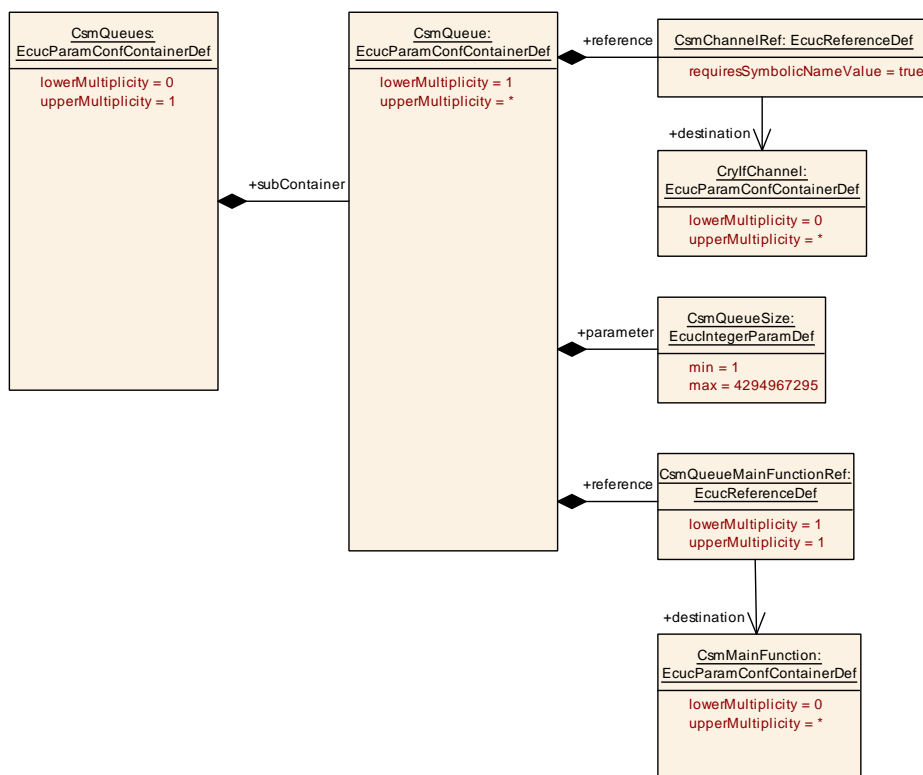


Figure 10.6: Crypto Service Manager Queues Layout

### [ECUC\_Csm\_00007] Definition of EcucParamConfContainerDef CsmQueues [

|                          |  |
|--------------------------|--|
| Container Name           | CsmQueues                              |
| Parent Container         | Csm                                    |
| Description              | Container for CSM queue configurations |
| Configuration Parameters |  |
| No Included Parameters   |  |

| Included Containers |              |  |
|---------------------|--------------|--|
| Container Name      | Multiplicity | Scope / Dependency   |
| CsmQueuee           | 1..*         | Container for configuration of a CSM queue. A queue has two tasks: 1. queue jobs which cannot be processed since the underlying hardware is busy and 2. refer to channel which shall be used |

]

## 10.2.9 CsmQueue

### [ECUC\_Csm\_00032] Definition of EcucParamConfContainerDef CsmQueue [

|                          |  |
|--------------------------|--|
| Container Name           | CsmQueue   |
| Parent Container         | CsmQueues  |
| Description              | Container for configuration of a CSM queue. A queue has two tasks: 1. queue jobs which cannot be processed since the underlying hardware is busy and 2. refer to channel which shall be used |
| Configuration Parameters |  |

| Included Parameters     |              |                  |  |
|-------------------------|--------------|------------------|--|
| Parameter Name          | Multiplicity | ECUC ID          |  |
| CsmQueueSize            | 1            | [ECUC_Csm_00034] |  |
| CsmChannelRef           | 1            | [ECUC_Csm_00033] |  |
| CsmQueueMainFunctionRef | 1            | [ECUC_Csm_00281] |  |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

### [ECUC\_Csm\_00034] Definition of EcucIntegerParamDef CsmQueueSize [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| Parameter Name                   | CsmQueueSize  |   |              |
| Parent Container                 | CsmQueue  |   |              |
| Description                      | Size of the CsmQueue. If jobs cannot be processed by the underlying hardware since the hardware is busy, the jobs stay in the prioritized queue. If the queue is full, the next job will be rejected. |   |              |
| Multiplicity                     | 1   |   |              |
| Type                             | EcucIntegerParamDef   |   |              |
| Range                            | 1 .. 4294967295   |   |              |
| Default value                    | -   |   |              |
| Post-Build Variant Value         | false   |   |              |
| Multiplicity Configuration Class | Pre-compile time  | X | All Variants |
|                                  | Link time   | - |              |
|                                  | Post-build time   | - |              |
| Value Configuration Class        | Pre-compile time  | X | All Variants |

▽

△

|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

]

**[ECUC\_Csm\_00033] Definition of EcucReferenceDef CsmChannelRef [**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmChannelRef                                      |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmQueue</a>                           |   |              |
| <b>Description</b>                      | Refers to the underlying Crypto Interface channel. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryIfChannel            |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                            | X | All Variants |
|   | <b>Link time</b>                                   | – |              |
|   | <b>Post-build time</b>                             | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                            | X | All Variants |
|   | <b>Link time</b>                                   | – |              |
|   | <b>Post-build time</b>                             | – |              |
| <b>Scope / Dependency</b>               | scope: local                                       |   |              |


]

**[ECUC\_Csm\_00281] Definition of EcucReferenceDef CsmQueueMainFunction Ref [**

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmQueueMainFunctionRef  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmQueue</a>   |   |              |
| <b>Description</b>               | Reference to CsmMainFunction, where the according CsmQueue is assigned to. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | Reference to <a href="#">CsmMainFunction</a>                               |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

**10.2.10 CsmInOutRedirections**

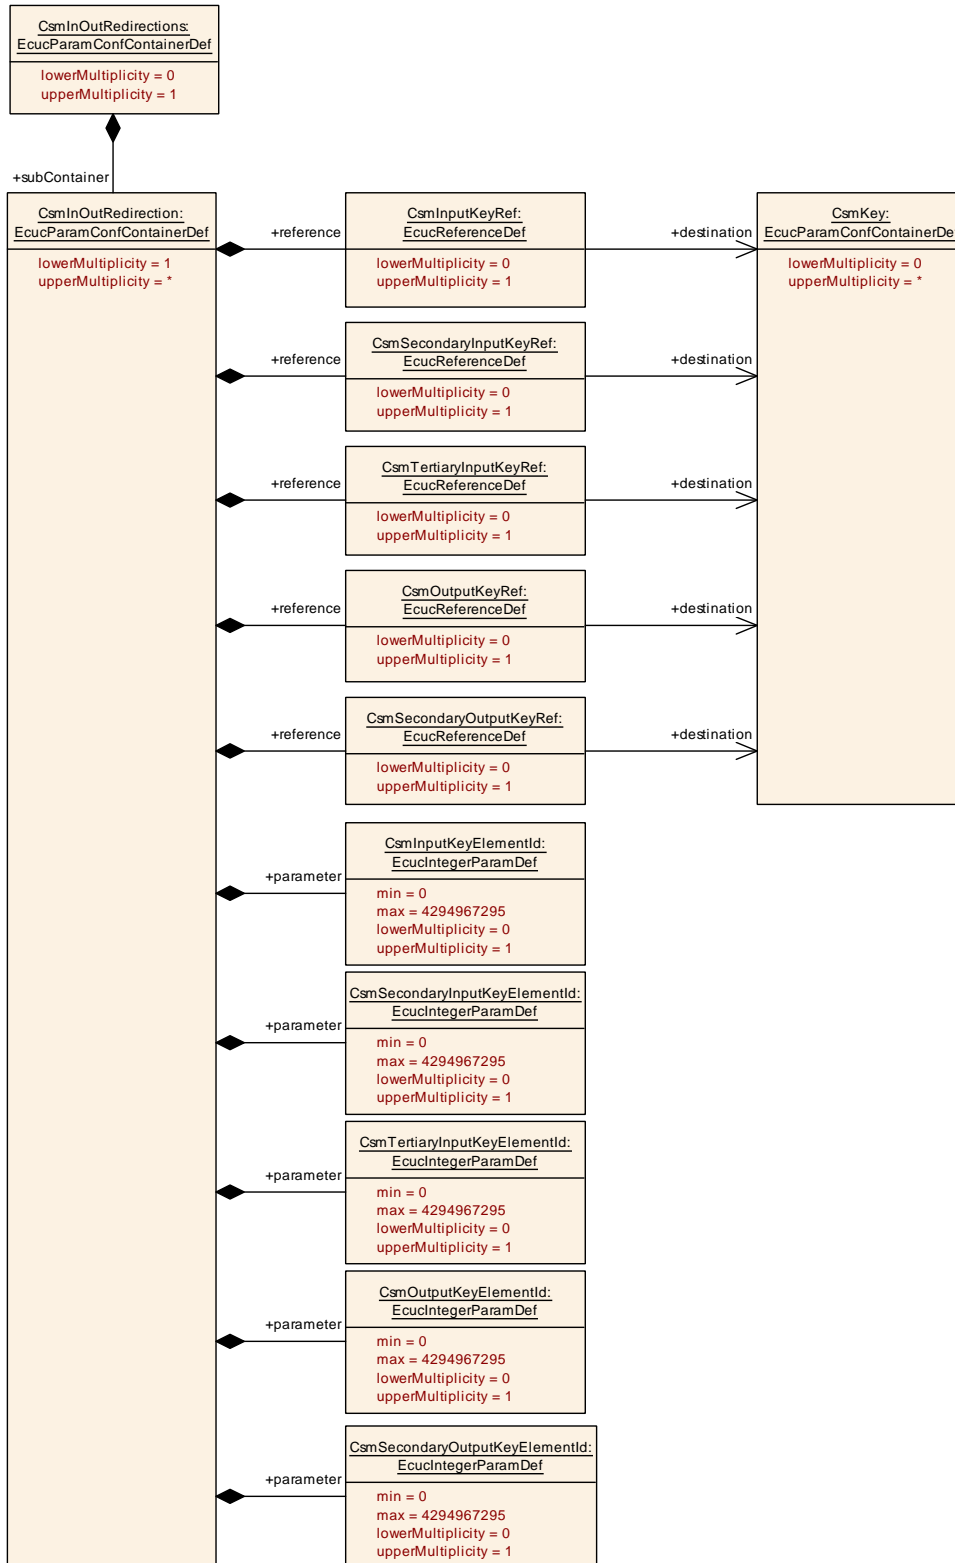

**Figure 10.7: Csm In/Out Redirections Layout**

**[ECUC\_Csm\_00262] Definition of EcucParamConfContainerDef CsmInOutRedirections** [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmInOutRedirections                             |
| <b>Parent Container</b>         | <a href="#">Csm</a>                              |
| <b>Description</b>              | Configuration for CSM redirection configurations |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                 |              |  |
|-------------------------------------|--------------|--|
| Container Name                      | Multiplicity | Scope / Dependency   |
| <a href="#">CsmInOutRedirection</a> | 1..*         | Container for configuration of a CSM redirection. A redirection let a CSM job use a specific key element as input or/and output. |

]

### 10.2.11 CsmInOutRedirection

**[ECUC\_Csm\_00264] Definition of EcucParamConfContainerDef CsmInOutRedirection** [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmInOutRedirection  |
| <b>Parent Container</b>         | <a href="#">CsmInOutRedirections</a>   |
| <b>Description</b>              | Container for configuration of a CSM redirection. A redirection let a CSM job use a specific key element as input or/and output. |
| <b>Configuration Parameters</b> |  |

| Included Parameters                            |              |                                  |
|--|--------------|----------------------------------|
| Parameter Name                                 | Multiplicity | ECUC ID                          |
| <a href="#">CsmInputKeyElementId</a>           | 0..1         | <a href="#">[ECUC_Csm_00266]</a> |
| <a href="#">CsmOutputKeyElementId</a>          | 0..1         | <a href="#">[ECUC_Csm_00272]</a> |
| <a href="#">CsmSecondaryInputKeyElementId</a>  | 0..1         | <a href="#">[ECUC_Csm_00269]</a> |
| <a href="#">CsmSecondaryOutputKeyElementId</a> | 0..1         | <a href="#">[ECUC_Csm_00274]</a> |
| <a href="#">CsmTertiaryInputKeyElementId</a>   | 0..1         | <a href="#">[ECUC_Csm_00270]</a> |
| <a href="#">CsmInputKeyRef</a>                 | 0..1         | <a href="#">[ECUC_Csm_00265]</a> |
| <a href="#">CsmOutputKeyRef</a>                | 0..1         | <a href="#">[ECUC_Csm_00271]</a> |
| <a href="#">CsmSecondaryInputKeyRef</a>        | 0..1         | <a href="#">[ECUC_Csm_00267]</a> |
| <a href="#">CsmSecondaryOutputKeyRef</a>       | 0..1         | <a href="#">[ECUC_Csm_00273]</a> |
| <a href="#">CsmTertiaryInputKeyRef</a>         | 0..1         | <a href="#">[ECUC_Csm_00268]</a> |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00266] Definition of EcucIntegerParamDef CsmInputKeyElementId**

[

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmInputKeyElementId                        |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>         |   |              |
| <b>Description</b>                      | Identifier of the key element used as input |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                         |   |              |
| <b>Range</b>                            | 0 .. 4294967295                             |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false                                       |   |              |
| <b>Post-Build Variant Value</b>         | false                                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | - |              |
|   | <b>Post-build time</b>                      | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | - |              |
|   | <b>Post-build time</b>                      | - |              |
| <b>Scope / Dependency</b>               | scope: local                                |   |              |

]

**[ECUC\_Csm\_00272] Definition of EcucIntegerParamDef CsmOutputKeyElementId**

[

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmOutputKeyElementId                         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>           |   |              |
| <b>Description</b>                      | Identifier of the key element used as output. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                           |   |              |
| <b>Range</b>                            | 0 .. 4294967295                               |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                       | X | All Variants |
|   | <b>Link time</b>                              | - |              |
|   | <b>Post-build time</b>                        | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                       | X | All Variants |
|   | <b>Link time</b>                              | - |              |
|   | <b>Post-build time</b>                        | - |              |
| <b>Scope / Dependency</b>               | scope: local                                  |   |              |

]



### [ECUC\_Csm\_00269] Definition of EcucIntegerParamDef CsmSecondaryInputKeyElementId [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSecondaryInputKeyElementId                          |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>                    |   |              |
| <b>Description</b>                      | Identifier of the key element used as secondary input. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                                    |   |              |
| <b>Range</b>                            | 0 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                | X | All Variants |
|   | <b>Link time</b>                                       | - |              |
|   | <b>Post-build time</b>                                 | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                | X | All Variants |
|   | <b>Link time</b>                                       | - |              |
|   | <b>Post-build time</b>                                 | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00274] Definition of EcucIntegerParamDef CsmSecondaryOutputKeyElementId [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSecondaryOutputKeyElementId                          |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>                     |   |              |
| <b>Description</b>                      | Identifier of the key element used as secondary output. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                                     |   |              |
| <b>Range</b>                            | 0 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                 | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>                                  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                 | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>                                  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00270] Definition of EcucIntegerParamDef CsmTertiaryInputKeyElementId**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmTertiaryInputKeyElementId                          |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>                   |   |              |
| <b>Description</b>                      | Identifier of the key element used as tertiary input. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                                   |   |              |
| <b>Range</b>                            | 0 .. 4294967295                                       |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                               | X | All Variants |
|   | <b>Link time</b>                                      | – |              |
|   | <b>Post-build time</b>                                | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                               | X | All Variants |
|   | <b>Link time</b>                                      | – |              |
|   | <b>Post-build time</b>                                | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00265] Definition of EcucReferenceDef CsmInputKeyRef**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmInputKeyRef                                  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>             |   |              |
| <b>Description</b>                      | This parameter refers to the key used as input. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmKey</a>             |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|   | <b>Link time</b>                                | – |              |
|   | <b>Post-build time</b>                          | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                         | X | All Variants |
|   | <b>Link time</b>                                | – |              |
|   | <b>Post-build time</b>                          | – |              |
| <b>Scope / Dependency</b>               | scope: local                                    |   |              |

]

**[ECUC\_Csm\_00271] Definition of EcucReferenceDef CsmOutputKeyRef**

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmOutputKeyRef                                  |  |  |
| <b>Parent Container</b> | <a href="#">CsmInOutRedirection</a>              |  |  |
| <b>Description</b>      | This parameter refers to the key used as output. |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |





|                                  |                                     |   |              |
|----------------------------------|-------------------------------------|---|--------------|
| Type                             | Reference to <a href="#">CsmKey</a> |   |              |
| Post-Build Variant Multiplicity  | false                               |   |              |
| Post-Build Variant Value         | false                               |   |              |
| Multiplicity Configuration Class | Pre-compile time                    | X | All Variants |
|                                  | Link time                           | – |              |
|                                  | Post-build time                     | – |              |
| Value Configuration Class        | Pre-compile time                    | X | All Variants |
|                                  | Link time                           | – |              |
|                                  | Post-build time                     | – |              |
| Scope / Dependency               | scope: local                        |   |              |

]

### [ECUC\_Csm\_00267] Definition of EcucReferenceDef CsmSecondaryInputKeyRef

[

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| Parameter Name                   | CsmSecondaryInputKeyRef                                   |   |              |
| Parent Container                 | <a href="#">CsmlnOutRedirection</a>                       |   |              |
| Description                      | This parameter refers to the key used as secondary input. |   |              |
| Multiplicity                     | 0..1  |   |              |
| Type                             | Reference to <a href="#">CsmKey</a>                       |   |              |
| Post-Build Variant Multiplicity  | false   |   |              |
| Post-Build Variant Value         | false   |   |              |
| Multiplicity Configuration Class | Pre-compile time  | X | All Variants |
|                                  | Link time   | – |              |
|                                  | Post-build time   | – |              |
| Value Configuration Class        | Pre-compile time  | X | All Variants |
|                                  | Link time   | – |              |
|                                  | Post-build time   | – |              |
| Scope / Dependency               | scope: local  |   |              |

]

### [ECUC\_Csm\_00273] Definition of EcucReferenceDef CsmSecondaryOutputKeyRef

[

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| Parameter Name                   | CsmSecondaryOutputKeyRef                                   |   |              |
| Parent Container                 | <a href="#">CsmlnOutRedirection</a>                        |   |              |
| Description                      | This parameter refers to the key used as secondary output. |   |              |
| Multiplicity                     | 0..1   |   |              |
| Type                             | Reference to <a href="#">CsmKey</a>                        |   |              |
| Post-Build Variant Multiplicity  | false  |   |              |
| Post-Build Variant Value         | false  |   |              |
| Multiplicity Configuration Class | Pre-compile time   | X | All Variants |
|                                  | Link time  | – |              |
|                                  | Post-build time  | – |              |



△

|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |


]

**[ECUC\_Csm\_00268] Definition of EcucReferenceDef CsmTertiaryInputKeyRef [**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmTertiaryInputKeyRef                                   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmInOutRedirection</a>                      |   |              |
| <b>Description</b>                      | This parameter refers to the key used as tertiary input. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmKey</a>                      |   |              |
| <b>Post-Build Variant Multiplicity</b>  | false  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

**10.2.12 CsmPrimitives**

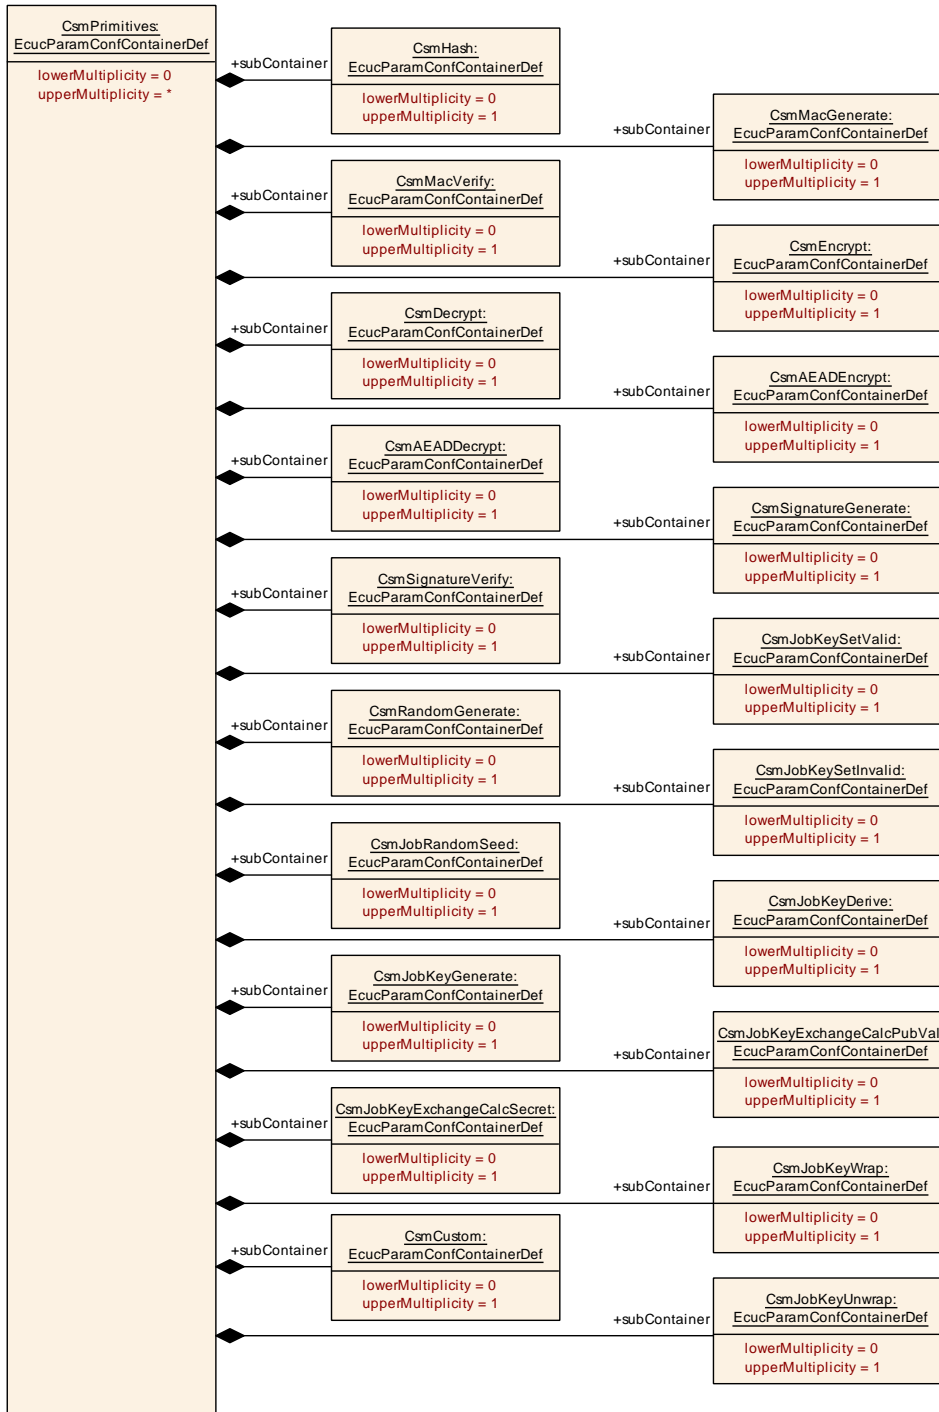

**Figure 10.8: CsmPrimitives Layout**

[ECUC\_Csm\_00006] Definition of EcucParamConfContainerDef CsmPrimitives [


|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmPrimitives                                |
| <b>Parent Container</b>         | <a href="#">Csm</a>                          |
| <b>Description</b>              | Container for configuration of CsmPrimitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| <b>Included Containers</b>                  |                     |   |
|---|---------------------|---|
| <b>Container Name</b>                       | <b>Multiplicity</b> | <b>Scope / Dependency</b>                                     |
| <a href="#">CsmAEADDecrypt</a>              | 0..1                | Configuration of AEAD decryption primitives                   |
| <a href="#">CsmAEADEncrypt</a>              | 0..1                | Configuration of AEAD encryption primitives                   |
| <a href="#">CsmCustom</a>                   | 0..1                | Container for configuration of a CSM custom crypto primitive. |
| <a href="#">CsmDecrypt</a>                  | 0..1                | Configurations of Decryption primitives                       |
| <a href="#">CsmEncrypt</a>                  | 0..1                | Configurations of Encryption primitives                       |
| <a href="#">CsmHash</a>                     | 0..1                | Container for Hash Configurations                             |
| <a href="#">CsmJobKeyDerive</a>             | 0..1                | Configurations of KeyDerive primitives                        |
| <a href="#">CsmJobKeyExchangeCalcPubVal</a> | 0..1                | Configurations of KeyExchangeCalcPubVal primitives            |
| <a href="#">CsmJobKeyExchangeCalcSecret</a> | 0..1                | Configurations of KeyExchangeCalcSecret primitives            |
| <a href="#">CsmJobKeyGenerate</a>           | 0..1                | Configurations of KeyGenerate primitives                      |
| <a href="#">CsmJobKeySetInvalid</a>         | 0..1                | Configurations of KeySetInvalid primitives                    |
| <a href="#">CsmJobKeySetValid</a>           | 0..1                | Configurations of KeySetValid primitives                      |
| <a href="#">CsmJobKeyUnwrap</a>             | 0..1                | Configurations of KeyUnWrap primitives                        |
| <a href="#">CsmJobKeyWrap</a>               | 0..1                | Configurations of KeyWrap primitives                          |
| <a href="#">CsmJobRandomSeed</a>            | 0..1                | Configurations of RandomSeed primitives                       |
| <a href="#">CsmMacGenerate</a>              | 0..1                | Configurations of MacGenerate primitives                      |
| <a href="#">CsmMacVerify</a>                | 0..1                | Configurations of MacVerify primitives                        |
| <a href="#">CsmRandomGenerate</a>           | 0..1                | Configurations of RandomGenerate primitives                   |
| <a href="#">CsmSignatureGenerate</a>        | 0..1                | Configurations of SignatureGenerate primitives                |
| <a href="#">CsmSignatureVerify</a>          | 0..1                | Configurations of SignatureVerify primitives                  |

]

**10.2.13 CsmHash**

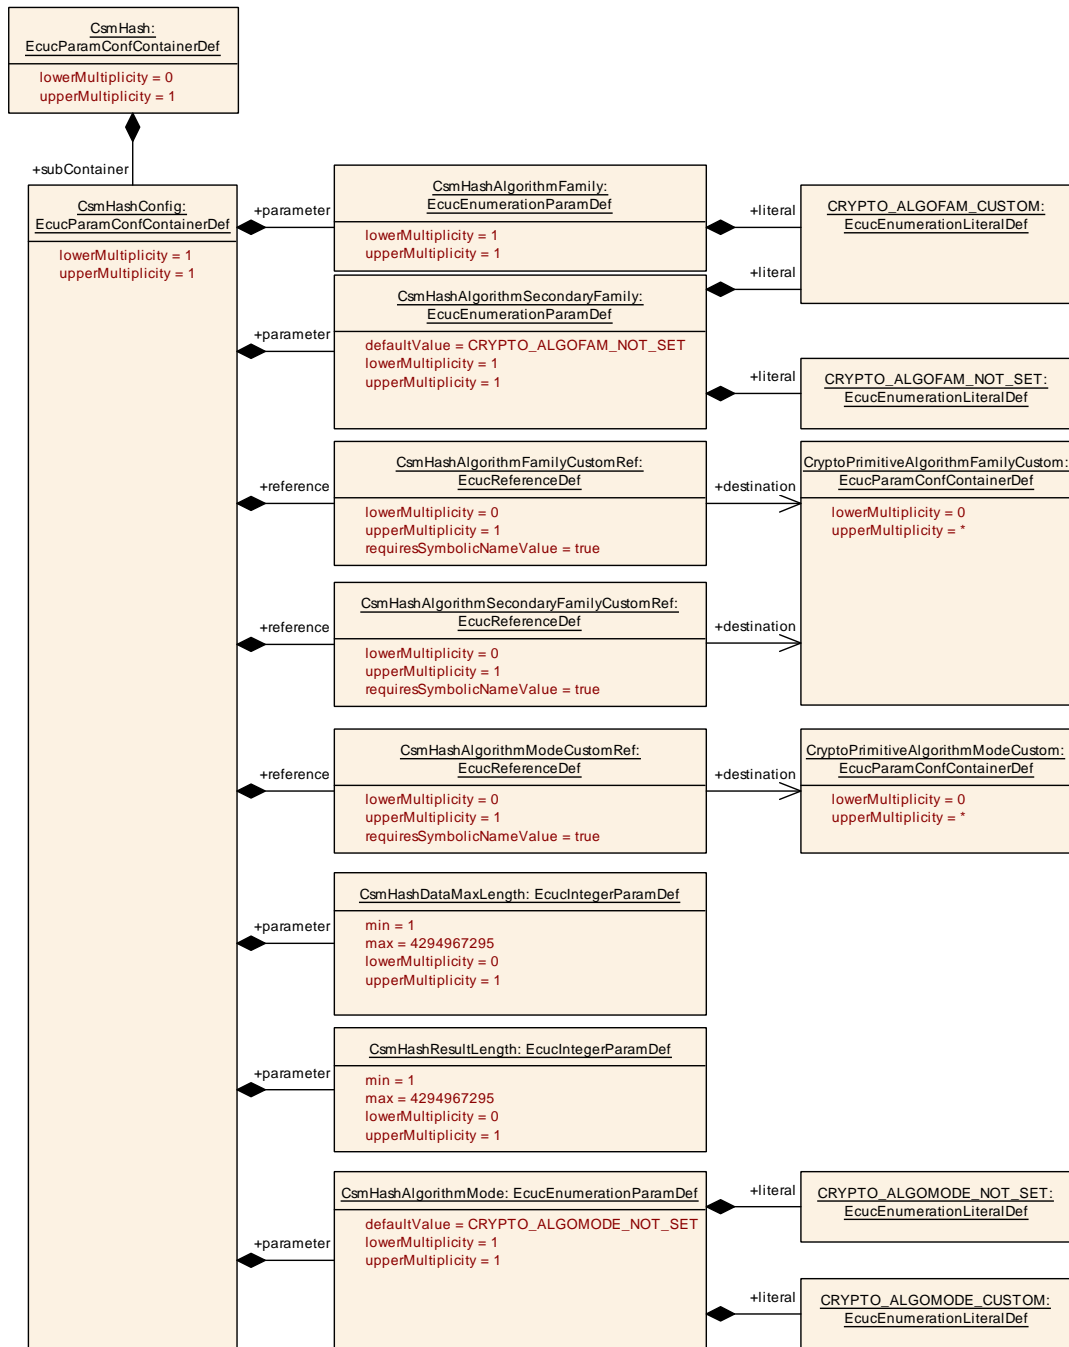

**Figure 10.9: CsmHash Layout**

**[ECUC\_Csm\_00021] Definition of EcucParamConfContainerDef CsmHash [**

|                                 |                                   |
|---------------------------------|-----------------------------------|
| <b>Container Name</b>           | CsmHash                           |
| <b>Parent Container</b>         | CsmPrimitives                     |
| <b>Description</b>              | Container for Hash Configurations |
| <b>Configuration Parameters</b> |                                   |

| No Included Parameters |              |  |
|------------------------|--------------|--|
| Included Containers    |              |  |
| Container Name         | Multiplicity | Scope / Dependency   |
| CsmHashConfig          | 1            | Container for configuration of a CSM hash. The container name serves as a symbolic name for the identifier of a key configuration. |

]

### 10.2.14 CsmHashConfig

#### [ECUC\_Csm\_00036] Definition of EcucParamConfContainerDef CsmHashConfig

[

| Container Name           | CsmHashConfig  |
|--------------------------|--|
| Parent Container         | CsmHash  |
| Description              | Container for configuration of a CSM hash. The container name serves as a symbolic name for the identifier of a key configuration. |
| Configuration Parameters |  |

| Included Parameters                      |              |                  |
|--|--------------|------------------|
| Parameter Name                           | Multiplicity | ECUC ID          |
| CsmHashAlgorithmFamily                   | 1            | [ECUC_Csm_00038] |
| CsmHashAlgorithmMode                     | 1            | [ECUC_Csm_00131] |
| CsmHashAlgorithmSecondaryFamily          | 1            | [ECUC_Csm_00181] |
| CsmHashDataMaxLength                     | 0..1         | [ECUC_Csm_00040] |
| CsmHashResultLength                      | 0..1         | [ECUC_Csm_00130] |
| CsmHashAlgorithmFamilyCustomRef          | 0..1         | [ECUC_Csm_00282] |
| CsmHashAlgorithmModeCustomRef            | 0..1         | [ECUC_Csm_00284] |
| CsmHashAlgorithmSecondaryFamilyCustomRef | 0..1         | [ECUC_Csm_00283] |

| No Included Containers |
|------------------------|
|------------------------|

]

#### [ECUC\_Csm\_00038] Definition of EcucEnumerationParamDef CsmHashAlgorithmFamily

[

|                  |   |
|------------------|---|
| Parameter Name   | CsmHashAlgorithmFamily  |
| Parent Container | CsmHashConfig   |
| Description      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |







|   |                             |   |              |
|---|-----------------------------|---|--------------|
| <b>Multiplicity</b>                     | 1                           |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef     |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_BLAKE_1_256  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_512  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256 | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512 | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM       | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160    | – |              |
|   | CRYPTO_ALGOFAM_SHA1         | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | – |              |
| CRYPTO_ALGOFAM_SHAKE256                 | –                           |   |              |
| CRYPTO_ALGOFAM_SM3                      | –                           |   |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00131] Definition of EcucEnumerationParamDef CsmHashAlgorithmMode [

|                         |   |
|-------------------------|---|
| <b>Parameter Name</b>   | CsmHashAlgorithmMode                                      |
| <b>Parent Container</b> | <a href="#">CsmHashConfig</a>                             |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |
| <b>Multiplicity</b>     | 1   |



△

|   |   |   |              |
|---|---|---|--------------|
| <b>Type</b>                             | EcucEnumerationParamDef                 |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                  | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                 | – |              |
| <b>Default value</b>                    | <a href="#">CRYPTO_ALGOMODE_NOT_SET</a> |   |              |
| <b>Post-Build Variant Value</b>         | false                                   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Scope / Dependency</b>               | scope: local                            |   |              |

]

### [ECUC\_Csm\_00181] Definition of EcucEnumerationParamDef CsmHashAlgorithmSecondaryFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmHashAlgorithmSecondaryFamily                             |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmHashConfig</a>                               |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                     |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM                                       | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET                                      | – |              |
| <b>Default value</b>                    | <a href="#">CRYPTO_ALGOFAM_NOT_SET</a>                      |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                     | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                     | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                      | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00040] Definition of EcucIntegerParamDef CsmHashDataMaxLength**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmHashDataMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmHashConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]

**[ECUC\_Csm\_00130] Definition of EcucIntegerParamDef CsmHashResultLength**

[

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmHashResultLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmHashConfig</a>   |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

### [ECUC\_Csm\_00282] Definition of EcucReferenceDef CsmHashAlgorithmFamilyCustomRef

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmHashAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmHashConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter shall only be present if CsmHashAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00284] Definition of EcucReferenceDef CsmHashAlgorithmModeCustomRef

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmHashAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmHashConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmHashAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00283] Definition of EcucReferenceDef CsmHashAlgorithmSecondaryFamilyCustomRef

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmHashAlgorithmSecondaryFamilyCustomRef   |  |  |
| <b>Parent Container</b> | <a href="#">CsmHashConfig</a>  |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family container in the Crypto Driver |  |  |


▽

△

|   |   |   |              |
|---|---|---|--------------|
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmHashSecondaryAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

└

**10.2.15 CsmMacGenerate**

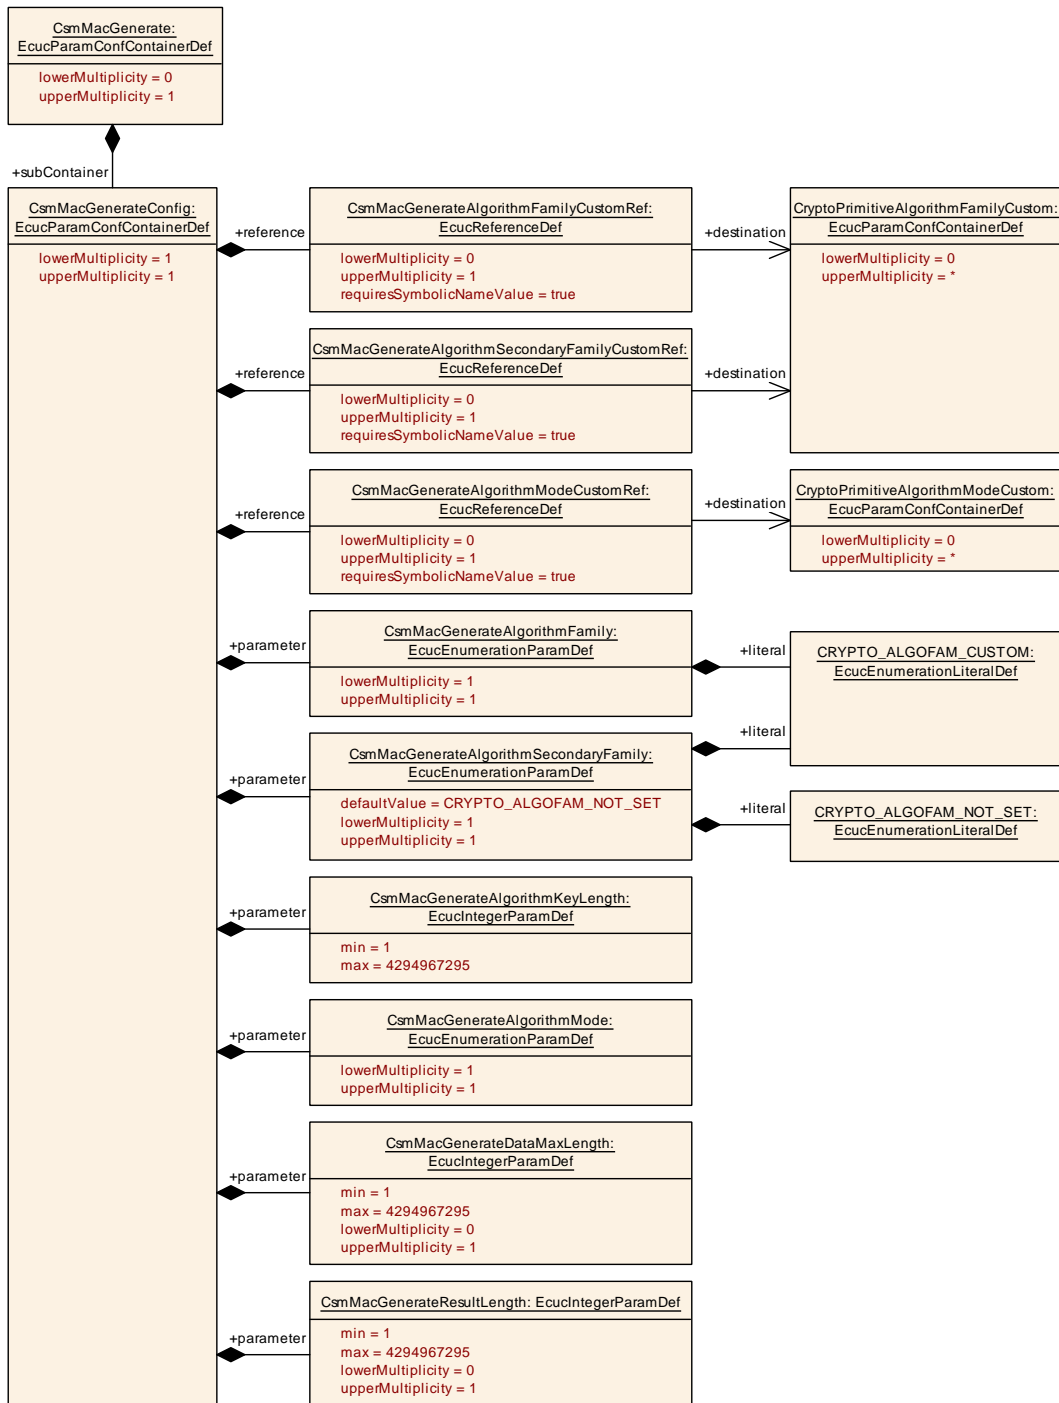

**Figure 10.10: CsmMacGenerate Layout**

**[ECUC\_Csm\_00022] Definition of EcucParamConfContainerDef CsmMacGenerate**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmMacGenerate                           |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>            |
| <b>Description</b>              | Configurations of MacGenerate primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                  |              |   |
|--------------------------------------|--------------|---|
| Container Name                       | Multiplicity | Scope / Dependency  |
| <a href="#">CsmMacGenerateConfig</a> | 1            | Container for configuration of a CSM mac generation interface. The container name serves as a symbolic name for the identifier of a MAC generation interface. |

]

## 10.2.16 CsmMacGenerateConfig

### [ECUC\_Csm\_00041] Definition of EcucParamConfContainerDef CsmMacGenerateConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmMacGenerateConfig  |
| <b>Parent Container</b>         | <a href="#">CsmMacGenerate</a>  |
| <b>Description</b>              | Container for configuration of a CSM mac generation interface. The container name serves as a symbolic name for the identifier of a MAC generation interface. |
| <b>Configuration Parameters</b> |   |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmMacGenerateAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00188] |
| <a href="#">CsmMacGenerateAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00044] |
| <a href="#">CsmMacGenerateAlgorithmMode</a>                     | 1            | [ECUC_Csm_00189] |
| <a href="#">CsmMacGenerateAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00134] |
| <a href="#">CsmMacGenerateDataMaxLength</a>                     | 0..1         | [ECUC_Csm_00137] |
| <a href="#">CsmMacGenerateResultLength</a>                      | 0..1         | [ECUC_Csm_00138] |
| <a href="#">CsmMacGenerateAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00285] |
| <a href="#">CsmMacGenerateAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00286] |
| <a href="#">CsmMacGenerateAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00287] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

## [ECUC\_Csm\_00188] Definition of EcucEnumerationParamDef CsmMacGenerateAlgorithmFamily

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES   | – |              |
|   | CRYPTO_ALGOFAM_AES  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_256  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_512  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256   | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512   | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_EEA3   | – |              |
|   | CRYPTO_ALGOFAM_EIA3   | – |              |
|   | CRYPTO_ALGOFAM_POLY1305   | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160  | – |              |
|   | CRYPTO_ALGOFAM_RNG  | – |              |
|   | CRYPTO_ALGOFAM_SHA1   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512   | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128   | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256   | – |              |
| CRYPTO_ALGOFAM_SIPHASH                  | –   |   |              |
| CRYPTO_ALGOFAM_SM3                      | –   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |







|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

]

### [ECUC\_Csm\_00044] Definition of EcucIntegerParamDef CsmMacGenerateAlgorithmKeyLength [

|   |                                      |   |              |
|---|--------------------------------------|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateAlgorithmKeyLength     |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a> |   |              |
| <b>Description</b>                      | Size of the MAC key in bytes         |   |              |
| <b>Multiplicity</b>                     | 1                                    |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                  |   |              |
| <b>Range</b>                            | 1 .. 4294967295                      |   |              |
| <b>Default value</b>                    | –                                    |   |              |
| <b>Post-Build Variant Value</b>         | false                                |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>              | X | All Variants |
|   | <b>Link time</b>                     | – |              |
|   | <b>Post-build time</b>               | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>              | X | All Variants |
|   | <b>Link time</b>                     | – |              |
|   | <b>Post-build time</b>               | – |              |
| <b>Scope / Dependency</b>               | scope: local                         |   |              |

]

### [ECUC\_Csm\_00189] Definition of EcucEnumerationParamDef CsmMacGenerateAlgorithmMode [

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmMacGenerateAlgorithmMode                               |   |  |
| <b>Parent Container</b> | <a href="#">CsmMacGenerateConfig</a>                      |   |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef                                   |   |  |
| <b>Range</b>            | CRYPTO_ALGOMODE_CMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_CTRDRBG                                   | – |  |
|                         | CRYPTO_ALGOMODE_CUSTOM                                    | – |  |
|                         | CRYPTO_ALGOMODE_GMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_HMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_NOT_SET                                   | – |  |
|                         | CRYPTO_ALGOMODE_SIPHASH_2_4                               | – |  |





|   |                                 |   |              |
|---|---------------------------------|---|--------------|
|   | CRYPTO_ALGOMODE_<br>SIPHASH_4_8 | – |              |
| <b>Post-Build Variant Value</b>         | false                           |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>         | X | All Variants |
|   | <b>Link time</b>                | – |              |
|   | <b>Post-build time</b>          | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>         | X | All Variants |
|   | <b>Link time</b>                | – |              |
|   | <b>Post-build time</b>          | – |              |
| <b>Scope / Dependency</b>               | scope: local                    |   |              |

]

### [ECUC\_Csm\_00134] Definition of EcucEnumerationParamDef CsmMacGenerateAlgorithmSecondaryFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateAlgorithmSecondaryFamily                                |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a>                                  |   |              |
| <b>Description</b>                      | Determines the secondary algorithm family used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET  | – |              |
| <b>Default value</b>                    | <a href="#">CRYPTO_ALGOFAM_NOT_SET</a>                                |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00137] Definition of EcucIntegerParamDef CsmMacGenerateDataMaxLength [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmMacGenerateDataMaxLength  |  |  |
| <b>Parent Container</b> | <a href="#">CsmMacGenerateConfig</a>   |  |  |
| <b>Description</b>      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |
| <b>Type</b>             | EcucIntegerParamDef  |  |  |
| <b>Range</b>            | 1 .. 4294967295  |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00138] Definition of EcucIntegerParamDef CsmMacGenerateResult Length

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateResultLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

### [ECUC\_Csm\_00285] Definition of EcucReferenceDef CsmMacGenerateAlgorithm FamilyCustomRef

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmMacGenerateAlgorithmFamilyCustomRef                             |  |  |
| <b>Parent Container</b> | <a href="#">CsmMacGenerateConfig</a>                               |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family custom container |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmMacGenerateAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00286] Definition of EcucReferenceDef CsmMacGenerateAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmMacGenerateAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00287] Definition of EcucReferenceDef CsmMacGenerateAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmMacGenerateAlgorithmSecondaryFamilyCustomRef                                  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacGenerateConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom                  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |




△

|                           |   |   |  |
|---------------------------|---|---|--|
|                           | <b>Post-build time</b>  | - |  |
| <b>Scope / Dependency</b> | scope: local<br>dependency: This parameter shall only be present if CsmMacGenerateSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |  |

└

**10.2.17 CsmMacVerify**

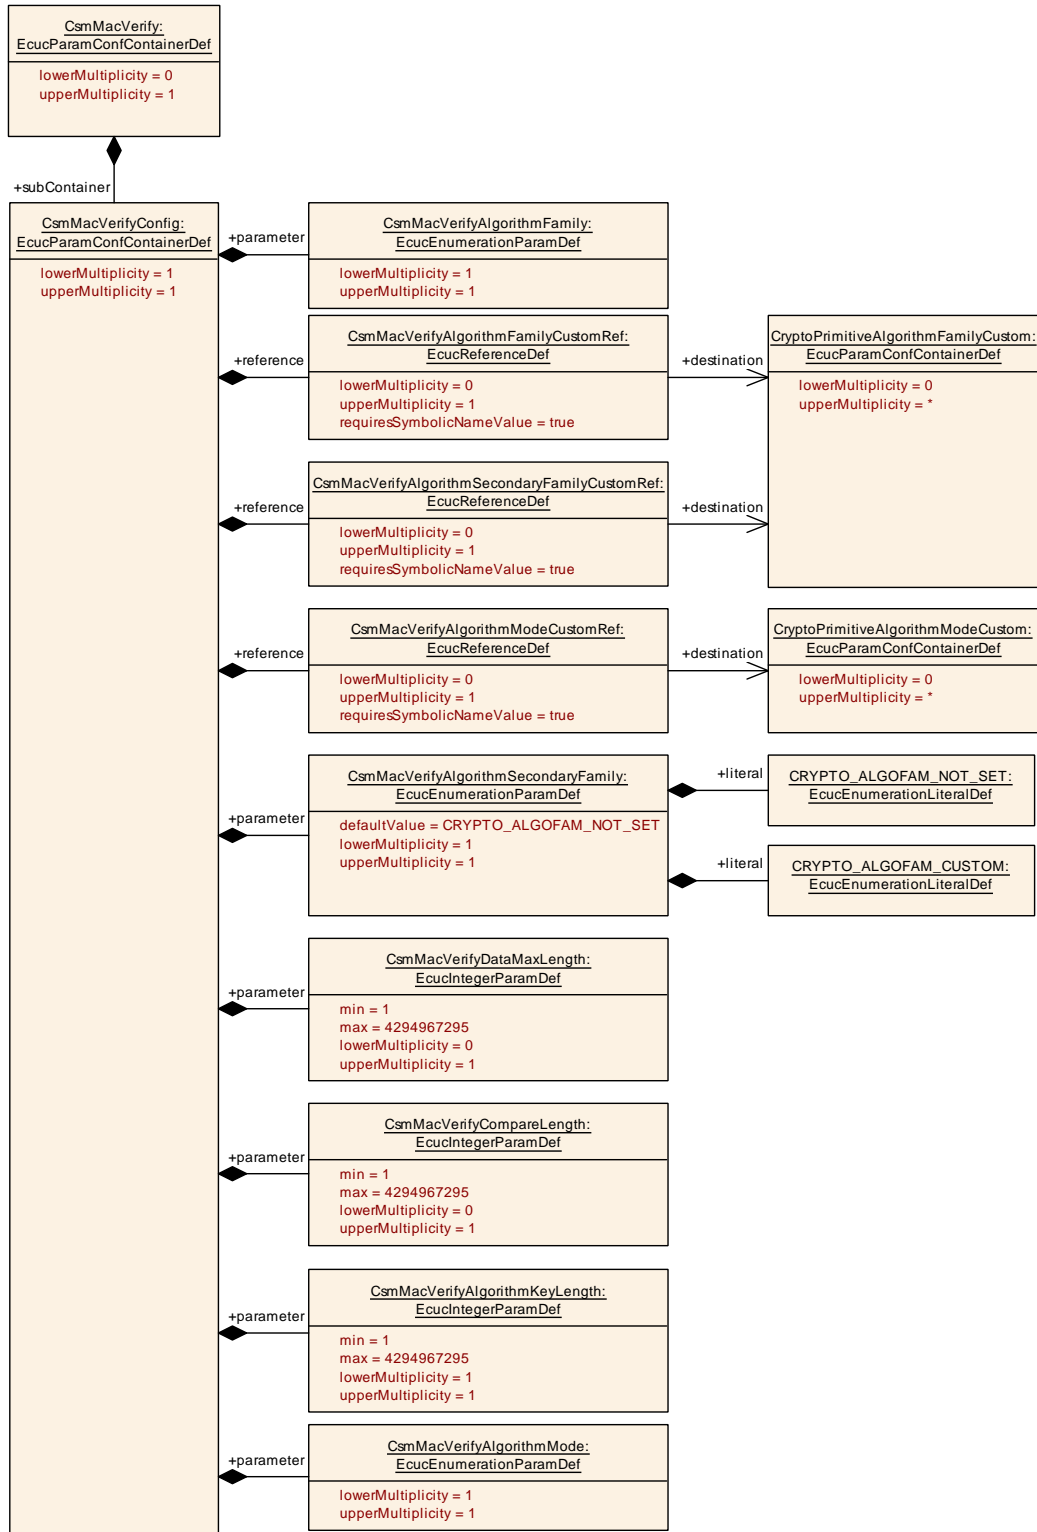

**Figure 10.11: CsmMacVerify Layout**

[ECUC\_Csm\_00023] Definition of EcucParamConfContainerDef CsmMacVerify [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmMacVerify                           |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>          |
| <b>Description</b>              | Configurations of MacVerify primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                |              |  |
|------------------------------------|--------------|--|
| Container Name                     | Multiplicity | Scope / Dependency   |
| <a href="#">CsmMacVerifyConfig</a> | 1            | Container for configuration of a CSM MAC verification interface. The container name serves as a symbolic name for the identifier of a MAC generation interface |

]

### 10.2.18 CsmMacVerifyConfig

#### [ECUC\_Csm\_00049] Definition of EcucParamConfContainerDef CsmMacVerify Config [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmMacVerifyConfig   |
| <b>Parent Container</b>         | <a href="#">CsmMacVerify</a>   |
| <b>Description</b>              | Container for configuration of a CSM MAC verification interface. The container name serves as a symbolic name for the identifier of a MAC generation interface |
| <b>Configuration Parameters</b> |  |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmMacVerifyAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00051] |
| <a href="#">CsmMacVerifyAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00193] |
| <a href="#">CsmMacVerifyAlgorithmMode</a>                     | 1            | [ECUC_Csm_00195] |
| <a href="#">CsmMacVerifyAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00140] |
| <a href="#">CsmMacVerifyCompareLength</a>                     | 0..1         | [ECUC_Csm_00142] |
| <a href="#">CsmMacVerifyDataMaxLength</a>                     | 0..1         | [ECUC_Csm_00056] |
| <a href="#">CsmMacVerifyAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00288] |
| <a href="#">CsmMacVerifyAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00289] |
| <a href="#">CsmMacVerifyAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00290] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00051] Definition of EcucEnumerationParamDef CsmMacVerifyAlgorithmFamily**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES   | – |              |
|   | CRYPTO_ALGOFAM_AES  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_256  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_512  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256   | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512   | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_EEA3   | – |              |
|   | CRYPTO_ALGOFAM_EIA3   | – |              |
|   | CRYPTO_ALGOFAM_POLY1305   | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160  | – |              |
|   | CRYPTO_ALGOFAM_RNG  | – |              |
|   | CRYPTO_ALGOFAM_SHA1   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384   | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512   | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128   | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256   | – |              |
|   | CRYPTO_ALGOFAM_SIPHASH  | – |              |
|   | CRYPTO_ALGOFAM_SM3  | – |              |
|   | CRYPTO_ALGOMODE_CUSTOM  | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |







|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

]

### [ECUC\_Csm\_00193] Definition of EcucIntegerParamDef CsmMacVerifyAlgorithmKeyLength

|   |                                    |   |              |
|---|------------------------------------|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyAlgorithmKeyLength     |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a> |   |              |
| <b>Description</b>                      | Size of the MAC key in bytes       |   |              |
| <b>Multiplicity</b>                     | 1                                  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                |   |              |
| <b>Range</b>                            | 1 .. 4294967295                    |   |              |
| <b>Default value</b>                    | –                                  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>            | X | All Variants |
|   | <b>Link time</b>                   | – |              |
|   | <b>Post-build time</b>             | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>            | X | All Variants |
|   | <b>Link time</b>                   | – |              |
|   | <b>Post-build time</b>             | – |              |
| <b>Scope / Dependency</b>               | scope: local                       |   |              |

]

### [ECUC\_Csm\_00195] Definition of EcucEnumerationParamDef CsmMacVerifyAlgorithmMode

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmMacVerifyAlgorithmMode                                 |   |  |
| <b>Parent Container</b> | <a href="#">CsmMacVerifyConfig</a>                        |   |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef                                   |   |  |
| <b>Range</b>            | CRYPTO_ALGOMODE_CMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_CTRDRBG                                   | – |  |
|                         | CRYPTO_ALGOMODE_CUSTOM                                    | – |  |
|                         | CRYPTO_ALGOMODE_GMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_HMAC                                      | – |  |
|                         | CRYPTO_ALGOMODE_NOT_SET                                   | – |  |
|                         | CRYPTO_ALGOMODE_SIPHASH_2_4                               | – |  |
|                         | CRYPTO_ALGOMODE_SIPHASH_4_8                               | – |  |





|                                  |                  |   |              |
|----------------------------------|------------------|---|--------------|
| Multiplicity Configuration Class | Pre-compile time | X | All Variants |
|                                  | Link time        | – |              |
|                                  | Post-build time  | – |              |
| Value Configuration Class        | Pre-compile time | X | All Variants |
|                                  | Link time        | – |              |
|                                  | Post-build time  | – |              |
| Scope / Dependency               | scope: local     |   |              |

]

### [ECUC\_Csm\_00140] Definition of EcucEnumerationParamDef CsmMacVerifyAlgorithmSecondaryFamily [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| Parameter Name                   | CsmMacVerifyAlgorithmSecondaryFamily                                  |   |              |
| Parent Container                 | <a href="#">CsmMacVerifyConfig</a>                                    |   |              |
| Description                      | Determines the secondary algorithm family used for the crypto service |   |              |
| Multiplicity                     | 1   |   |              |
| Type                             | EcucEnumerationParamDef   |   |              |
| Range                            | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET  | – |              |
| Default value                    | <a href="#">CRYPTO_ALGOFAM_NOT_SET</a>                                |   |              |
| Post-Build Variant Value         | false   |   |              |
| Multiplicity Configuration Class | Pre-compile time  | X | All Variants |
|                                  | Link time   | – |              |
|                                  | Post-build time   | – |              |
| Value Configuration Class        | Pre-compile time  | X | All Variants |
|                                  | Link time   | – |              |
|                                  | Post-build time   | – |              |
| Scope / Dependency               | scope: local  |   |              |

]

### [ECUC\_Csm\_00142] Definition of EcucIntegerParamDef CsmMacVerifyCompareLength [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| Parameter Name                   | CsmMacVerifyCompareLength   |   |              |
| Parent Container                 | <a href="#">CsmMacVerifyConfig</a>  |   |              |
| Description                      | Size of the input MAC buffer in BITS for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| Multiplicity                     | 0..1  |   |              |
| Type                             | EcucIntegerParamDef   |   |              |
| Range                            | 1 .. 4294967295   |   |              |
| Default value                    | –   |   |              |
| Post-Build Variant Value         | false   |   |              |
| Multiplicity Configuration Class | Pre-compile time  | X | All Variants |





|                                  |   |   |              |
|----------------------------------|---|---|--------------|
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00056] Definition of EcucIntegerParamDef CsmMacVerifyDataMaxLength

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyDataMaxLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a>   |   |              |
| <b>Description</b>                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]

### [ECUC\_Csm\_00288] Definition of EcucReferenceDef CsmMacVerifyAlgorithmFamilyCustomRef

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyAlgorithmFamilyCustomRef                               |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a>                                 |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |





|                                  |  |   |              |
|----------------------------------|--|---|--------------|
|                                  | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This reference shall only be present if CsmMacVerifyAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00289] Definition of EcucReferenceDef CsmMacVerifyAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmMacVerifyAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00290] Definition of EcucReferenceDef CsmMacVerifyAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmMacVerifyAlgorithmSecondaryFamilyCustomRef                                    |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmMacVerifyConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom                  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |







|                           |  |
|---------------------------|--|
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmMacVerifySecondaryAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |
|---------------------------|--|

」

**10.2.19 CsmEncrypt**

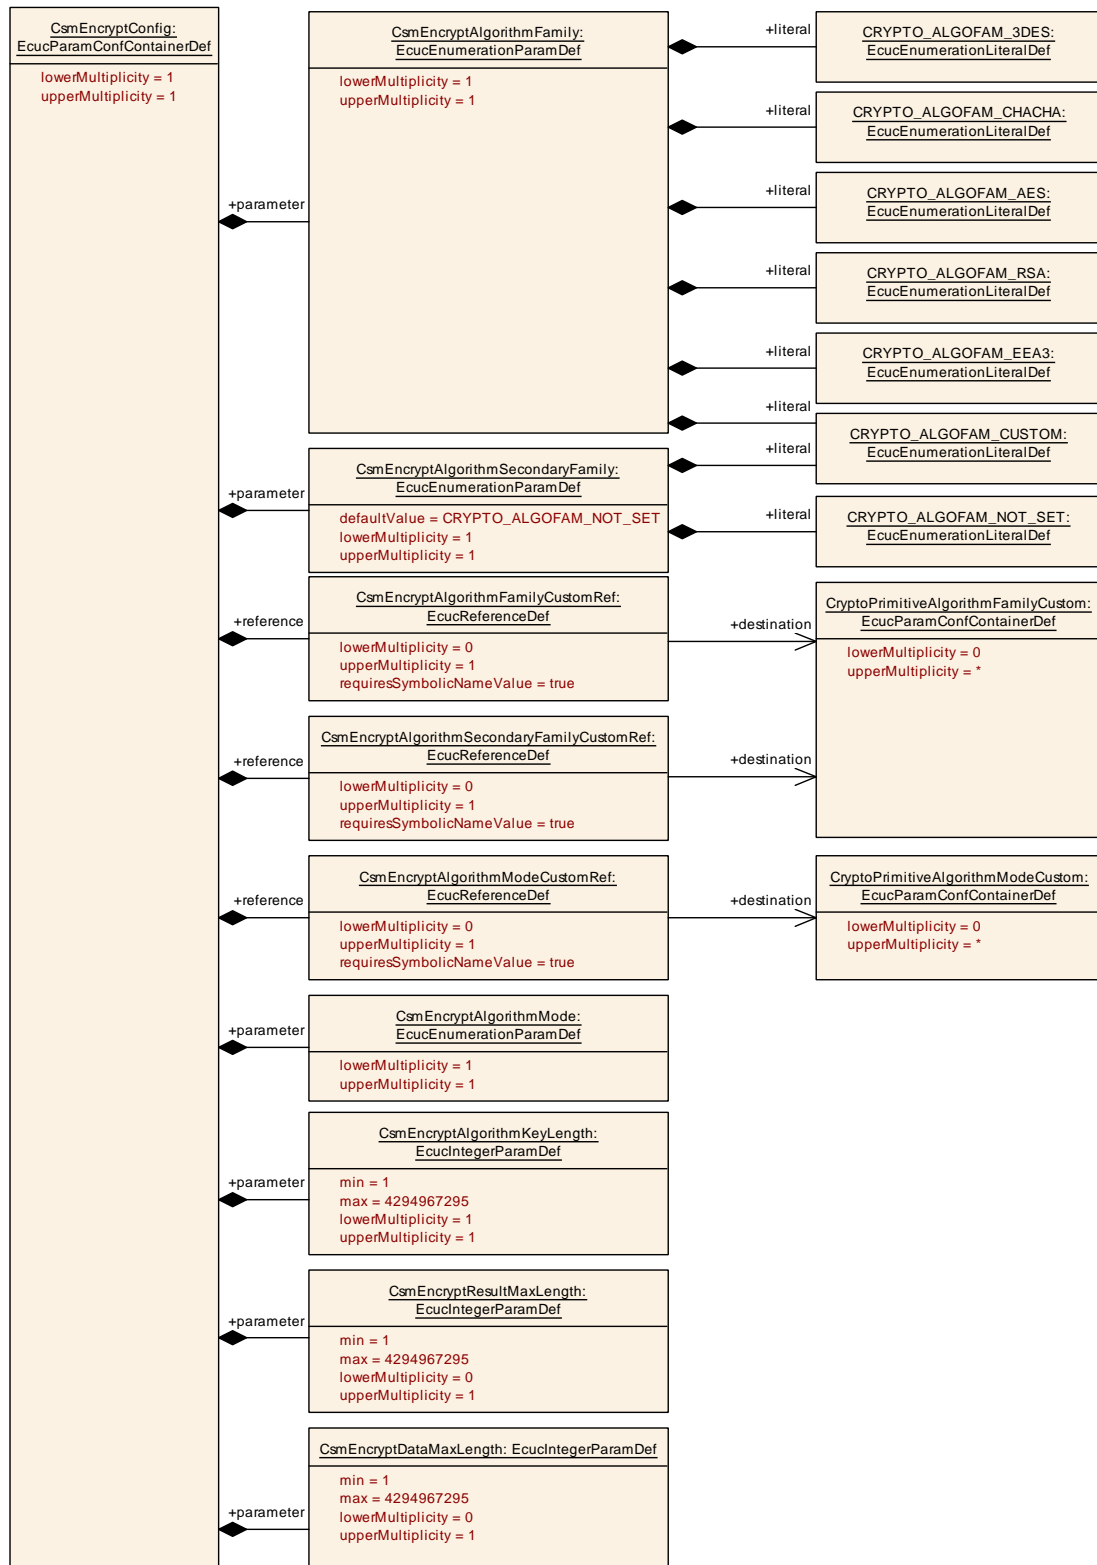

**Figure 10.12: CsmEncrypt Layout**

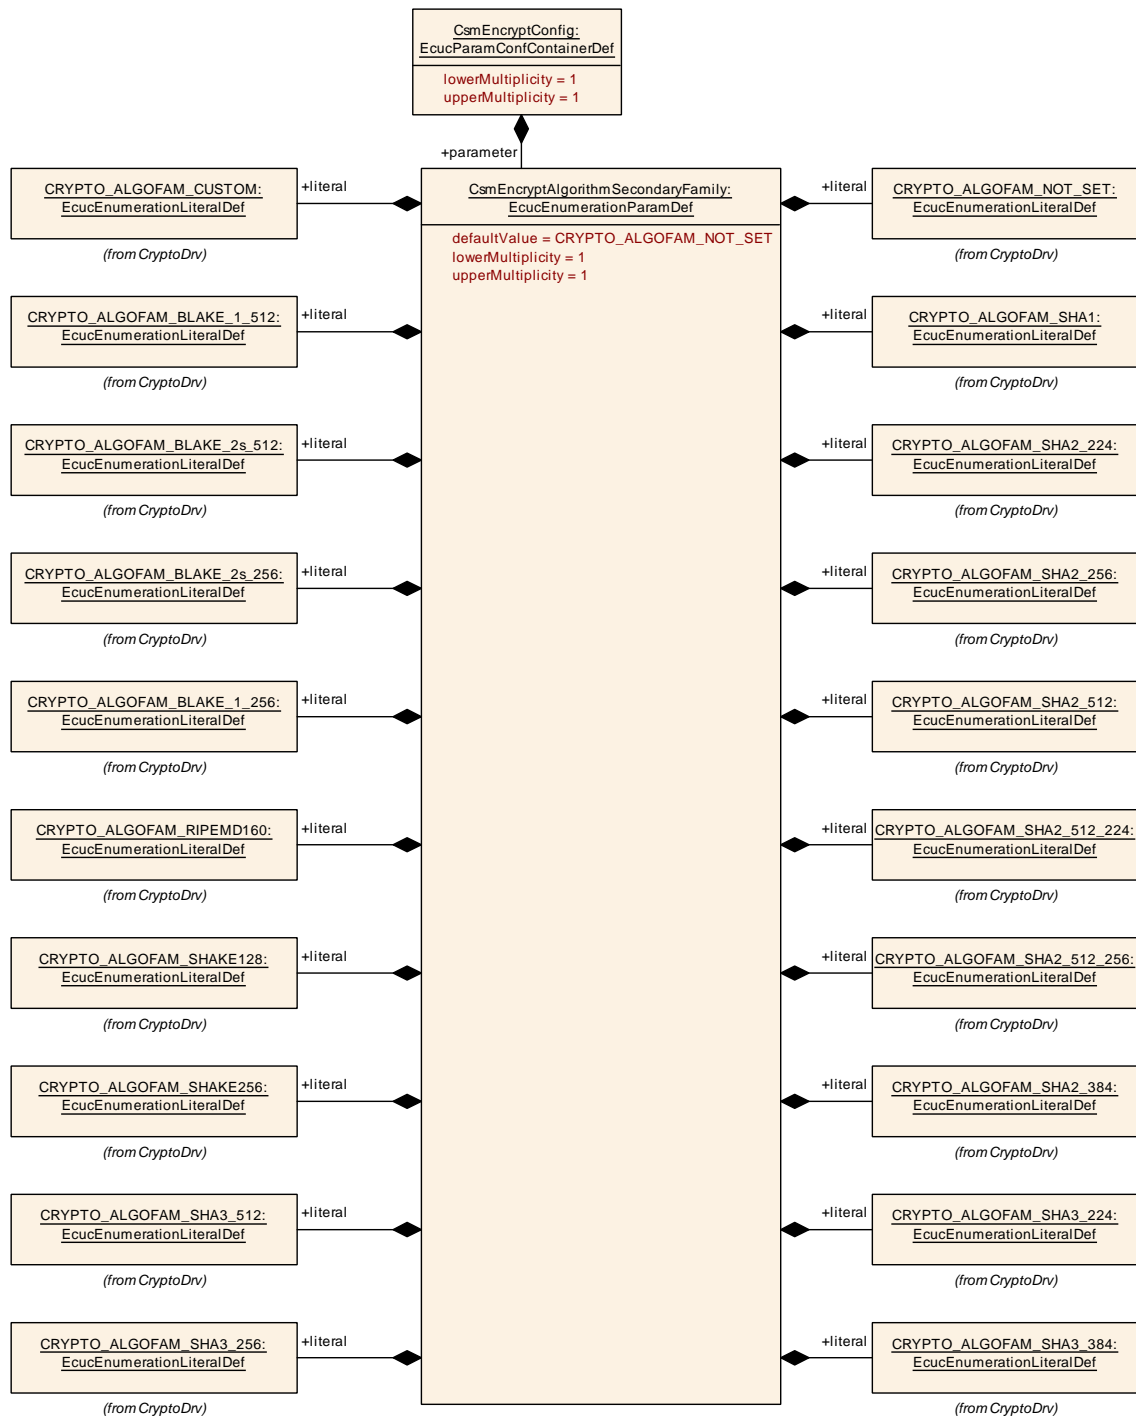

**Figure 10.13: CsmEncryptAlgorithmSecondaryFamily Layout**

**[ECUC\_Csm\_00024] Definition of EcucParamConfContainerDef CsmEncrypt**

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmEncrypt                              |
| <b>Parent Container</b>         | CsmPrimitives                           |
| <b>Description</b>              | Configurations of Encryption primitives |
| <b>Configuration Parameters</b> |   |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| <b>Included Containers</b>       |                     |  |
|----------------------------------|---------------------|--|
| <b>Container Name</b>            | <b>Multiplicity</b> | <b>Scope / Dependency</b>  |
| <a href="#">CsmEncryptConfig</a> | 1                   | Container for configuration of a CSM encryption interface. The container name serves as a symbolic name for the identifier of an encryption interface. |

]

### 10.2.20 CsmEncryptConfig

#### [ECUC\_Csm\_00057] Definition of EcucParamConfContainerDef CsmEncryptConfig [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmEncryptConfig   |
| <b>Parent Container</b>         | <a href="#">CsmEncrypt</a>   |
| <b>Description</b>              | Container for configuration of a CSM encryption interface. The container name serves as a symbolic name for the identifier of an encryption interface. |
| <b>Configuration Parameters</b> |  |

| <b>Included Parameters</b>                                  |                     |                  |
|---|---------------------|------------------|
| <b>Parameter Name</b>                                       | <b>Multiplicity</b> | <b>ECUC ID</b>   |
| <a href="#">CsmEncryptAlgorithmFamily</a>                   | 1                   | [ECUC_Csm_00182] |
| <a href="#">CsmEncryptAlgorithmKeyLength</a>                | 1                   | [ECUC_Csm_00191] |
| <a href="#">CsmEncryptAlgorithmMode</a>                     | 1                   | [ECUC_Csm_00060] |
| <a href="#">CsmEncryptAlgorithmSecondaryFamily</a>          | 1                   | [ECUC_Csm_00144] |
| <a href="#">CsmEncryptDataMaxLength</a>                     | 0..1                | [ECUC_Csm_00146] |
| <a href="#">CsmEncryptResultMaxLength</a>                   | 0..1                | [ECUC_Csm_00147] |
| <a href="#">CsmEncryptAlgorithmFamilyCustomRef</a>          | 0..1                | [ECUC_Csm_00291] |
| <a href="#">CsmEncryptAlgorithmModeCustomRef</a>            | 0..1                | [ECUC_Csm_00292] |
| <a href="#">CsmEncryptAlgorithmSecondaryFamilyCustomRef</a> | 0..1                | [ECUC_Csm_00293] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]



### [ECUC\_Csm\_00182] Definition of EcucEnumerationParamDef CsmEncryptAlgorithmFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES   | – |              |
|   | CRYPTO_ALGOFAM_AES  | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_EEA3   | – |              |
|   | CRYPTO_ALGOFAM_RSA  | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00191] Definition of EcucIntegerParamDef CsmEncryptAlgorithmKeyLength [

|   |                                     |   |              |
|---|-------------------------------------|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptAlgorithmKeyLength        |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>    |   |              |
| <b>Description</b>                      | Size of the encryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1                                   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                 |   |              |
| <b>Range</b>                            | 1 .. 4294967295                     |   |              |
| <b>Default value</b>                    | –                                   |   |              |
| <b>Post-Build Variant Value</b>         | false                               |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>             | X | All Variants |
|   | <b>Link time</b>                    | – |              |
|   | <b>Post-build time</b>              | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>             | X | All Variants |
|   | <b>Link time</b>                    | – |              |
|   | <b>Post-build time</b>              | – |              |
| <b>Scope / Dependency</b>               | scope: local                        |   |              |

]

**[ECUC\_Csm\_00060] Definition of EcucEnumerationParamDef CsmEncryptAlgorithmMode**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptAlgorithmMode                                   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>                          |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_12ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_20ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_8ROUNDS                                   | – |              |
|   | CRYPTO_ALGOMODE_CBC                                       | – |              |
|   | CRYPTO_ALGOMODE_CFB                                       | – |              |
|   | CRYPTO_ALGOMODE_CTR                                       | – |              |
|   | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_ECB                                       | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
|   | CRYPTO_ALGOMODE_OFB                                       | – |              |
|   | CRYPTO_ALGOMODE_RSAES_OAEP                                | – |              |
|   | CRYPTO_ALGOMODE_RSAES_PKCS1_v1_5                          | – |              |
|   | CRYPTO_ALGOMODE_XTS                                       | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00144] Definition of EcucEnumerationParamDef CsmEncryptAlgorithmSecondaryFamily**

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmEncryptAlgorithmSecondaryFamily                          |   |  |
| <b>Parent Container</b> | <a href="#">CsmEncryptConfig</a>                            |   |  |
| <b>Description</b>      | Determines the algorithm family used for the crypto service |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef                                     |   |  |
| <b>Range</b>            | CRYPTO_ALGOFAM_BLAKE_1_256                                  | – |  |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOFAM_BLAKE_1_512  | - |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256 | - |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512 | - |              |
|   | CRYPTO_ALGOFAM_CUSTOM       | - |              |
|   | CRYPTO_ALGOFAM_NOT_SET      | - |              |
|   | CRYPTO_ALGOFAM_RIPEMD160    | - |              |
|   | CRYPTO_ALGOFAM_SHA1         | - |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | - |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | - |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | - |              |
|   | CRYPTO_ALGOFAM_SHAKE256     | - |              |
| <b>Default value</b>                    | CRYPTO_ALGOFAM_NOT_SET      |   |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | - |              |
|   | <b>Post-build time</b>      | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | - |              |
|   | <b>Post-build time</b>      | - |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00146] Definition of EcucIntegerParamDef CsmEncryptDataMaxLength

|                         |   |  |
|-------------------------|---|--|
| <b>Parameter Name</b>   | CsmEncryptDataMaxLength   |  |
| <b>Parent Container</b> | CsmEncryptConfig  |  |
| <b>Description</b>      | Size of the input plaintext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |  |
| <b>Multiplicity</b>     | 0..1  |  |
| <b>Type</b>             | EcucIntegerParamDef   |  |
| <b>Range</b>            | 1 .. 4294967295   |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT." |   |              |

]

### [ECUC\_Csm\_00147] Definition of EcucIntegerParamDef CsmEncryptResultMaxLength

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptResultMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

### [ECUC\_Csm\_00291] Definition of EcucReferenceDef CsmEncryptAlgorithmFamilyCustomRef

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmEncryptAlgorithmFamilyCustomRef                                 |  |  |
| <b>Parent Container</b> | <a href="#">CsmEncryptConfig</a>                                   |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family custom container |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |





|   |  |   |              |
|---|--|---|--------------|
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter shall only be present if CsmEncryptAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00292] Definition of EcucReferenceDef CsmEncryptAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmEncryptAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00293] Definition of EcucReferenceDef CsmEncryptAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmEncryptAlgorithmSecondaryFamilyCustomRef                                      |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmEncryptConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom                  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |



△

|                           |  |   |  |
|---------------------------|--|---|--|
|                           | <b>Post-build time</b>   | - |  |
| <b>Scope / Dependency</b> | scope: local<br>dependency: This parameter shall only be present if CsmEncryptSecondaryAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |   |  |

└

10.2.21 CsmDecrypt



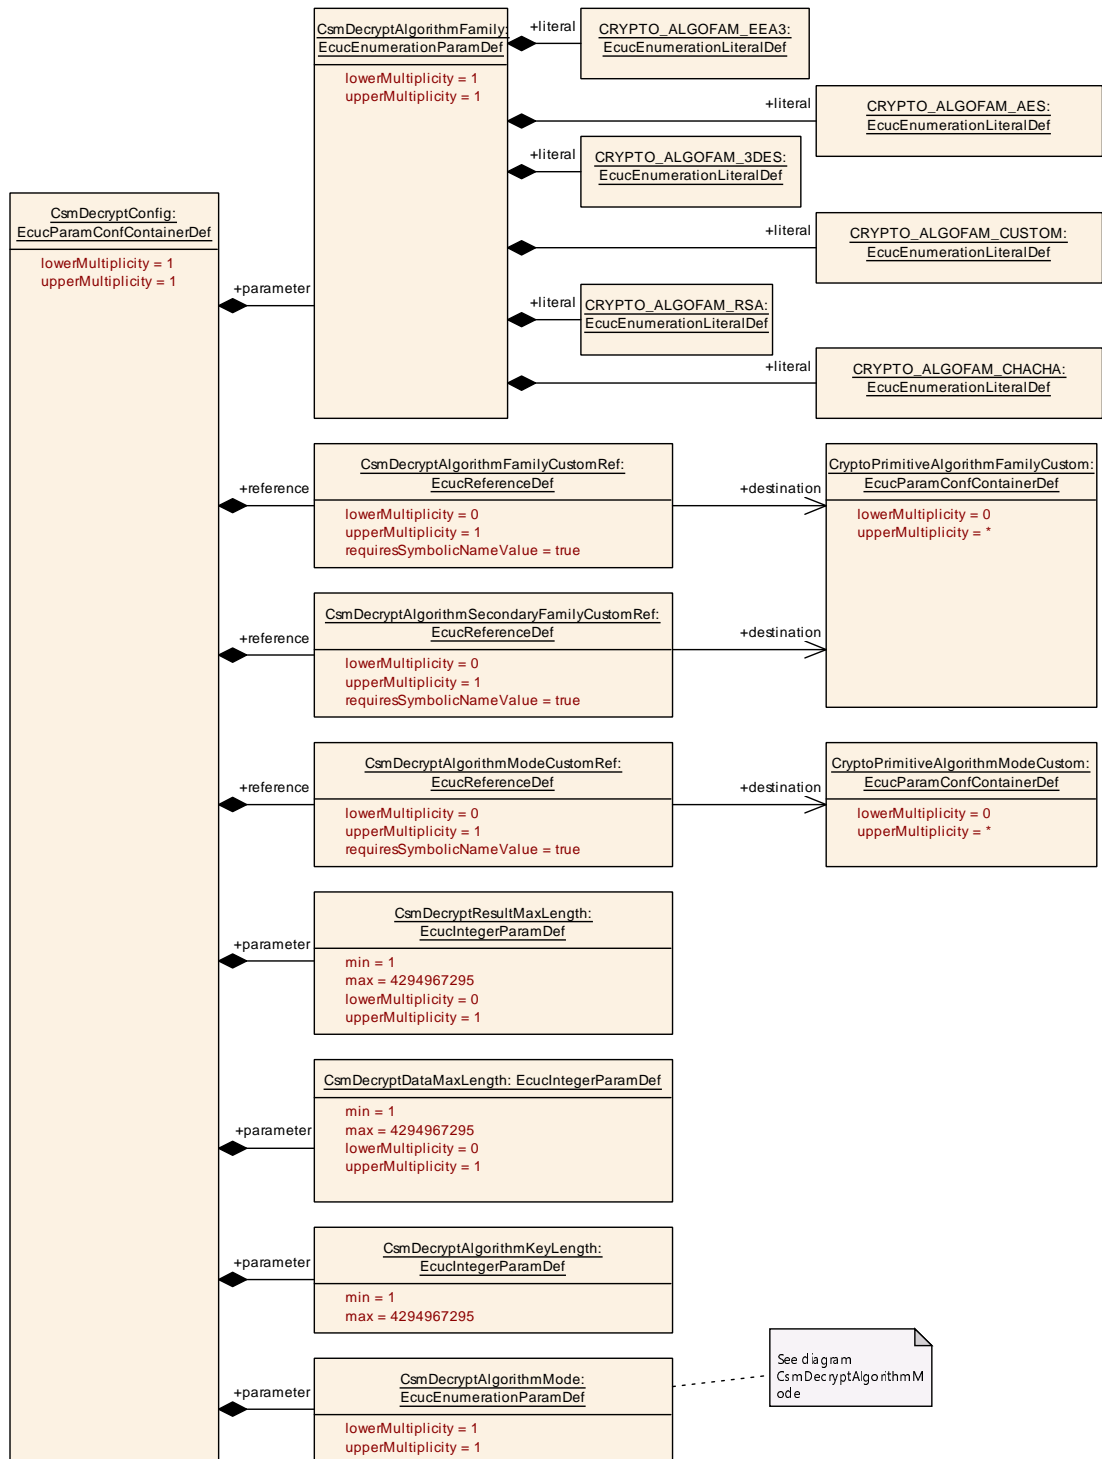


Figure 10.14: CsmDecrypt Layout



**Figure 10.15: CsmDecryptAlgorithmSecondaryFamily Layout**

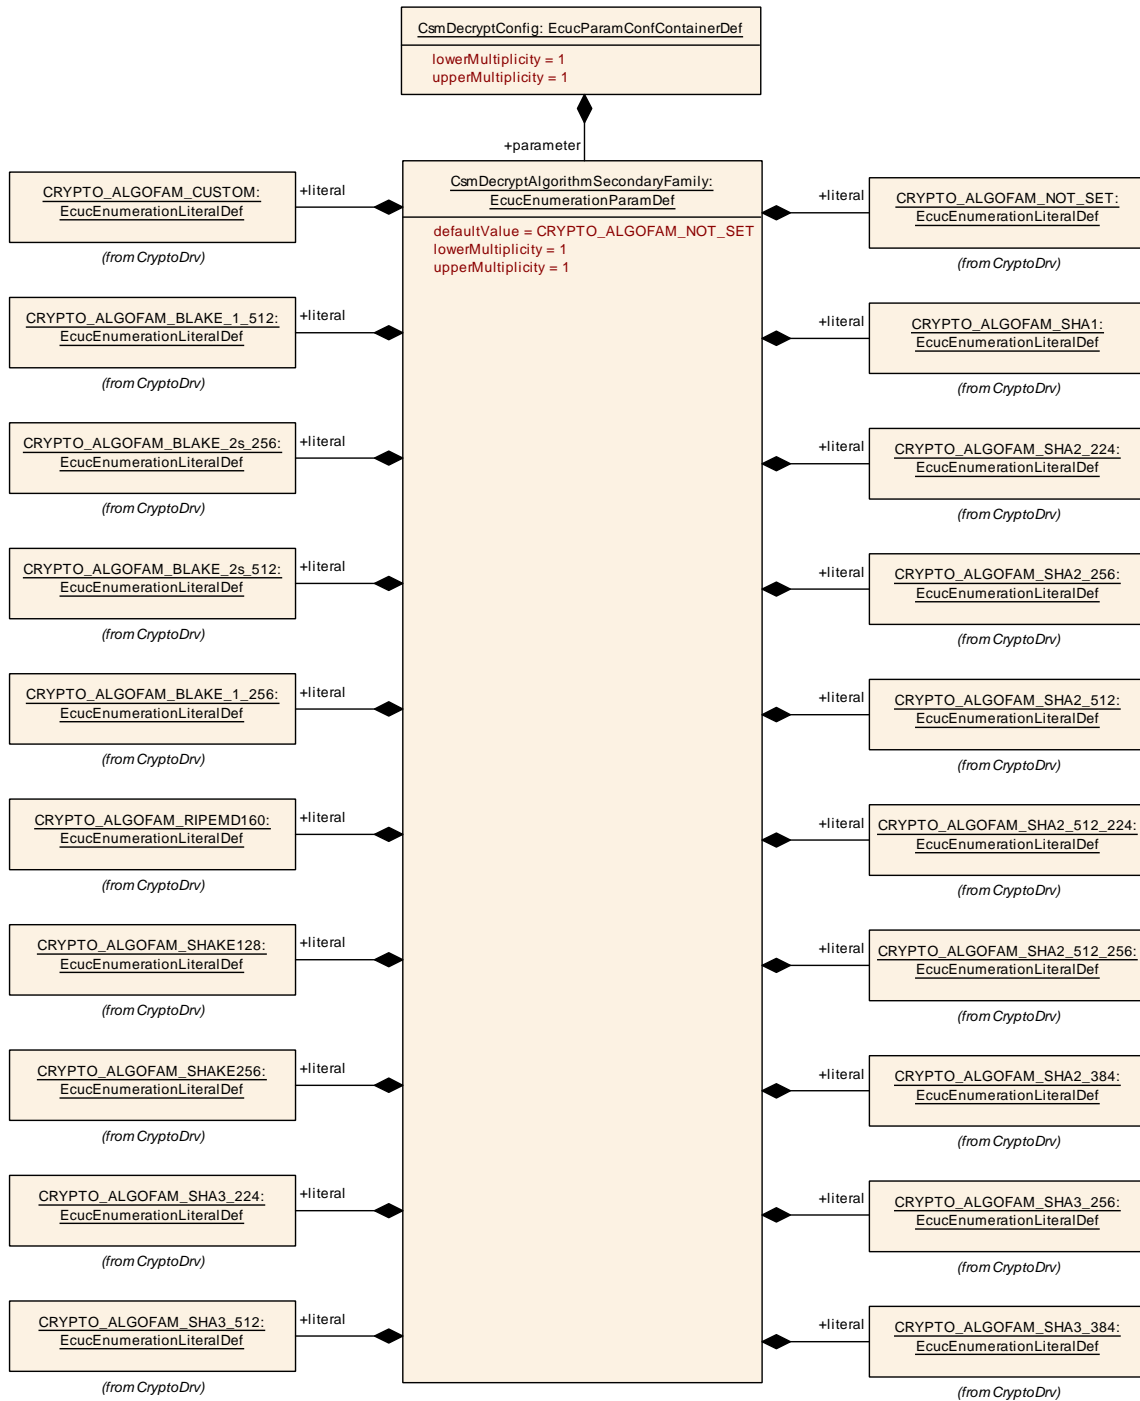

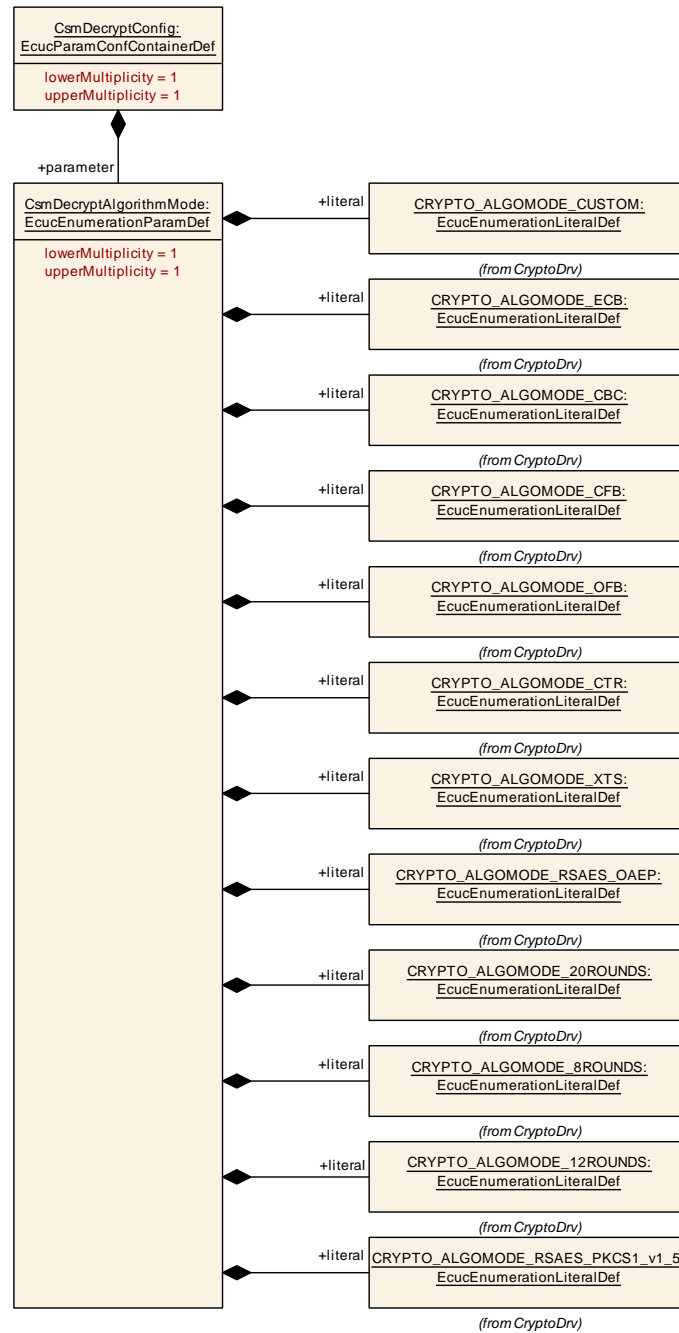

**Figure 10.16: CsmDecryptAlgorithmMode Layout**

**[ECUC\_Csm\_00025] Definition of EcucParamConfContainerDef CsmDecrypt**

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmDecrypt                              |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>           |
| <b>Description</b>              | Configurations of Decryption primitives |
| <b>Configuration Parameters</b> |   |

**No Included Parameters**

| Included Containers |              |  |
|---------------------|--------------|--|
| Container Name      | Multiplicity | Scope / Dependency   |
| CsmDecryptConfig    | 1            | Container for configuration of a CSM decryption interface. The container name serves as a symbolic name for the identifier of an decryption interface. |

]

## 10.2.22 CsmDecryptConfig

### [ECUC\_Csm\_00064] Definition of EcucParamConfContainerDef CsmDecryptConfig [

|                          |  |
|--------------------------|--|
| Container Name           | CsmDecryptConfig   |
| Parent Container         | CsmDecrypt   |
| Description              | Container for configuration of a CSM decryption interface. The container name serves as a symbolic name for the identifier of an decryption interface. |
| Configuration Parameters |  |

| Included Parameters                         |              |                  |
|---|--------------|------------------|
| Parameter Name                              | Multiplicity | ECUC ID          |
| CsmDecryptAlgorithmFamily                   | 1            | [ECUC_Csm_00066] |
| CsmDecryptAlgorithmKeyLength                | 1            | [ECUC_Csm_00067] |
| CsmDecryptAlgorithmMode                     | 1            | [ECUC_Csm_00068] |
| CsmDecryptAlgorithmSecondaryFamily          | 1            | [ECUC_Csm_00149] |
| CsmDecryptDataMaxLength                     | 0..1         | [ECUC_Csm_00154] |
| CsmDecryptResultMaxLength                   | 0..1         | [ECUC_Csm_00155] |
| CsmDecryptAlgorithmFamilyCustomRef          | 0..1         | [ECUC_Csm_00294] |
| CsmDecryptAlgorithmModeCustomRef            | 0..1         | [ECUC_Csm_00295] |
| CsmDecryptAlgorithmSecondaryFamilyCustomRef | 0..1         | [ECUC_Csm_00296] |

|                        |
|------------------------|
| No Included Containers |
|------------------------|

]

### [ECUC\_Csm\_00066] Definition of EcucEnumerationParamDef CsmDecryptAlgorithmFamily [

|                  |   |
|------------------|---|
| Parameter Name   | CsmDecryptAlgorithmFamily   |
| Parent Container | CsmDecryptConfig  |
| Description      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |
| Multiplicity     | 1   |
| Type             | EcucEnumerationParamDef   |





|   |                         |   |              |
|---|-------------------------|---|--------------|
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES     | – |              |
|   | CRYPTO_ALGOFAM_AES      | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_EEA3     | – |              |
|   | CRYPTO_ALGOFAM_RSA      | – |              |
| <b>Post-Build Variant Value</b>         | false                   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local            |   |              |

]

### [ECUC\_Csm\_00067] Definition of EcucIntegerParamDef CsmDecryptAlgorithmKeyLength

|   |                                     |   |              |
|---|-------------------------------------|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptAlgorithmKeyLength        |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmDecryptConfig</a>    |   |              |
| <b>Description</b>                      | Size of the encryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1                                   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                 |   |              |
| <b>Range</b>                            | 1 .. 4294967295                     |   |              |
| <b>Default value</b>                    | –                                   |   |              |
| <b>Post-Build Variant Value</b>         | false                               |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>             | X | All Variants |
|   | <b>Link time</b>                    | – |              |
|   | <b>Post-build time</b>              | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>             | X | All Variants |
|   | <b>Link time</b>                    | – |              |
|   | <b>Post-build time</b>              | – |              |
| <b>Scope / Dependency</b>               | scope: local                        |   |              |

]

### [ECUC\_Csm\_00068] Definition of EcucEnumerationParamDef CsmDecryptAlgorithmMode

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>Parameter Name</b>   | CsmDecryptAlgorithmMode                                   |  |  |
| <b>Parent Container</b> | <a href="#">CsmDecryptConfig</a>                          |  |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |  |  |
| <b>Multiplicity</b>     | 1   |  |  |





|   |                                  |   |              |
|---|----------------------------------|---|--------------|
| <b>Type</b>                             | EcucEnumerationParamDef          |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_12ROUNDS         | – |              |
|   | CRYPTO_ALGOMODE_20ROUNDS         | – |              |
|   | CRYPTO_ALGOMODE_8ROUNDS          | – |              |
|   | CRYPTO_ALGOMODE_CBC              | – |              |
|   | CRYPTO_ALGOMODE_CFB              | – |              |
|   | CRYPTO_ALGOMODE_CTR              | – |              |
|   | CRYPTO_ALGOMODE_CUSTOM           | – |              |
|   | CRYPTO_ALGOMODE_ECB              | – |              |
|   | CRYPTO_ALGOMODE_OFB              | – |              |
|   | CRYPTO_ALGOMODE_RSAES_OAEP       | – |              |
|   | CRYPTO_ALGOMODE_RSAES_PKCS1_v1_5 | – |              |
|   | CRYPTO_ALGOMODE_XTS              | – |              |
| <b>Post-Build Variant Value</b>         | false                            |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>          | X | All Variants |
|   | <b>Link time</b>                 | – |              |
|   | <b>Post-build time</b>           | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>          | X | All Variants |
|   | <b>Link time</b>                 | – |              |
|   | <b>Post-build time</b>           | – |              |
| <b>Scope / Dependency</b>               | scope: local                     |   |              |

]

### [ECUC\_Csm\_00149] Definition of EcucEnumerationParamDef CsmDecryptAlgorithmSecondaryFamily [

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmDecryptAlgorithmSecondaryFamily                                    |   |  |
| <b>Parent Container</b> | <a href="#">CsmDecryptConfig</a>                                      |   |  |
| <b>Description</b>      | Determines the secondary algorithm family used for the crypto service |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef   |   |  |
| <b>Range</b>            | CRYPTO_ALGOFAM_BLAKE_1_256  | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_1_512  | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_2s_256   | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_2s_512   | – |  |
|                         | CRYPTO_ALGOFAM_CUSTOM   | – |  |
|                         | CRYPTO_ALGOFAM_NOT_SET  | – |  |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOFAM_RIPEMD160    | – |              |
|   | CRYPTO_ALGOFAM_SHA1         | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256     | – |              |
| <b>Default value</b>                    | CRYPTO_ALGOFAM_NOT_SET      |   |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00154] Definition of EcucIntegerParamDef CsmDecryptDataMax Length

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptDataMaxLength  |   |              |
| <b>Parent Container</b>                 | CsmDecryptConfig   |   |              |
| <b>Description</b>                      | Size of the input ciphertext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |





|                           |   |   |  |
|---------------------------|---|---|--|
|                           | <b>Post-build time</b>  | – |  |
| <b>Scope / Dependency</b> | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |  |

]

### [ECUC\_Csm\_00155] Definition of EcucIntegerParamDef CsmDecryptResultMaxLength

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptResultMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

### [ECUC\_Csm\_00294] Definition of EcucReferenceDef CsmDecryptAlgorithmFamilyCustomRef

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptAlgorithmFamilyCustomRef                                 |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmDecryptConfig</a>                                   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |





|                           |  |
|---------------------------|--|
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmDecryptAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |
|---------------------------|--|

]

### [ECUC\_Csm\_00295] Definition of EcucReferenceDef CsmDecryptAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmDecryptAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

### [ECUC\_Csm\_00296] Definition of EcucReferenceDef CsmDecryptAlgorithmSecondaryFamilyCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmDecryptAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmDecryptSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |


]

**10.2.23 CsmAEADEncrypt**

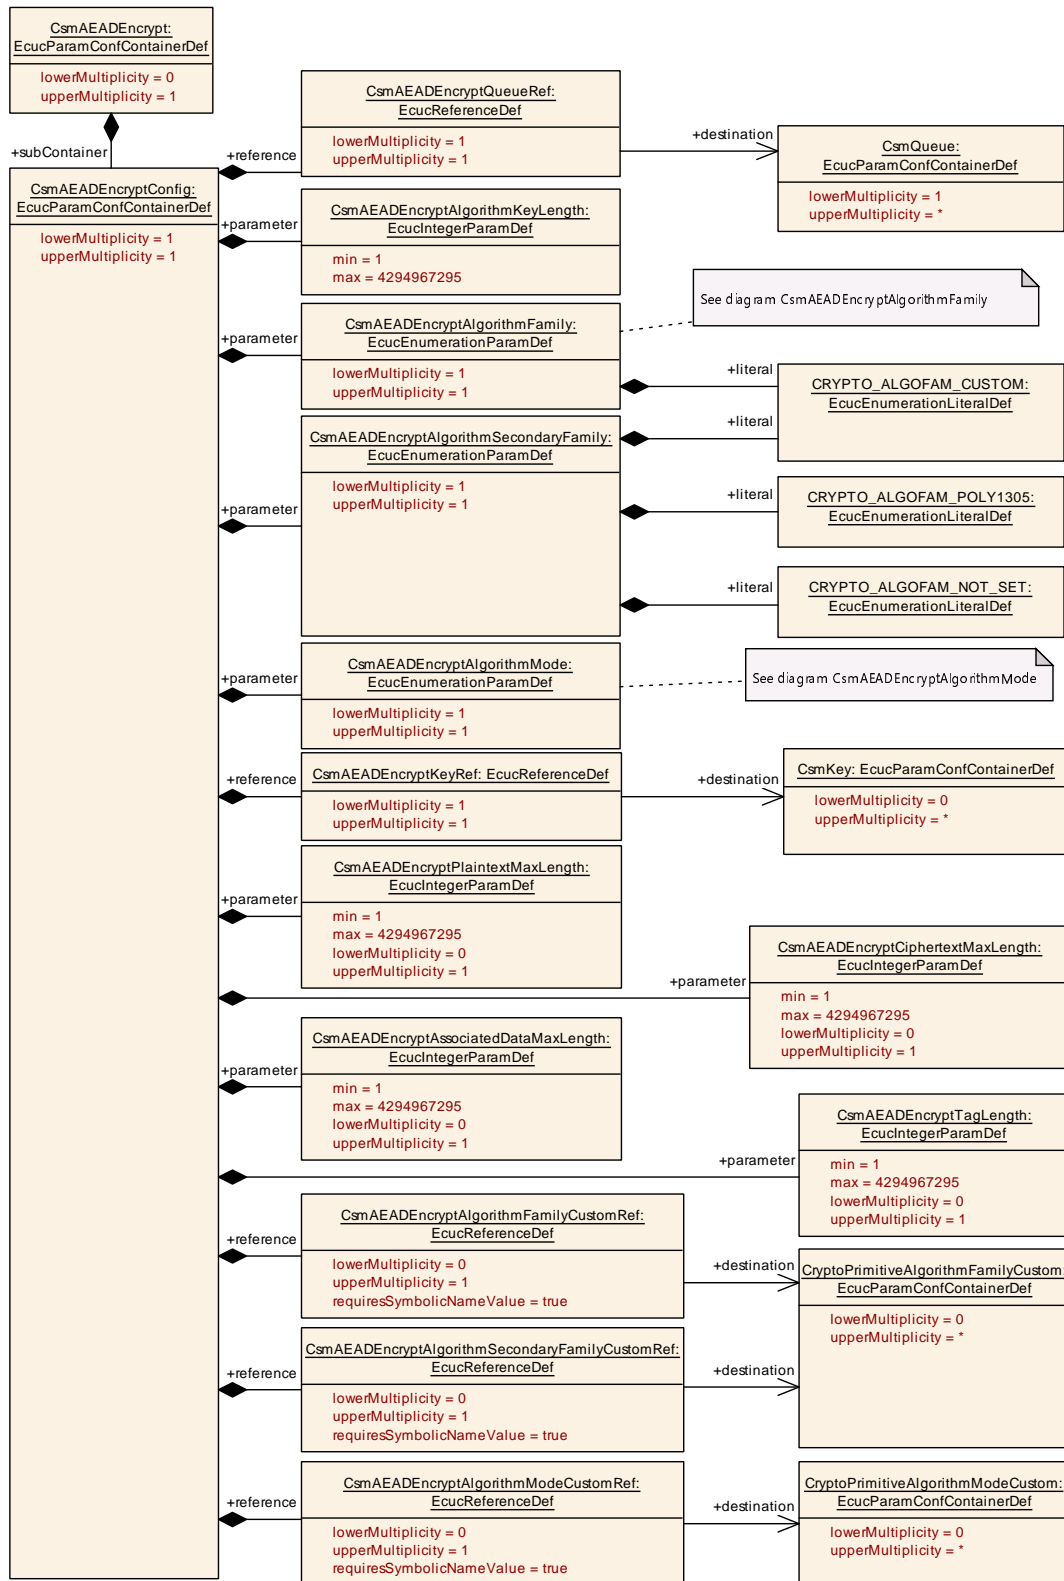


**Figure 10.17: CsmAEADEncrypt Layout**



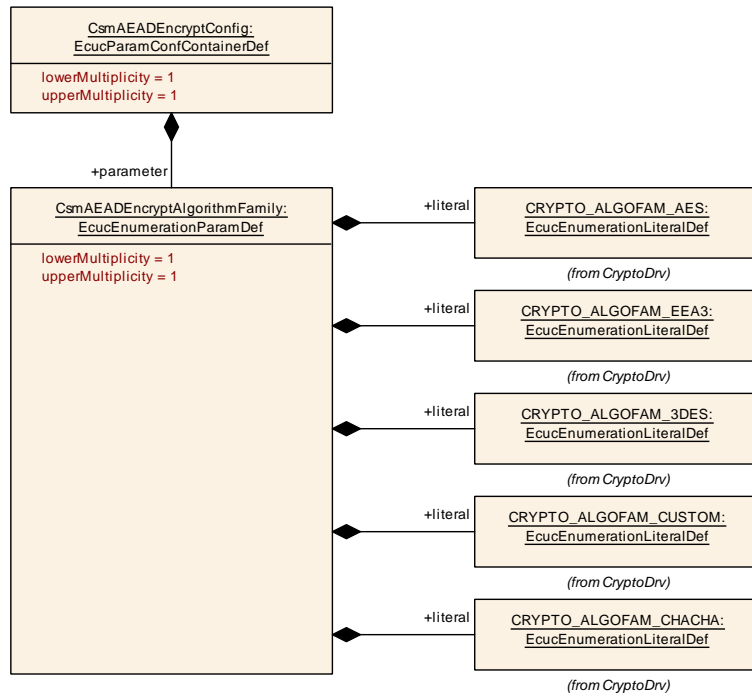

**Figure 10.18: CsmAEADEncryptAlgorithmFamily Layout**

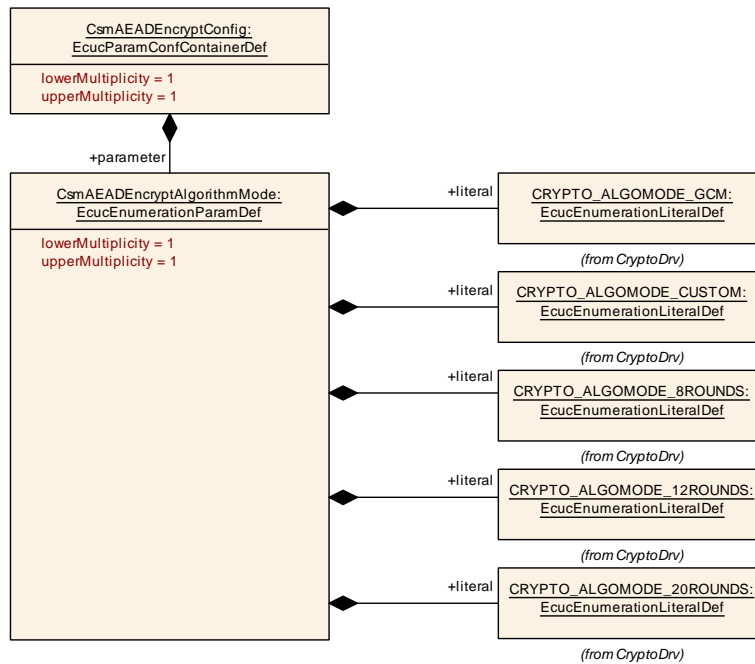

**Figure 10.19: CsmAEADEncryptAlgorithmMode Layout**

**[ECUC\_Csm\_00026] Definition of EcucParamConfContainerDef CsmAEADEn-**  
**crypt** |

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmAEADEncrypt                              |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>               |
| <b>Description</b>              | Configuration of AEAD encryption primitives |
| <b>Configuration Parameters</b> |   |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                  |              |  |
|--------------------------------------|--------------|--|
| Container Name                       | Multiplicity | Scope / Dependency   |
| <a href="#">CsmAEADEncryptConfig</a> | 1            | Container for configuration of a CSM encryption interface. The container name serves as a symbolic name for the identifier of an encryption interface. |

]

## 10.2.24 CsmAEADEncryptConfig

### [ECUC\_Csm\_00072] Definition of EcucParamConfContainerDef CsmAEADEncryptConfig [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmAEADEncryptConfig   |
| <b>Parent Container</b>         | <a href="#">CsmAEADEncrypt</a>   |
| <b>Description</b>              | Container for configuration of a CSM encryption interface. The container name serves as a symbolic name for the identifier of an encryption interface. |
| <b>Configuration Parameters</b> |  |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmAEADEncryptAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00074] |
| <a href="#">CsmAEADEncryptAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00075] |
| <a href="#">CsmAEADEncryptAlgorithmMode</a>                     | 1            | [ECUC_Csm_00076] |
| <a href="#">CsmAEADEncryptAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00278] |
| <a href="#">CsmAEADEncryptAssociatedDataMaxLength</a>           | 0..1         | [ECUC_Csm_00159] |
| <a href="#">CsmAEADEncryptCiphertextMaxLength</a>               | 0..1         | [ECUC_Csm_00160] |
| <a href="#">CsmAEADEncryptPlaintextMaxLength</a>                | 0..1         | [ECUC_Csm_00158] |
| <a href="#">CsmAEADEncryptTagLength</a>                         | 0..1         | [ECUC_Csm_00161] |
| <a href="#">CsmAEADEncryptAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00297] |
| <a href="#">CsmAEADEncryptAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00298] |
| <a href="#">CsmAEADEncryptAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00299] |
| <a href="#">CsmAEADEncryptKeyRef</a>                            | 1            | [ECUC_Csm_00157] |
| <a href="#">CsmAEADEncryptQueueRef</a>                          | 1            | [ECUC_Csm_00156] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00074] Definition of EcucEnumerationParamDef CsmAEADEncryptAlgorithmFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES   | – |              |
|   | CRYPTO_ALGOFAM_AES  | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_EEA3   | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00075] Definition of EcucIntegerParamDef CsmAEADEncryptAlgorithmKeyLength [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmKeyLength         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>     |   |              |
| <b>Description</b>                      | Size of the AEAD encryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                      |   |              |
| <b>Range</b>                            | 1 .. 4294967295                          |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false                                    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                  | X | All Variants |
|   | <b>Link time</b>                         | – |              |
|   | <b>Post-build time</b>                   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                  | X | All Variants |
|   | <b>Link time</b>                         | – |              |
|   | <b>Post-build time</b>                   | – |              |
| <b>Scope / Dependency</b>               | scope: local                             |   |              |

]

### [ECUC\_Csm\_00076] Definition of EcucEnumerationParamDef CsmAEADEncryptAlgorithmMode [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmMode                               |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>                      |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_12ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_20ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_8ROUNDS                                   | – |              |
|   | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_GCM                                       | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00278] Definition of EcucEnumerationParamDef CsmAEADEncryptAlgorithmSecondaryFamily [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmSecondaryFamily                   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>                     |   |              |
| <b>Description</b>                      | Defines the secondary family used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                  |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET                                   | – |              |
|   | CRYPTO_ALGOFAM_POLY1305                                  | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

**[ECUC\_Csm\_00159] Definition of EcuIntegerParamDef CsmAEADEncryptAssociatedDataMaxLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAssociatedDataMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input associated data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcuIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

**[ECUC\_Csm\_00160] Definition of EcuIntegerParamDef CsmAEADEncryptCiphertextMaxLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptCiphertextMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the output ciphertext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcuIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

**[ECUC\_Csm\_00158] Definition of EcucIntegerParamDef CsmAEADEncryptPlainTextMaxLength**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptPlainTextMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>   |   |              |
| <b>Description</b>                      | Size of the input plaintext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]

**[ECUC\_Csm\_00161] Definition of EcucIntegerParamDef CsmAEADEncryptTagLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptTagLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the output tag length buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

**[ECUC\_Csm\_00297] Definition of EcucReferenceDef CsmAEADEncryptAlgorithmFamilyCustomRef**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmAEADEncryptAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00298] Definition of EcucReferenceDef CsmAEADEncryptAlgorithmModeCustomRef**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmAEADEncryptAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00299] Definition of EcucReferenceDef CsmAEADEncryptAlgorithmSecondaryFamilyCustomRef**

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmAEADEncryptAlgorithmSecondaryFamilyCustomRef                                  |  |  |
| <b>Parent Container</b> | <a href="#">CsmAEADEncryptConfig</a>   |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family container in the Crypto Driver |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmAEADEncryptSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00157] Definition of EcucReferenceDef CsmAEADEncryptKeyRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptKeyRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>                                 |   |              |
| <b>Description</b>                      | This parameter refers to the key used for that encryption primitive. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmKey</a>                                  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00156] Definition of EcucReferenceDef CsmAEADEncryptQueue Ref [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADEncryptQueueRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADEncryptConfig</a>                                   |   |              |
| <b>Description</b>                      | This parameter refers to the queue used for that encryption primitive. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmQueue</a>                                  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |






△


|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Post-build time</b> | - |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

└


**10.2.25 CsmAEADDecrypt**

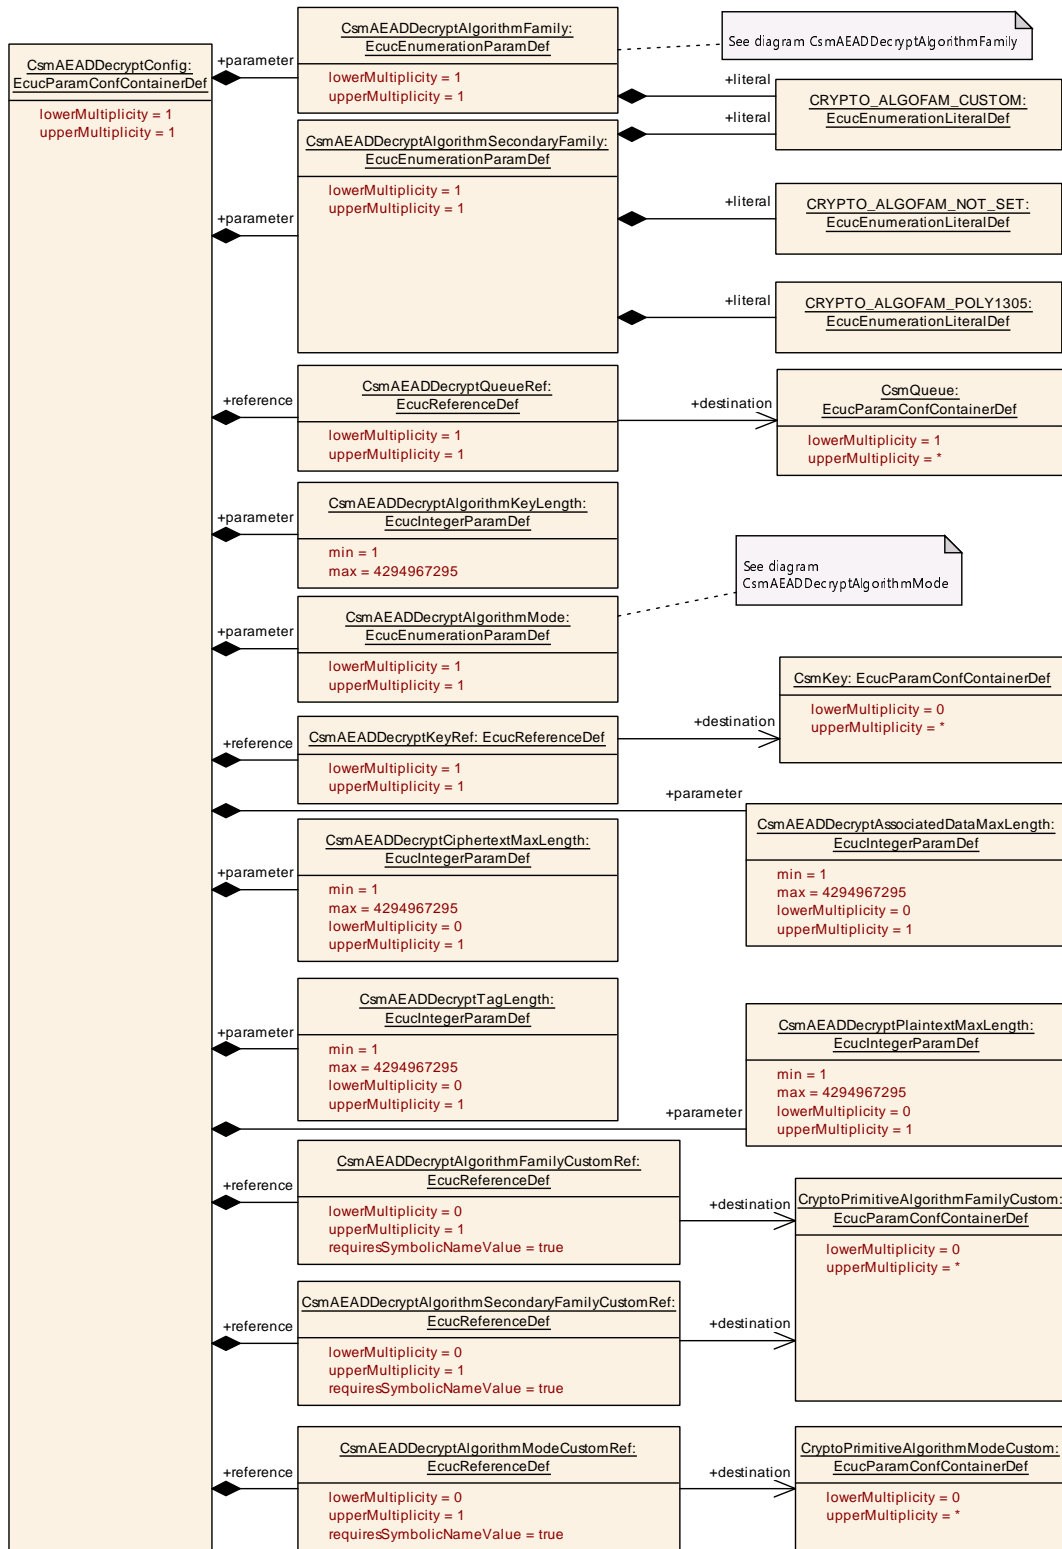

**Figure 10.20: CsmAEADDecrypt Layout**

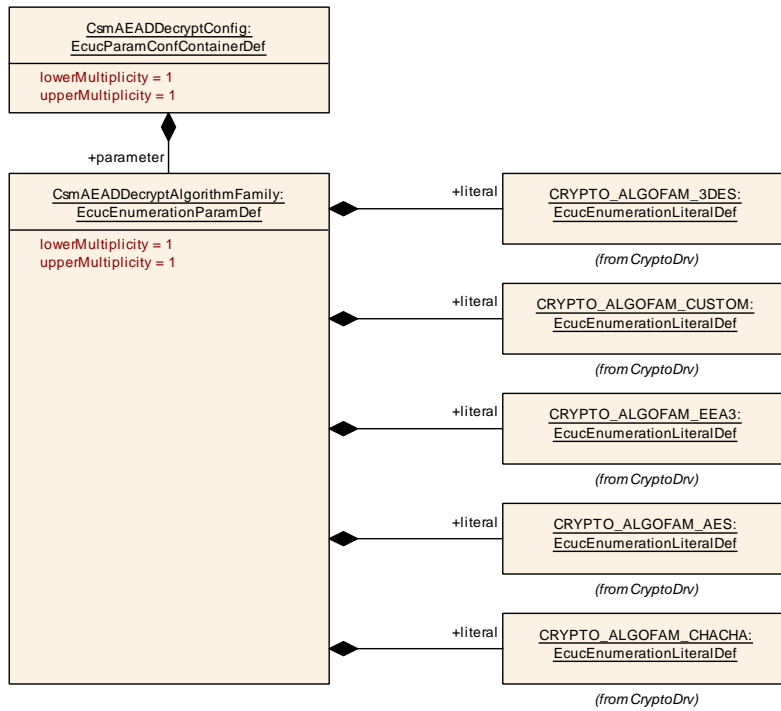

**Figure 10.21: CsmAEADDecryptAlgorithmFamily Layout**

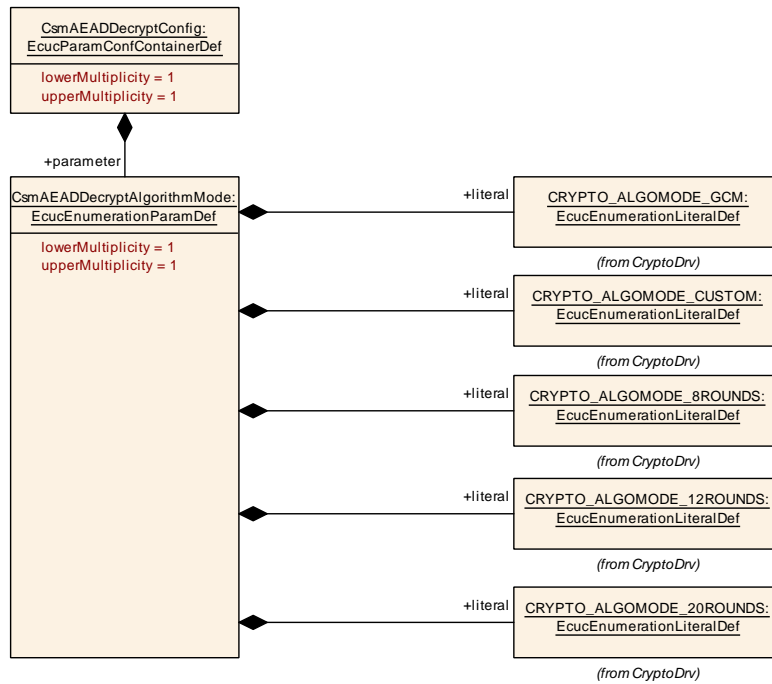

**Figure 10.22: CsmAEADDecryptAlgorithmMode Layout**

**[ECUC\_Csm\_00027] Definition of EcucParamConfContainerDef CsmAEADDe-  
crypt** [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmAEADDecrypt                              |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>               |
| <b>Description</b>              | Configuration of AEAD decryption primitives |
| <b>Configuration Parameters</b> |   |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                  |              |  |
|--------------------------------------|--------------|--|
| Container Name                       | Multiplicity | Scope / Dependency   |
| <a href="#">CsmAEADDecryptConfig</a> | 1            | Container for configuration of a CSM decryption interface. The container name serves as a symbolic name for the identifier of an decryption interface. |

]

## 10.2.26 CsmAEADDecryptConfig

### [ECUC\_Csm\_00080] Definition of EcucParamConfContainerDef CsmAEADDecryptConfig [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmAEADDecryptConfig   |
| <b>Parent Container</b>         | <a href="#">CsmAEADDecrypt</a>   |
| <b>Description</b>              | Container for configuration of a CSM decryption interface. The container name serves as a symbolic name for the identifier of an decryption interface. |
| <b>Configuration Parameters</b> |  |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmAEADDecryptAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00082] |
| <a href="#">CsmAEADDecryptAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00083] |
| <a href="#">CsmAEADDecryptAlgorithmMode</a>                     | 1            | [ECUC_Csm_00084] |
| <a href="#">CsmAEADDecryptAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00277] |
| <a href="#">CsmAEADDecryptAssociatedDataMaxLength</a>           | 0..1         | [ECUC_Csm_00163] |
| <a href="#">CsmAEADDecryptCiphertextMaxLength</a>               | 0..1         | [ECUC_Csm_00162] |
| <a href="#">CsmAEADDecryptPlaintextMaxLength</a>                | 0..1         | [ECUC_Csm_00165] |
| <a href="#">CsmAEADDecryptTagLength</a>                         | 0..1         | [ECUC_Csm_00164] |
| <a href="#">CsmAEADDecryptAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00300] |
| <a href="#">CsmAEADDecryptAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00301] |
| <a href="#">CsmAEADDecryptAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00302] |
| <a href="#">CsmAEADDecryptKeyRef</a>                            | 1            | [ECUC_Csm_00086] |
| <a href="#">CsmAEADDecryptQueueRef</a>                          | 1            | [ECUC_Csm_00081] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00082] Definition of EcucEnumerationParamDef CsmAEADDecryptAlgorithmFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES   | – |              |
|   | CRYPTO_ALGOFAM_AES  | – |              |
|   | CRYPTO_ALGOFAM_CHACHA   | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_EEA3   | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00083] Definition of EcucIntegerParamDef CsmAEADDecryptAlgorithmKeyLength [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAlgorithmKeyLength         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>     |   |              |
| <b>Description</b>                      | Size of the AEAD decryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                      |   |              |
| <b>Range</b>                            | 1 .. 4294967295                          |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false                                    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                  | X | All Variants |
|   | <b>Link time</b>                         | – |              |
|   | <b>Post-build time</b>                   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                  | X | All Variants |
|   | <b>Link time</b>                         | – |              |
|   | <b>Post-build time</b>                   | – |              |
| <b>Scope / Dependency</b>               | scope: local                             |   |              |

]

**[ECUC\_Csm\_00084] Definition of EcucEnumerationParamDef CsmAEADDecryptAlgorithmMode** [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAlgorithmMode                               |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>                      |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_12ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_20ROUNDS                                  | – |              |
|   | CRYPTO_ALGOMODE_8ROUNDS                                   | – |              |
|   | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_GCM                                       | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00277] Definition of EcucEnumerationParamDef CsmAEADDecryptAlgorithmSecondaryFamily** [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmAEADDecryptAlgorithmSecondaryFamily                   |   |              |
| <b>Parent Container</b>          | <a href="#">CsmAEADDecryptConfig</a>                     |   |              |
| <b>Description</b>               | Defines the secondary family used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                  |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET                                   | – |              |
|                                  | CRYPTO_ALGOFAM_POLY1305                                  | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                   | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

**[ECUC\_Csm\_00163] Definition of EcuIntegerParamDef CsmAEADDecryptAssociatedDataMaxLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAssociatedDataMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input associated data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcuIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.   |   |              |

]

**[ECUC\_Csm\_00162] Definition of EcuIntegerParamDef CsmAEADDecryptCiphertextMaxLength**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptCiphertextMaxLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>   |   |              |
| <b>Description</b>                      | Size of the input ciphertext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcuIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT   |   |              |

]

**[ECUC\_Csm\_00165] Definition of EcucIntegerParamDef CsmAEADDecryptPlainTextMaxLength**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptPlainTextMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>   |   |              |
| <b>Description</b>                      | Size of the output plaintext buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]

**[ECUC\_Csm\_00164] Definition of EcucIntegerParamDef CsmAEADDecryptTagLength**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptTagLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>   |   |              |
| <b>Description</b>                      | Size of the input tag buffer in BITS for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation." |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]



**[ECUC\_Csm\_00300] Definition of EcucReferenceDef CsmAEADDecryptAlgorithmFamilyCustomRef** [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmAEADDecryptAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00301] Definition of EcucReferenceDef CsmAEADDecryptAlgorithmModeCustomRef** [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmAEADDecryptAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00302] Definition of EcucReferenceDef CsmAEADDecryptAlgorithmSecondaryFamilyCustomRef** [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmAEADDecryptAlgorithmSecondaryFamilyCustomRef                                  |  |  |
| <b>Parent Container</b> | <a href="#">CsmAEADDecryptConfig</a>   |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family container in the Crypto Driver |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmAEADDecryptSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00086] Definition of EcucReferenceDef CsmAEADDecryptKeyRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptKeyRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>                                 |   |              |
| <b>Description</b>                      | This parameter refers to the key used for that decryption primitive. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmKey</a>                                  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00081] Definition of EcucReferenceDef CsmAEADDecryptQueue Ref [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmAEADDecryptQueueRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmAEADDecryptConfig</a>                                   |   |              |
| <b>Description</b>                      | This parameter refers to the queue used for that decryption primitive. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Reference to <a href="#">CsmQueue</a>                                  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |



△

|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Post-build time</b> | - |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

└

### 10.2.27 CsmSignatureGenerate


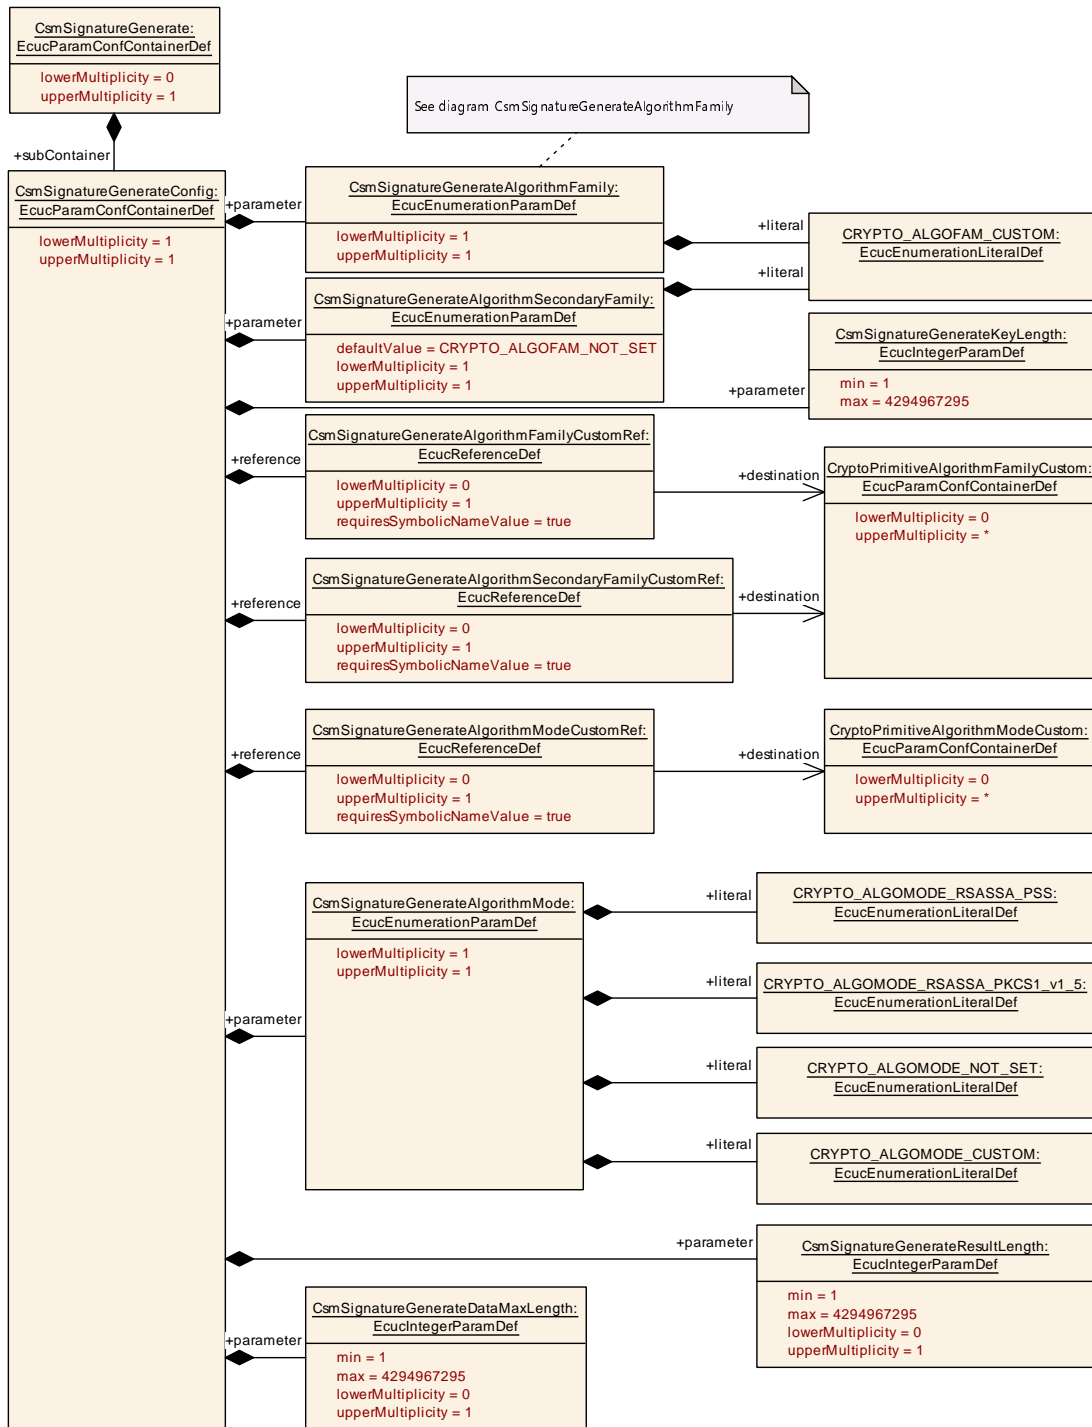


Figure 10.23: CsmSignatureGenerate Layout

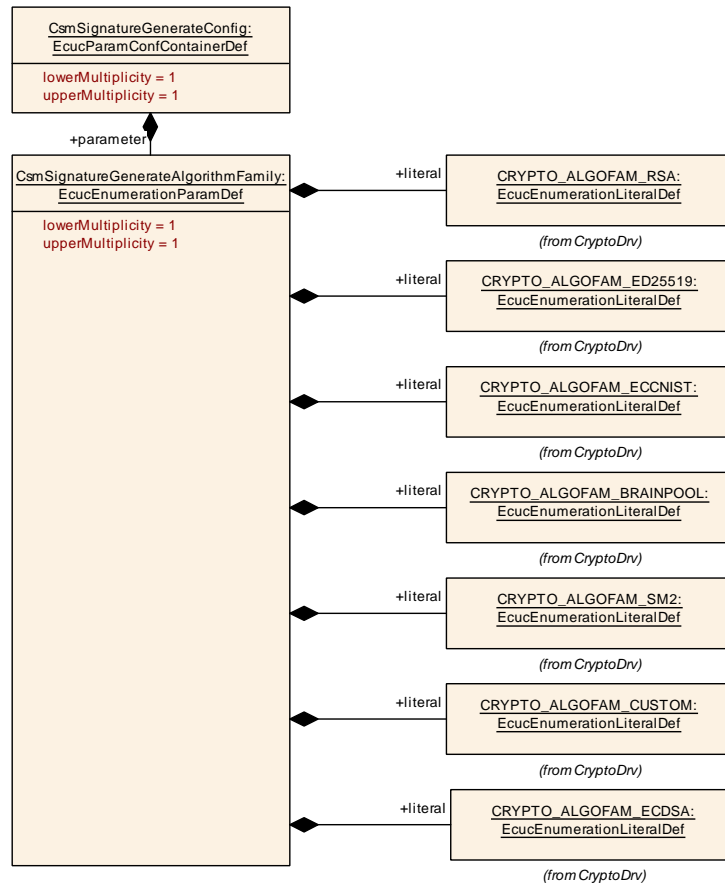

**Figure 10.24: CsmSignatureGenerateAlgorithmFamily Layout**

**[ECUC\_Csm\_00028] Definition of EcucParamConfContainerDef CsmSignature Generate**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmSignatureGenerate                           |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>                  |
| <b>Description</b>              | Configurations of SignatureGenerate primitives |
| <b>Configuration Parameters</b> |  |

**No Included Parameters**

| <b>Included Containers</b>                 |                     |   |
|--|---------------------|---|
| <b>Container Name</b>                      | <b>Multiplicity</b> | <b>Scope / Dependency</b>   |
| <a href="#">CsmSignatureGenerateConfig</a> | 1                   | Container for configuration of a CSM signature generation interface. The container name serves as a symbolic name for the identifier of signature generation interface. |

]

## 10.2.28 CsmSignatureGenerateConfig

### [ECUC\_Csm\_00087] Definition of EcucParamConfContainerDef CsmSignatureGenerateConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmSignatureGenerateConfig  |
| <b>Parent Container</b>         | <a href="#">CsmSignatureGenerate</a>  |
| <b>Description</b>              | Container for configuration of a CSM signature generation interface. The container name serves as a symbolic name for the identifier of signature generation interface. |
| <b>Configuration Parameters</b> |   |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmSignatureGenerateAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00089] |
| <a href="#">CsmSignatureGenerateAlgorithmMode</a>                     | 1            | [ECUC_Csm_00091] |
| <a href="#">CsmSignatureGenerateAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00183] |
| <a href="#">CsmSignatureGenerateDataMaxLength</a>                     | 0..1         | [ECUC_Csm_00169] |
| <a href="#">CsmSignatureGenerateKeyLength</a>                         | 1            | [ECUC_Csm_00090] |
| <a href="#">CsmSignatureGenerateResultLength</a>                      | 0..1         | [ECUC_Csm_00170] |
| <a href="#">CsmSignatureGenerateAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00303] |
| <a href="#">CsmSignatureGenerateAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00304] |
| <a href="#">CsmSignatureGenerateAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00305] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00089] Definition of EcucEnumerationParamDef CsmSignatureGenerateAlgorithmFamily [

|                                 |   |   |
|---------------------------------|---|---|
| <b>Parameter Name</b>           | CsmSignatureGenerateAlgorithmFamily   |   |
| <b>Parent Container</b>         | <a href="#">CsmSignatureGenerateConfig</a>  |   |
| <b>Description</b>              | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |
| <b>Multiplicity</b>             | 1   |   |
| <b>Type</b>                     | EcucEnumerationParamDef   |   |
| <b>Range</b>                    | CRYPTO_ALGOFAM_BRAINPOOL  | – |
|                                 | CRYPTO_ALGOFAM_CUSTOM   | – |
|                                 | CRYPTO_ALGOFAM_ECCNIST  | – |
|                                 | CRYPTO_ALGOFAM_ECDSA  | – |
|                                 | CRYPTO_ALGOFAM_ED25519  | – |
|                                 | CRYPTO_ALGOFAM_RSA  | – |
|                                 | CRYPTO_ALGOFAM_SM2  | – |
| <b>Post-Build Variant Value</b> | false   |   |





|   |                         |   |              |
|---|-------------------------|---|--------------|
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local            |   |              |

]

### [ECUC\_Csm\_00091] Definition of EcucEnumerationParamDef CsmSignatureGenerateAlgorithmMode [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureGenerateAlgorithmMode                         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureGenerateConfig</a>                |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
|   | CRYPTO_ALGOMODE_RSASSA_PKCS1_v1_5                         | – |              |
|   | CRYPTO_ALGOMODE_RSASSA_PSS                                | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00183] Definition of EcucEnumerationParamDef CsmSignatureGenerateAlgorithmSecondaryFamily [

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmSignatureGenerateAlgorithmSecondaryFamily              |   |  |
| <b>Parent Container</b> | <a href="#">CsmSignatureGenerateConfig</a>                |   |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef                                   |   |  |
| <b>Range</b>            | CRYPTO_ALGOFAM_BLAKE_1_256                                | – |  |
|                         |   |   |  |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOFAM_BLAKE_1_512  | - |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256 | - |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512 | - |              |
|   | CRYPTO_ALGOFAM_CUSTOM       | - |              |
|   | CRYPTO_ALGOFAM_NOT_SET      | - |              |
|   | CRYPTO_ALGOFAM_RIPEMD160    | - |              |
|   | CRYPTO_ALGOFAM_SHA1         | - |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | - |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | - |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | - |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | - |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | - |              |
|   | CRYPTO_ALGOFAM_SHAKE256     | - |              |
| <b>Default value</b>                    | CRYPTO_ALGOFAM_NOT_SET      |   |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | - |              |
|   | <b>Post-build time</b>      | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | - |              |
|   | <b>Post-build time</b>      | - |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00169] Definition of EcucIntegerParamDef CsmSignatureGenerateDataMaxLength [

|                         |  |  |
|-------------------------|--|--|
| <b>Parameter Name</b>   | CsmSignatureGenerateDataMaxLength  |  |
| <b>Parent Container</b> | CsmSignatureGenerateConfig   |  |
| <b>Description</b>      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |  |
| <b>Multiplicity</b>     | 0..1   |  |
| <b>Type</b>             | EcucIntegerParamDef  |  |
| <b>Range</b>            | 1 .. 4294967295  |  |







|   |   |   |              |
|---|---|---|--------------|
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00090] Definition of EcucIntegerParamDef CsmSignatureGenerateKeyLength [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureGenerateKeyLength               |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Size of the signature generate key in bytes |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                         |   |              |
| <b>Range</b>                            | 1 .. 4294967295                             |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false                                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | – |              |
|   | <b>Post-build time</b>                      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                     | X | All Variants |
|   | <b>Link time</b>                            | – |              |
|   | <b>Post-build time</b>                      | – |              |
| <b>Scope / Dependency</b>               | scope: local                                |   |              |

]

### [ECUC\_Csm\_00170] Definition of EcucIntegerParamDef CsmSignatureGenerateResultLength [

|                         |   |  |  |
|-------------------------|---|--|--|
| <b>Parameter Name</b>   | CsmSignatureGenerateResultLength  |  |  |
| <b>Parent Container</b> | <a href="#">CsmSignatureGenerateConfig</a>  |  |  |
| <b>Description</b>      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |  |  |
| <b>Multiplicity</b>     | 0..1  |  |  |
| <b>Type</b>             | EcucIntegerParamDef   |  |  |
| <b>Range</b>            | 1 .. 4294967295   |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00303] Definition of EcucReferenceDef CsmSignatureGenerateAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureGenerateAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureGenerateConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmSignatureGenerateAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00304] Definition of EcucReferenceDef CsmSignatureGenerateAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureGenerateAlgorithmModeCustomRef                       |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureGenerateConfig</a>                       |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |



△

|                           |  |   |  |
|---------------------------|--|---|--|
|                           | <b>Link time</b>   | – |  |
|                           | <b>Post-build time</b>   | – |  |
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmSignatureGenerateAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |  |


]

### [ECUC\_Csm\_00305] Definition of EcucReferenceDef CsmSignatureGenerateAlgorithmSecondaryFamilyCustomRef [


|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureGenerateAlgorithmSecondaryFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureGenerateConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmSignatureGenerateSecondary AlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.29 CsmSignatureVerify**

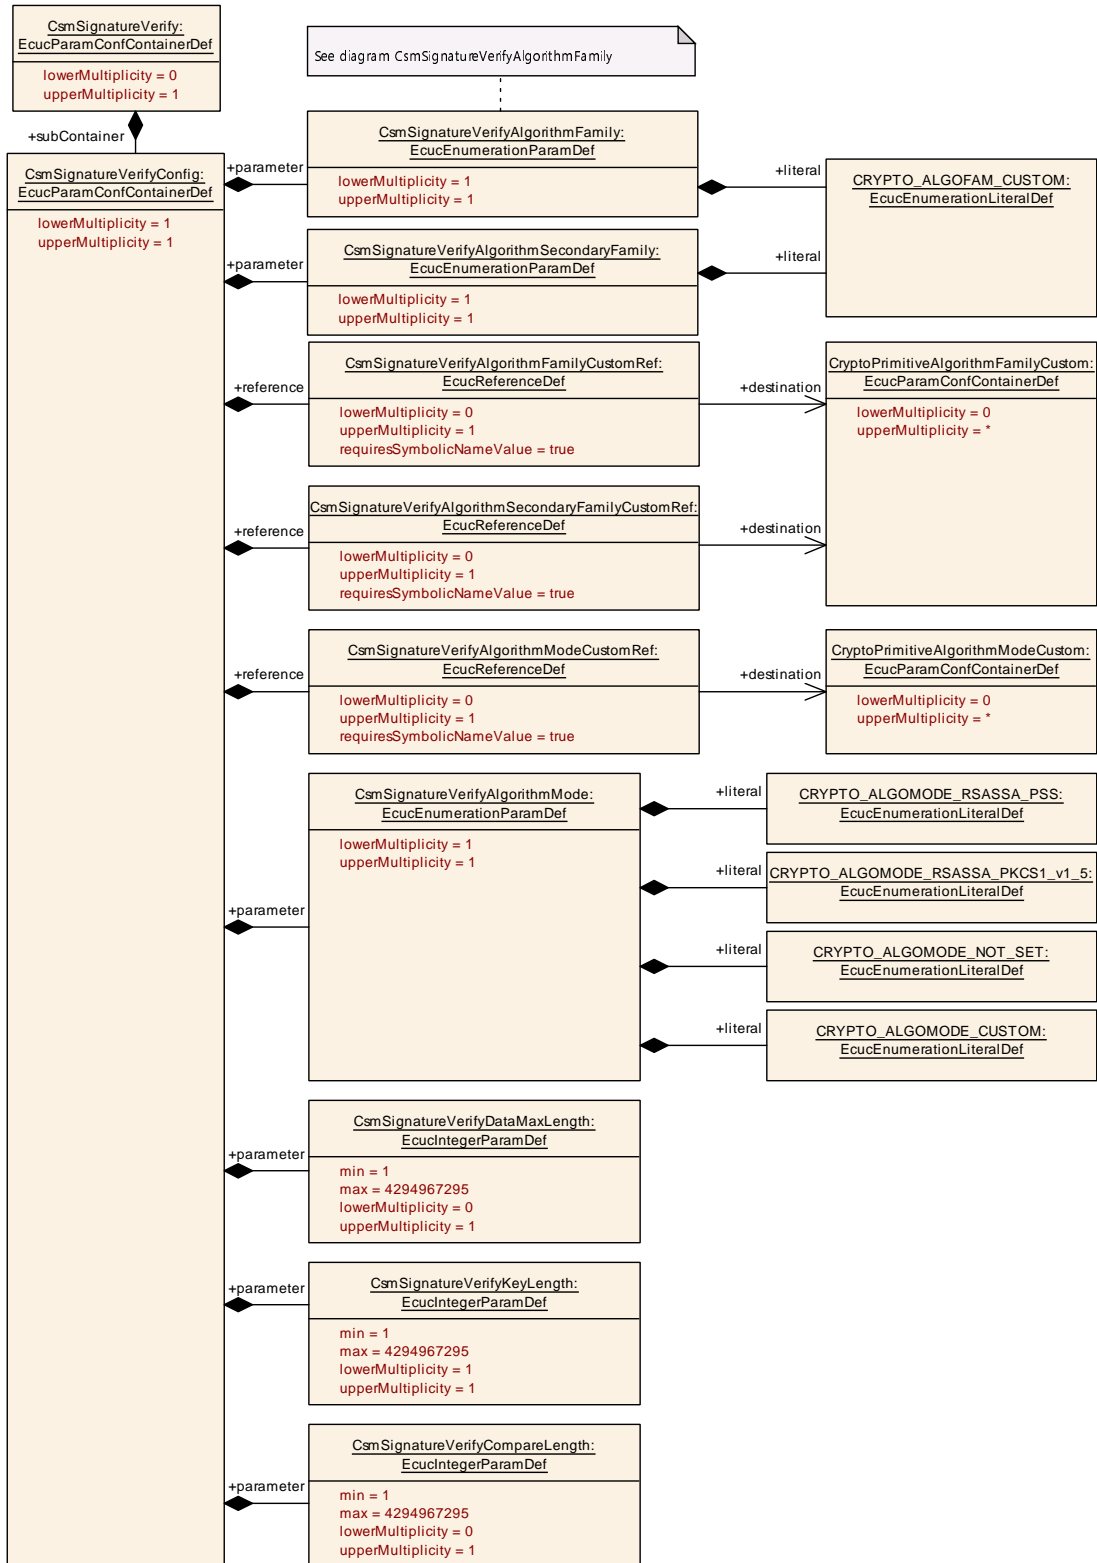

**Figure 10.25: CsmSignatureVerify Layout**

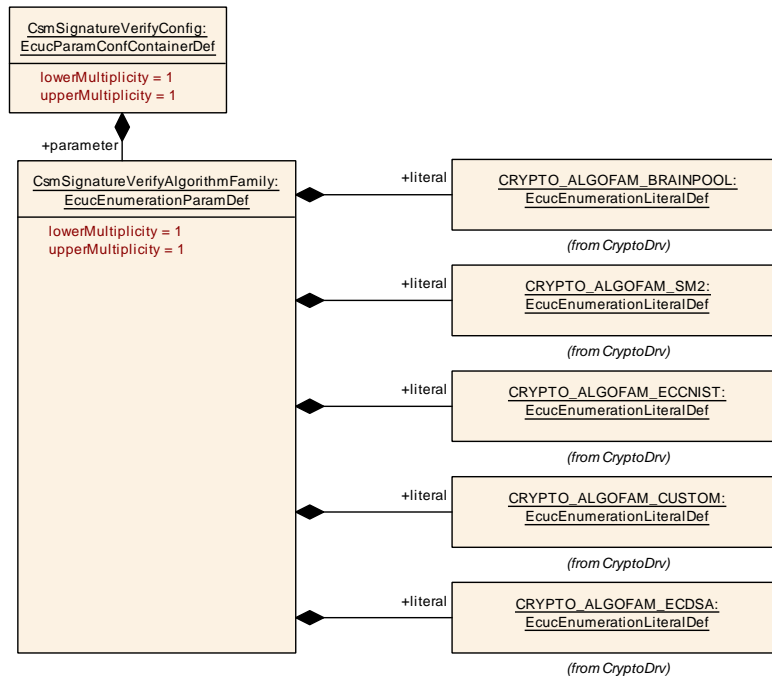

**Figure 10.26: CsmSignatureVerifyAlgorithmFamily Layout**

**[ECUC\_Csm\_00029] Definition of EcucParamConfContainerDef CsmSignature Verify**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmSignatureVerify                           |
| <b>Parent Container</b>         | CsmPrimitives                                |
| <b>Description</b>              | Configurations of SignatureVerify primitives |
| <b>Configuration Parameters</b> |  |

No Included Parameters

| Included Containers      |              |   |
|--------------------------|--------------|---|
| Container Name           | Multiplicity | Scope / Dependency  |
| CsmSignatureVerifyConfig | 1            | Container for configuration of a CSM signature verification interface. The container name serves as a symbolic name for the identifier of signature verification interface. |

]

**10.2.30 CsmSignatureVerifyConfig**

**[ECUC\_Csm\_00094] Definition of EcucParamConfContainerDef CsmSignature VerifyConfig**

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmSignatureVerifyConfig  |
| <b>Parent Container</b>         | <a href="#">CsmSignatureVerify</a>  |
| <b>Description</b>              | Container for configuration of a CSM signature verification interface. The container name serves as a symbolic name for the identifier of signature verification interface. |
| <b>Configuration Parameters</b> |   |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmSignatureVerifyAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00096] |
| <a href="#">CsmSignatureVerifyAlgorithmMode</a>                     | 1            | [ECUC_Csm_00098] |
| <a href="#">CsmSignatureVerifyAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00172] |
| <a href="#">CsmSignatureVerifyCompareLength</a>                     | 0..1         | [ECUC_Csm_00176] |
| <a href="#">CsmSignatureVerifyDataMaxLength</a>                     | 0..1         | [ECUC_Csm_00175] |
| <a href="#">CsmSignatureVerifyKeyLength</a>                         | 1            | [ECUC_Csm_00192] |
| <a href="#">CsmSignatureVerifyAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00306] |
| <a href="#">CsmSignatureVerifyAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00307] |
| <a href="#">CsmSignatureVerifyAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00308] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00096] Definition of EcucEnumerationParamDef CsmSignatureVerifyAlgorithmFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyAlgorithmFamily   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_BRAINPOOL  | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_ECCNIST  | – |              |
|   | CRYPTO_ALGOFAM_ECDSA  | – |              |
|   | CRYPTO_ALGOFAM_ED25519  | – |              |
|   | CRYPTO_ALGOFAM_RSA  | – |              |
|   | CRYPTO_ALGOFAM_SM2  | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |





|                           |              |
|---------------------------|--------------|
| <b>Scope / Dependency</b> | scope: local |
|---------------------------|--------------|

]

### [ECUC\_Csm\_00098] Definition of EcucEnumerationParamDef CsmSignatureVerifyAlgorithmMode [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyAlgorithmMode                           |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>                  |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
|   | CRYPTO_ALGOMODE_RSASSA_PKCS1_v1_5                         | – |              |
|   | CRYPTO_ALGOMODE_RSASSA_PSS                                | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00172] Definition of EcucEnumerationParamDef CsmSignatureVerifyAlgorithmSecondaryFamily [

|                         |   |   |  |
|-------------------------|---|---|--|
| <b>Parameter Name</b>   | CsmSignatureVerifyAlgorithmSecondaryFamily  |   |  |
| <b>Parent Container</b> | <a href="#">CsmSignatureVerifyConfig</a>  |   |  |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |  |
| <b>Multiplicity</b>     | 1   |   |  |
| <b>Type</b>             | EcucEnumerationParamDef   |   |  |
| <b>Range</b>            | CRYPTO_ALGOFAM_BLAKE_1_256  | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_1_512  | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_2s_256   | – |  |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOFAM_BLAKE_2s_512 | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM       | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET      | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160    | – |              |
|   | CRYPTO_ALGOFAM_SHA1         | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256     | – |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00176] Definition of EcucIntegerParamDef CsmSignatureVerify CompareLength [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyCompareLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input signature buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |







|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00175] Definition of EcucIntegerParamDef CsmSignatureVerifyData MaxLength [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyDataMaxLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>   |   |              |
| <b>Description</b>                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT.  |   |              |

]

### [ECUC\_Csm\_00192] Definition of EcucIntegerParamDef CsmSignatureVerifyKey Length [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyKeyLength               |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Size of the signature verify key in bytes |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                       |   |              |
| <b>Range</b>                            | 1 .. 4294967295                           |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false                                     |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                   | X | All Variants |
|   | <b>Link time</b>                          | – |              |



△

|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
|                                  | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

]

### [ECUC\_Csm\_00306] Definition of EcucReferenceDef CsmSignatureVerifyAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmSignatureVerifyAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00307] Definition of EcucReferenceDef CsmSignatureVerifyAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmSignatureVerifyAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

**[ECUC\_Csm\_00308] Definition of EcucReferenceDef CsmSignatureVerifyAlgorithmSecondaryFamilyCustomRef [**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmSignatureVerifyAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmSignatureVerifyConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmSignatureVerifySecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.31 CsmRandomGenerate**

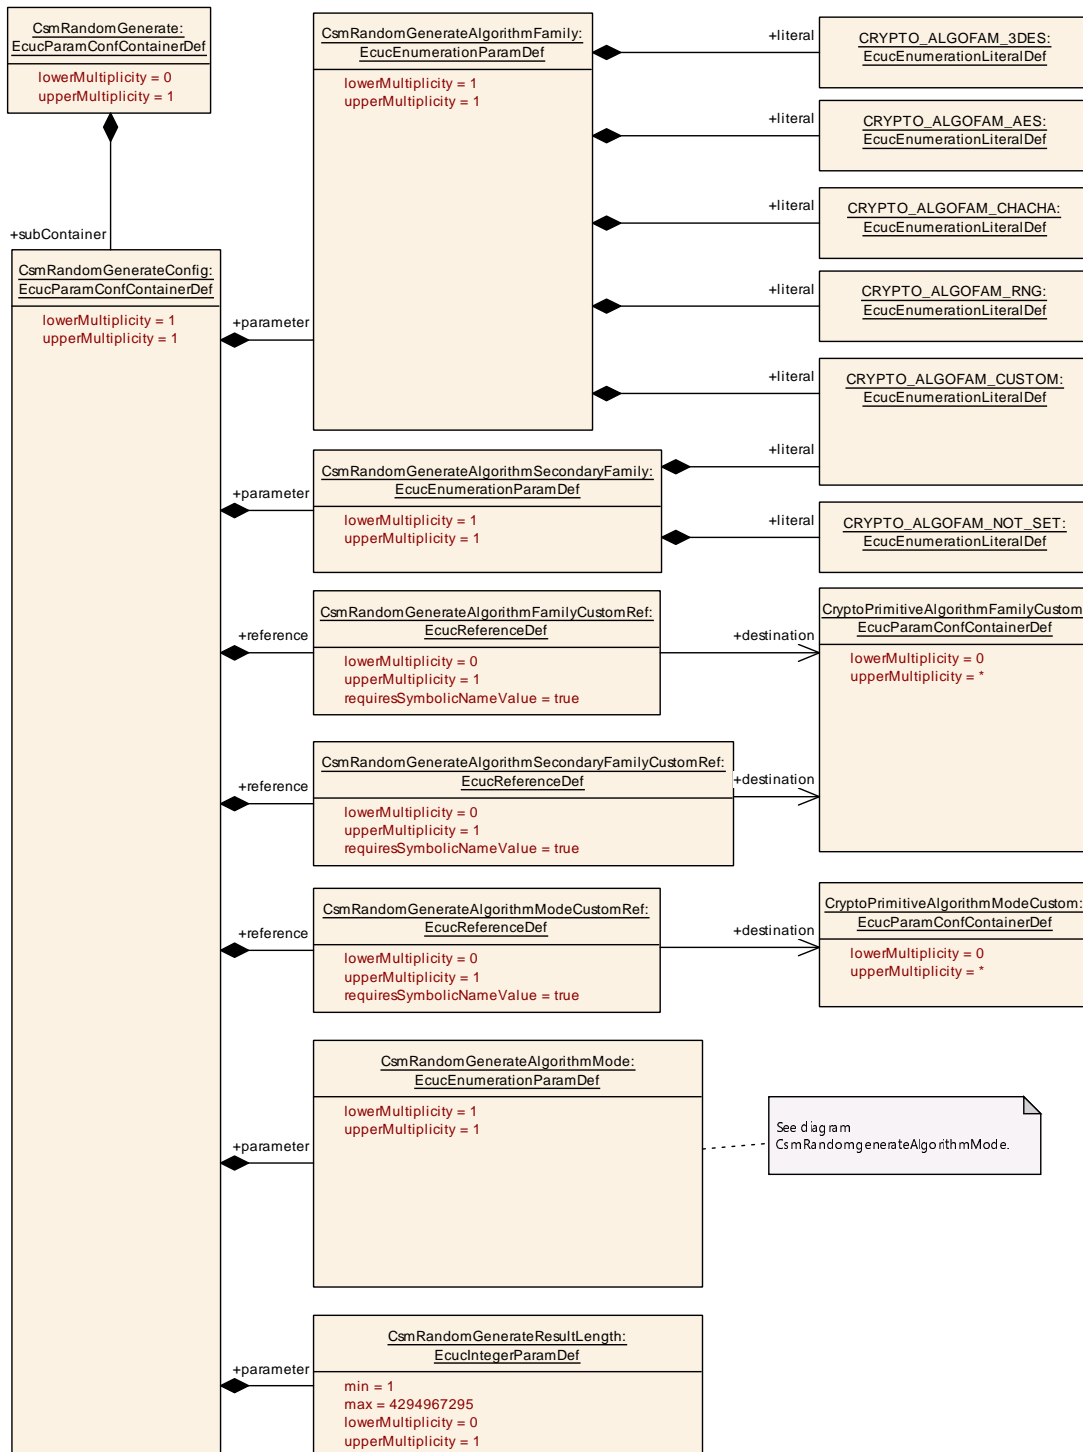

**Figure 10.27: CsmRandomGenerate Layout**

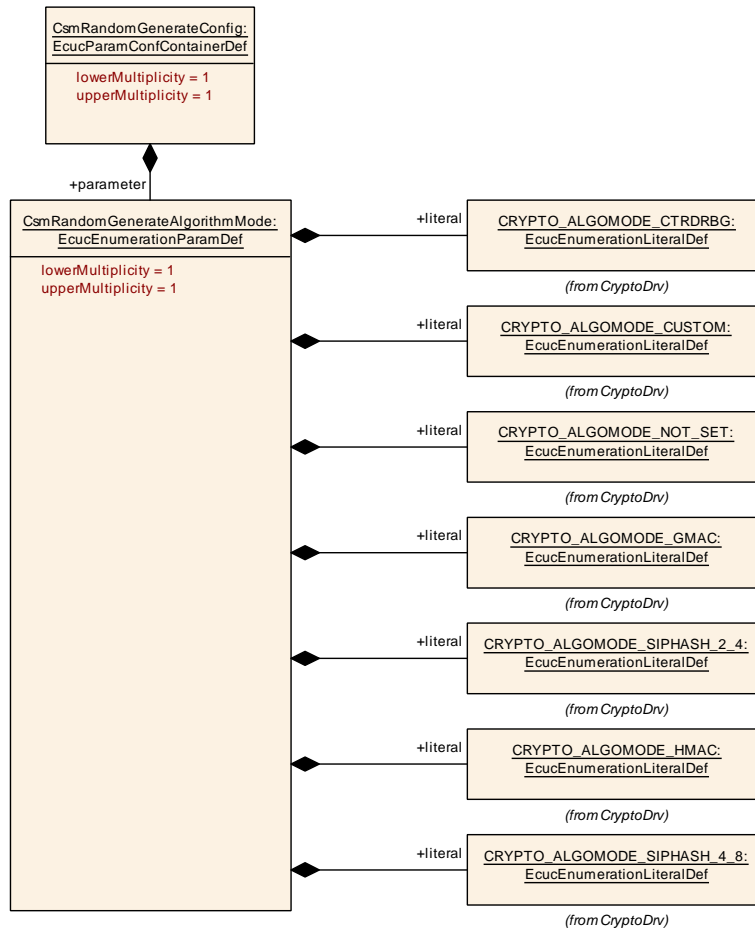


Figure 10.28: CsmRandomGenerateAlgorithmMode Layout

**[ECUC\_Csm\_00031] Definition of EcucParamConfContainerDef CsmRandom Generate**

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmRandomGenerate                           |
| <b>Parent Container</b>         | CsmPrimitives                               |
| <b>Description</b>              | Configurations of RandomGenerate primitives |
| <b>Configuration Parameters</b> |   |

No Included Parameters

| Included Containers     |              |   |
|-------------------------|--------------|---|
| Container Name          | Multiplicity | Scope / Dependency  |
| CsmRandomGenerateConfig | 1            | Container for configuration of a CSM random generator. The container name serves as a symbolic name for the identifier of a random generator configuration. |

]

### 10.2.32 CsmRandomGenerateConfig

#### [ECUC\_Csm\_00103] Definition of EcucParamConfContainerDef CsmRandomGenerateConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmRandomGenerateConfig   |
| <b>Parent Container</b>         | <a href="#">CsmRandomGenerate</a>   |
| <b>Description</b>              | Container for configuration of a CSM random generator. The container name serves as a symbolic name for the identifier of a random generator configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmRandomGenerateAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00105] |
| <a href="#">CsmRandomGenerateAlgorithmMode</a>                     | 1            | [ECUC_Csm_00107] |
| <a href="#">CsmRandomGenerateAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00178] |
| <a href="#">CsmRandomGenerateResultLength</a>                      | 0..1         | [ECUC_Csm_00106] |
| <a href="#">CsmRandomGenerateAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00309] |
| <a href="#">CsmRandomGenerateAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00310] |
| <a href="#">CsmRandomGenerateAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00311] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

#### [ECUC\_Csm\_00105] Definition of EcucEnumerationParamDef CsmRandomGenerateAlgorithmFamily [

|                         |   |   |
|-------------------------|---|---|
| <b>Parameter Name</b>   | CsmRandomGenerateAlgorithmFamily  |   |
| <b>Parent Container</b> | <a href="#">CsmRandomGenerateConfig</a>   |   |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |
| <b>Multiplicity</b>     | 1   |   |
| <b>Type</b>             | EcucEnumerationParamDef   |   |
| <b>Range</b>            | CRYPTO_ALGOFAM_3DES   | – |
|                         | CRYPTO_ALGOFAM_AES  | – |
|                         | CRYPTO_ALGOFAM_BLAKE_1_256  | – |
|                         | CRYPTO_ALGOFAM_BLAKE_1_512  | – |
|                         | CRYPTO_ALGOFAM_BLAKE_2s_256   | – |
|                         | CRYPTO_ALGOFAM_BLAKE_2s_512   | – |
|                         | CRYPTO_ALGOFAM_CHACHA   | – |
|                         | CRYPTO_ALGOFAM_CUSTOM   | – |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOFAM_EEA3         | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160    | – |              |
|   | CRYPTO_ALGOFAM_RNG          | – |              |
|   | CRYPTO_ALGOFAM_SHA1         | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512     | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224 | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256 | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384     | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128     | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256     | – |              |
|   | CRYPTO_ALGOFAM_SM3          | – |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00107] Definition of EcucEnumerationParamDef CsmRandomGenerateAlgorithmMode [

|                         |   |   |
|-------------------------|---|---|
| <b>Parameter Name</b>   | CsmRandomGenerateAlgorithmMode                            |   |
| <b>Parent Container</b> | <a href="#">CsmRandomGenerateConfig</a>                   |   |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service |   |
| <b>Multiplicity</b>     | 1   |   |
| <b>Type</b>             | EcucEnumerationParamDef                                   |   |
| <b>Range</b>            | CRYPTO_ALGOMODE_CTRDRBG                                   | – |
|                         | CRYPTO_ALGOMODE_CUSTOM                                    | – |
|                         | CRYPTO_ALGOMODE_GMAC                                      | – |
|                         | CRYPTO_ALGOMODE_HMAC                                      | – |
|                         | CRYPTO_ALGOMODE_NOT_SET                                   | – |





|   |                             |   |              |
|---|-----------------------------|---|--------------|
|   | CRYPTO_ALGOMODE_SIPHASH_2_4 | – |              |
|   | CRYPTO_ALGOMODE_SIPHASH_4_8 | – |              |
| <b>Post-Build Variant Value</b>         | false                       |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>     | X | All Variants |
|   | <b>Link time</b>            | – |              |
|   | <b>Post-build time</b>      | – |              |
| <b>Scope / Dependency</b>               | scope: local                |   |              |

]

### [ECUC\_Csm\_00178] Definition of EcucEnumerationParamDef CsmRandomGenerateAlgorithmSecondaryFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmRandomGenerateAlgorithmSecondaryFamily                   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmRandomGenerateConfig</a>                     |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                     |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM                                       | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET                                      | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                     | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                      | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                     | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                      | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00106] Definition of EcucIntegerParamDef CsmRandomGenerateResultLength [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmRandomGenerateResultLength  |  |  |
| <b>Parent Container</b> | <a href="#">CsmRandomGenerateConfig</a>  |  |  |
| <b>Description</b>      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |
| <b>Type</b>             | EcucIntegerParamDef  |  |  |







|   |   |   |              |
|---|---|---|--------------|
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | –   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter is only relevant if CsmJobInterfaceUsePort is configured as CRYPTO_USE_PORT. |   |              |

]

### [ECUC\_Csm\_00309] Definition of EcucReferenceDef CsmRandomGenerateAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmRandomGenerateAlgorithmFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmRandomGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmRandomGenerateAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00310] Definition of EcucReferenceDef CsmRandomGenerateAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmRandomGenerateAlgorithmModeCustomRef                          |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmRandomGenerateConfig</a>                          |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |



△

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This reference shall only be present if CsmRandomGenerateAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

### [ECUC\_Csm\_00311] Definition of EcucReferenceDef CsmRandomGenerateAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmRandomGenerateAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmRandomGenerateConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmRandomGenerateSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.33 CsmCustom**

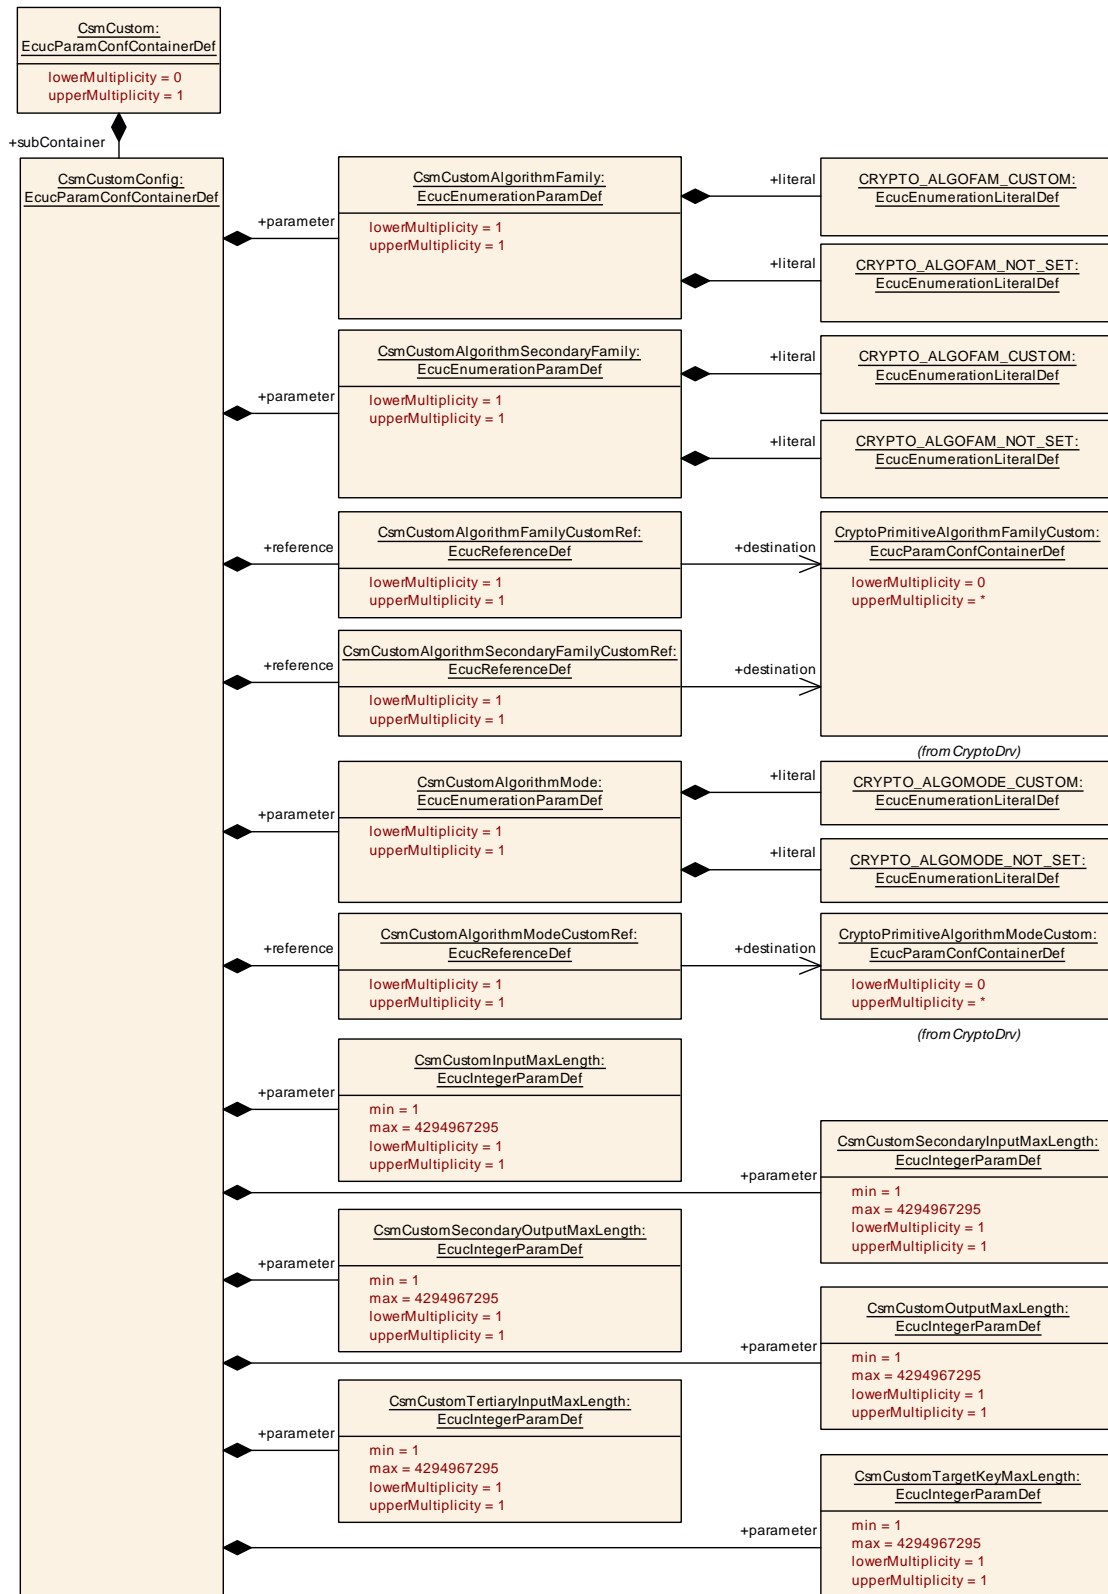

**Figure 10.29: CsmCustom Layout**

**[ECUC\_Csm\_00342] Definition of EcucParamConfContainerDef CsmCustom** [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmCustom   |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>                                 |
| <b>Description</b>              | Container for configuration of a CSM custom crypto primitive. |
| <b>Configuration Parameters</b> |   |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers             |              |   |
|---------------------------------|--------------|---|
| Container Name                  | Multiplicity | Scope / Dependency  |
| <a href="#">CsmCustomConfig</a> | 1            | Container for custom primitive configuration configuration parameters |

]

### 10.2.34 CsmCustomConfig

**[ECUC\_Csm\_00343] Definition of EcucParamConfContainerDef CsmCustom Config** [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmCustomConfig   |
| <b>Parent Container</b>         | <a href="#">CsmCustom</a>   |
| <b>Description</b>              | Container for custom primitive configuration configuration parameters |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmCustomAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00344] |
| <a href="#">CsmCustomAlgorithmMode</a>                     | 1            | [ECUC_Csm_00346] |
| <a href="#">CsmCustomAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00348] |
| <a href="#">CsmCustomInputMaxLength</a>                    | 1            | [ECUC_Csm_00350] |
| <a href="#">CsmCustomOutputMaxLength</a>                   | 1            | [ECUC_Csm_00353] |
| <a href="#">CsmCustomSecondaryInputMaxLength</a>           | 1            | [ECUC_Csm_00351] |
| <a href="#">CsmCustomSecondaryOutputMaxLength</a>          | 1            | [ECUC_Csm_00354] |
| <a href="#">CsmCustomTargetKeyMaxLength</a>                | 1            | [ECUC_Csm_00355] |
| <a href="#">CsmCustomTertiaryInputMaxLength</a>            | 1            | [ECUC_Csm_00352] |
| <a href="#">CsmCustomAlgorithmFamilyCustomRef</a>          | 1            | [ECUC_Csm_00345] |
| <a href="#">CsmCustomAlgorithmModeCustomRef</a>            | 1            | [ECUC_Csm_00347] |
| <a href="#">CsmCustomAlgorithmSecondaryFamilyCustomRef</a> | 1            | [ECUC_Csm_00349] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00344] Definition of EcucEnumerationParamDef CsmCustomAlgorithmFamily**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomAlgorithmFamily  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>   |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET  | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00346] Definition of EcucEnumerationParamDef CsmCustomAlgorithmMode**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomAlgorithmMode                                    |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>                           |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00348] Definition of EcucEnumerationParamDef CsmCustomAlgorithmSecondaryFamily [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomAlgorithmSecondaryFamily                         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>                           |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM                                     | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET                                    | – |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00350] Definition of EcucIntegerParamDef CsmCustomInputMaxLength [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomInputMaxLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | –  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00353] Definition of EcucIntegerParamDef CsmCustomOutputMaxLength

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomOutputMaxLength  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>   |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

### [ECUC\_Csm\_00351] Definition of EcucIntegerParamDef CsmCustomSecondaryInputMaxLength

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomSecondaryInputMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>  |   |              |
| <b>Description</b>                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucIntegerParamDef  |   |              |
| <b>Range</b>                            | 1 .. 4294967295  |   |              |
| <b>Default value</b>                    | -  |   |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | - |              |
|   | <b>Post-build time</b>   | - |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

**[ECUC\_Csm\_00354] Definition of EcucIntegerParamDef CsmCustomSecondaryOutputMaxLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomSecondaryOutputMaxLength   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>   |   |              |
| <b>Description</b>                      | Size of the result data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | EcucIntegerParamDef   |   |              |
| <b>Range</b>                            | 1 .. 4294967295   |   |              |
| <b>Default value</b>                    | -   |   |              |
| <b>Post-Build Variant Value</b>         | false   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | - |              |
|   | <b>Post-build time</b>  | - |              |
| <b>Scope / Dependency</b>               | scope: local  |   |              |

]

**[ECUC\_Csm\_00355] Definition of EcucIntegerParamDef CsmCustomTargetKeyMaxLength**

|   |                                 |   |              |
|---|---------------------------------|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomTargetKeyMaxLength     |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a> |   |              |
| <b>Description</b>                      | Size of the Key in bytes        |   |              |
| <b>Multiplicity</b>                     | 1                               |   |              |
| <b>Type</b>                             | EcucIntegerParamDef             |   |              |
| <b>Range</b>                            | 1 .. 4294967295                 |   |              |
| <b>Default value</b>                    | -                               |   |              |
| <b>Post-Build Variant Value</b>         | false                           |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>         | X | All Variants |
|   | <b>Link time</b>                | - |              |
|   | <b>Post-build time</b>          | - |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>         | X | All Variants |
|   | <b>Link time</b>                | - |              |
|   | <b>Post-build time</b>          | - |              |
| <b>Scope / Dependency</b>               | scope: local                    |   |              |

]



### [ECUC\_Csm\_00352] Definition of EcucIntegerParamDef CsmCustomTertiaryInputMaxLength

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| Parameter Name                   | CsmCustomTertiaryInputMaxLength  |   |              |
| Parent Container                 | <a href="#">CsmCustomConfig</a>  |   |              |
| Description                      | Size of the input data buffer for the synchronous RTE service interface if this primitive is referenced by a Csm job. It may also be possible that other BSW modules use the length parameter for buffer size calculation. |   |              |
| Multiplicity                     | 1  |   |              |
| Type                             | EcucIntegerParamDef  |   |              |
| Range                            | 1 .. 4294967295  |   |              |
| Default value                    | -  |   |              |
| Post-Build Variant Value         | false  |   |              |
| Multiplicity Configuration Class | Pre-compile time   | X | All Variants |
|                                  | Link time  | - |              |
|                                  | Post-build time  | - |              |
| Value Configuration Class        | Pre-compile time   | X | All Variants |
|                                  | Link time  | - |              |
|                                  | Post-build time  | - |              |
| Scope / Dependency               | scope: local   |   |              |

]

### [ECUC\_Csm\_00345] Definition of EcucReferenceDef CsmCustomAlgorithmFamilyCustomRef

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| Parameter Name                   | CsmCustomAlgorithmFamilyCustomRef                                  |   |              |
| Parent Container                 | <a href="#">CsmCustomConfig</a>                                    |   |              |
| Description                      | Reference to a customer specific algorithm family custom container |   |              |
| Multiplicity                     | 1  |   |              |
| Type                             | Reference to CryptoPrimitiveAlgorithmFamilyCustom                  |   |              |
| Multiplicity Configuration Class | Pre-compile time   | X | All Variants |
|                                  | Link time  | - |              |
|                                  | Post-build time  | - |              |
| Value Configuration Class        | Pre-compile time   | X | All Variants |
|                                  | Link time  | - |              |
|                                  | Post-build time  | - |              |
| Scope / Dependency               | scope: local   |   |              |

]

### [ECUC\_Csm\_00347] Definition of EcucReferenceDef CsmCustomAlgorithmModeCustomRef

|                  |  |  |  |
|------------------|--|--|--|
| Parameter Name   | CsmCustomAlgorithmModeCustomRef                                  |  |  |
| Parent Container | <a href="#">CsmCustomConfig</a>                                  |  |  |
| Description      | Reference to a customer specific algorithm mode custom container |  |  |

▽

△

|   |   |   |              |
|---|---|---|--------------|
| <b>Multiplicity</b>                     | 1   |   |              |
| <b>Type</b>                             | Reference to CryptoPrimitiveAlgorithmModeCustom |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                         | X | All Variants |
|   | <b>Link time</b>                                | – |              |
|   | <b>Post-build time</b>                          | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                         | X | All Variants |
|   | <b>Link time</b>                                | – |              |
|   | <b>Post-build time</b>                          | – |              |
| <b>Scope / Dependency</b>               | scope: local                                    |   |              |

]

**[ECUC\_Csm\_00349] Definition of EcucReferenceDef CsmCustomAlgorithmSecondaryFamilyCustomRef** [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmCustomAlgorithmSecondaryFamilyCustomRef                                       |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmCustomConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | Reference to CryptoPrimitiveAlgorithmFamilyCustom                                |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### 10.2.35 CsmJobKeySetValid

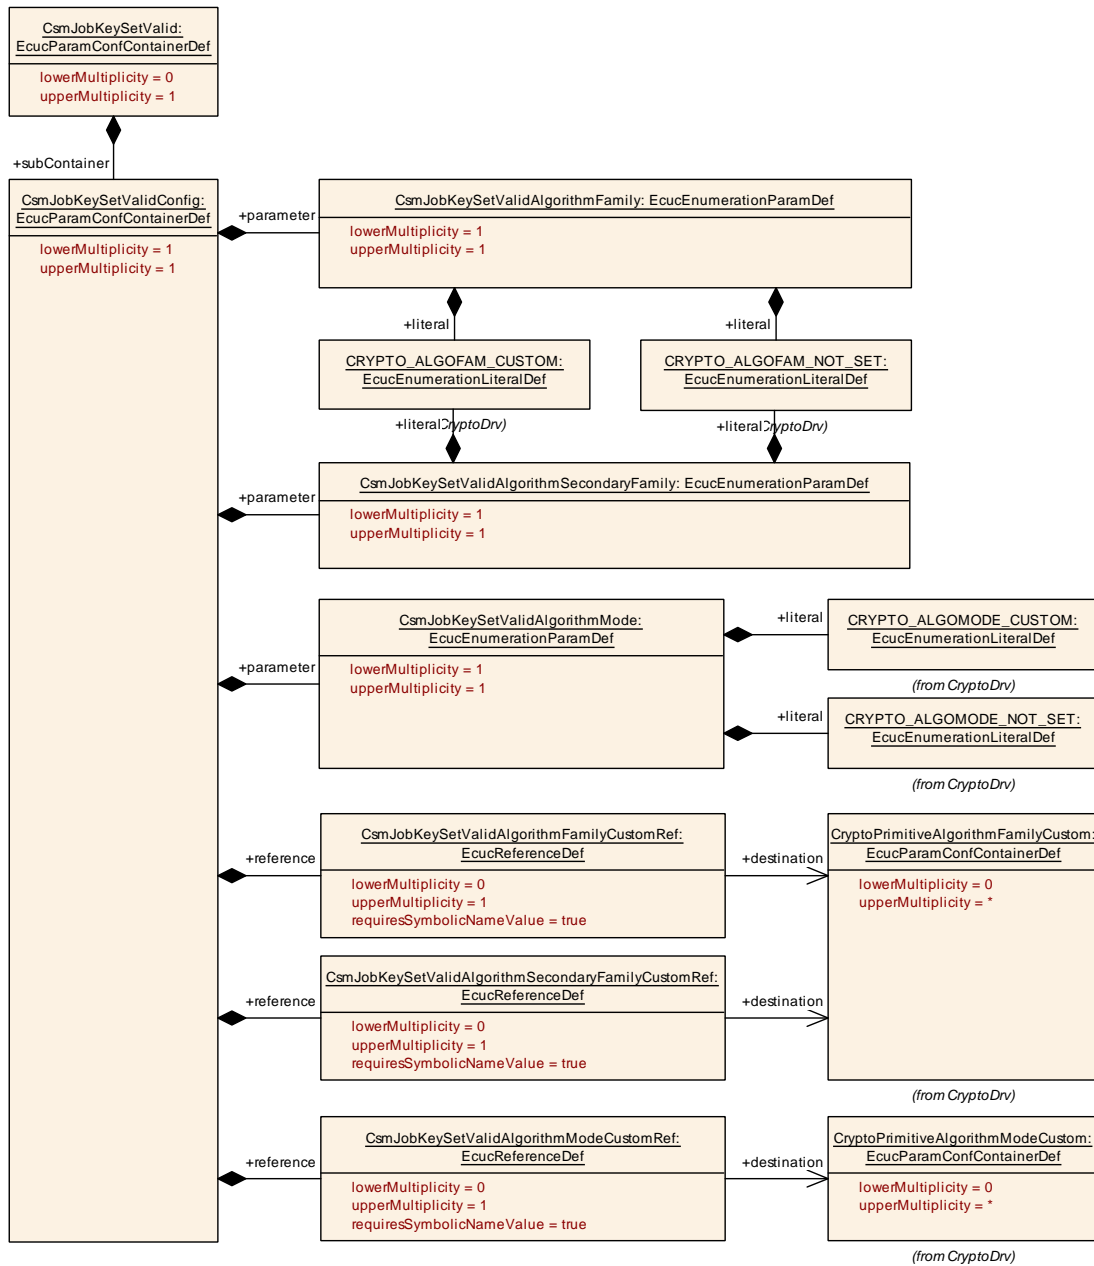


Figure 10.30: CsmJobKeySetValid Layout

### [ECUC\_Csm\_00196] Definition of EcucParamConfContainerDef CsmJobKeySet Valid

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeySetValid                        |
| <b>Parent Container</b>         | CsmPrimitives                            |
| <b>Description</b>              | Configurations of KeySetValid primitives |
| <b>Configuration Parameters</b> |  |

| No Included Parameters                  |              |   |
|---|--------------|---|
| Included Containers                     |              |   |
| Container Name                          | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeySetValidConfig</a> | 1            | Container for configuration of a CSM key set valid operation. The container name serves as a symbolic name for the identifier of a key configuration. |

]

### 10.2.36 CsmJobKeySetValidConfig

#### [ECUC\_Csm\_00204] Definition of EcucParamConfContainerDef CsmJobKeySetValidConfig [

| <b>Container Name</b>    | CsmJobKeySetValidConfig   |
|--------------------------|---|
| <b>Parent Container</b>  | <a href="#">CsmJobKeySetValid</a>   |
| <b>Description</b>       | Container for configuration of a CSM key set valid operation. The container name serves as a symbolic name for the identifier of a key configuration. |
| Configuration Parameters |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeySetValidAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00328] |
| <a href="#">CsmJobKeySetValidAlgorithmMode</a>                     | 1            | [ECUC_Csm_00329] |
| <a href="#">CsmJobKeySetValidAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00340] |
| <a href="#">CsmJobKeySetValidAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00330] |
| <a href="#">CsmJobKeySetValidAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00331] |
| <a href="#">CsmJobKeySetValidAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00332] |

| No Included Containers |
|------------------------|
|------------------------|

]

#### [ECUC\_Csm\_00328] Definition of EcucEnumerationParamDef CsmJobKeySetValidAlgorithmFamily [

|                         |   |
|-------------------------|---|
| <b>Parameter Name</b>   | CsmJobKeySetValidAlgorithmFamily  |
| <b>Parent Container</b> | <a href="#">CsmJobKeySetValidConfig</a>   |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |
| <b>Multiplicity</b>     | 1   |
| <b>Type</b>             | EcucEnumerationParamDef   |





|   |                         |   |              |
|---|-------------------------|---|--------------|
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET  | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local            |   |              |

]

### [ECUC\_Csm\_00329] Definition of EcucEnumerationParamDef CsmJobKeySetValidAlgorithmMode [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetValidAlgorithmMode                             |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetValidConfig</a>                    |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                    |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                                     | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                    | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                    | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                     | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                    | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                     | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00340] Definition of EcucEnumerationParamDef CsmJobKeySetValidAlgorithmSecondaryFamily [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetValidAlgorithmSecondaryFamily                              |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetValidConfig</a>                                |   |              |
| <b>Description</b>                      | Determines the secondary algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef  |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET   | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |



△

|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
|                                  | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

]

### [ECUC\_Csm\_00330] Definition of EcucReferenceDef CsmJobKeySetValidAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetValidAlgorithmFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetValidConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeySetValidAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00331] Definition of EcucReferenceDef CsmJobKeySetValidAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetValidAlgorithmModeCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetValidConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeySetValidAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

**[ECUC\_Csm\_00332] Definition of EcucReferenceDef CsmJobKeySetValidAlgorithmSecondaryFamilyCustomRef [**

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetValidAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetValidConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeySetValidSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.37 CsmJobKeySetInvalid**

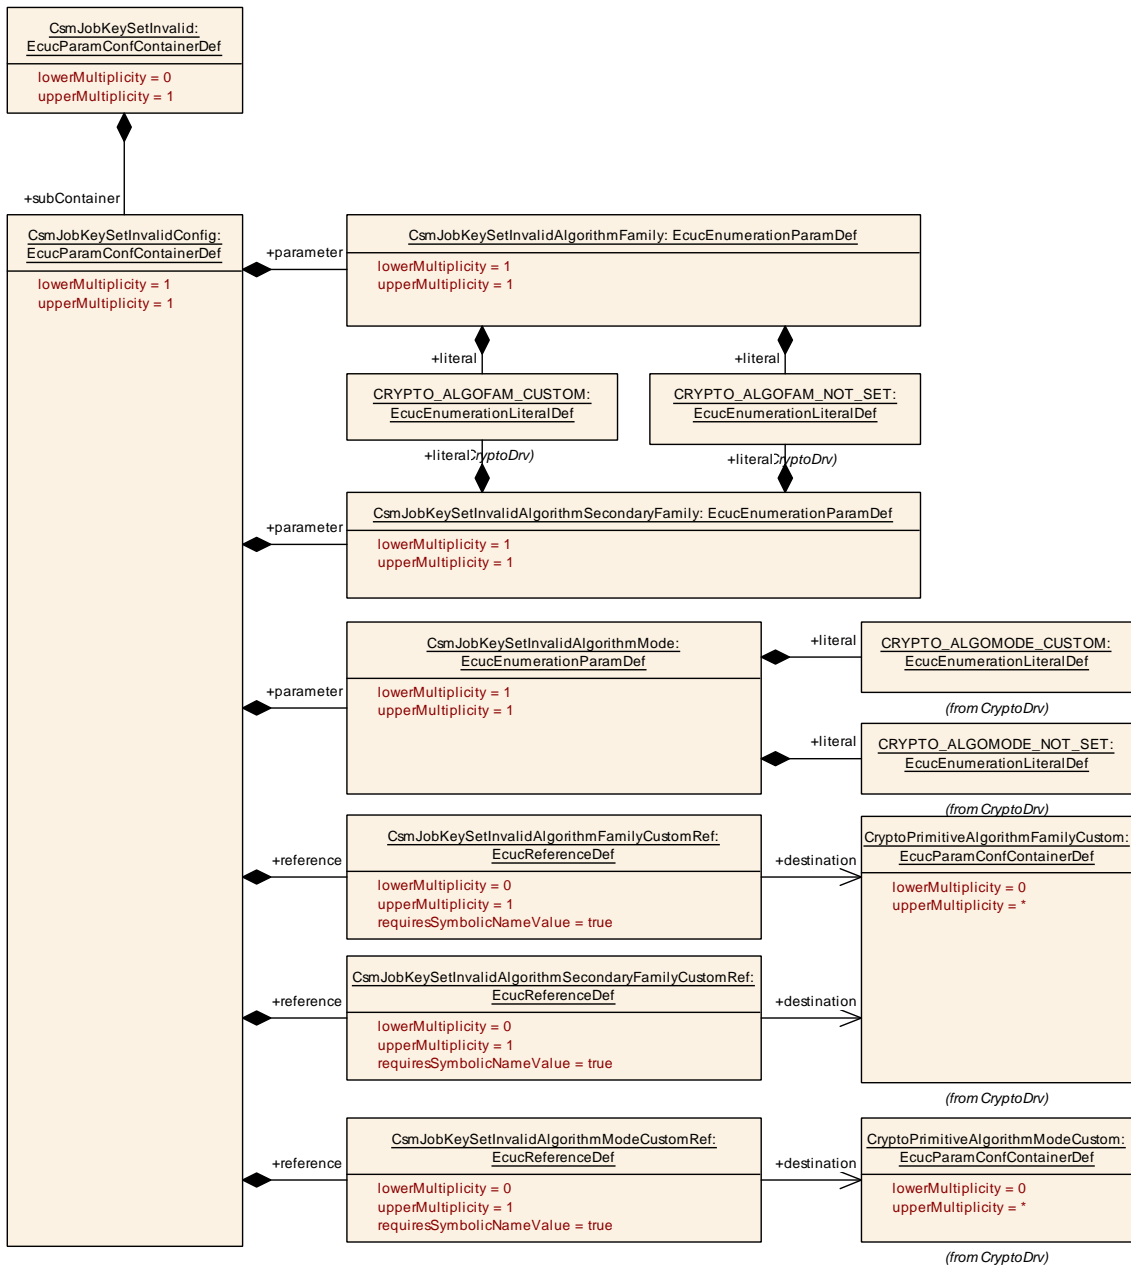

**Figure 10.31: CsmJobKeySetInvalid Layout**

**[ECUC\_Csm\_00333] Definition of EcucParamConfContainerDef CsmJobKeySet Invalid**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeySetInvalid                        |
| <b>Parent Container</b>         | CsmPrimitives                              |
| <b>Description</b>              | Configurations of KeySetInvalid primitives |
| <b>Configuration Parameters</b> |  |



| No Included Parameters                    |              |   |
|---|--------------|---|
|   |              |   |
| Included Containers                       |              |   |
| Container Name                            | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeySetInvalidConfig</a> | 1            | Container for configuration of a CSM key set invalid operation. |

]

### 10.2.38 CsmJobKeySetInvalidConfig

#### [ECUC\_Csm\_00334] Definition of EcucParamConfContainerDef CsmJobKeySetInvalidConfig [

| Container Name           | CsmJobKeySetInvalidConfig                                       |
|--------------------------|---|
| Parent Container         | <a href="#">CsmJobKeySetInvalid</a>                             |
| Description              | Container for configuration of a CSM key set invalid operation. |
| Configuration Parameters |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeySetInvalidAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00335] |
| <a href="#">CsmJobKeySetInvalidAlgorithmMode</a>                     | 1            | [ECUC_Csm_00336] |
| <a href="#">CsmJobKeySetInvalidAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00341] |
| <a href="#">CsmJobKeySetInvalidAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00337] |
| <a href="#">CsmJobKeySetInvalidAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00339] |
| <a href="#">CsmJobKeySetInvalidAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00338] |

| No Included Containers |
|------------------------|
|                        |

]

#### [ECUC\_Csm\_00335] Definition of EcucEnumerationParamDef CsmJobKeySetInvalidAlgorithmFamily [

|                  |   |   |
|------------------|---|---|
| Parameter Name   | CsmJobKeySetInvalidAlgorithmFamily  |   |
| Parent Container | <a href="#">CsmJobKeySetInvalidConfig</a>   |   |
| Description      | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |
| Multiplicity     | 1   |   |
| Type             | EcucEnumerationParamDef   |   |
| Range            | CRYPTO_ALGOFAM_CUSTOM   | – |
|                  | CRYPTO_ALGOFAM_NOT_SET  | – |





|   |                         |   |              |
|---|-------------------------|---|--------------|
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b> | X | All Variants |
|   | <b>Link time</b>        | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local            |   |              |

]

### [ECUC\_Csm\_00336] Definition of EcucEnumerationParamDef CsmJobKeySetInvalidAlgorithmMode [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetInvalidAlgorithmMode                           |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetInvalidConfig</a>                  |   |              |
| <b>Description</b>                      | Determines the algorithm mode used for the crypto service. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                    |   |              |
| <b>Range</b>                            | CRYPTO_ALGOMODE_CUSTOM                                     | – |              |
|   | CRYPTO_ALGOMODE_NOT_SET                                    | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                    | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                     | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                    | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                     | – |              |
| <b>Scope / Dependency</b>               | scope: local   |   |              |

]

### [ECUC\_Csm\_00341] Definition of EcucEnumerationParamDef CsmJobKeySetInvalidAlgorithmSecondaryFamily [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetInvalidAlgorithmSecondaryFamily                            |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetInvalidConfig</a>                              |   |              |
| <b>Description</b>                      | Determines the secondary algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef  |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|   | CRYPTO_ALGOFAM_NOT_SET   | – |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |



△

|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | – |  |
|                           | <b>Post-build time</b> | – |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

]

### [ECUC\_Csm\_00337] Definition of EcucReferenceDef CsmJobKeySetInvalidAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetInvalidAlgorithmFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetInvalidConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeySetInvalidAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00339] Definition of EcucReferenceDef CsmJobKeySetInvalidAlgorithmModeCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetInvalidAlgorithmModeCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetInvalidConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeySetInvalidAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

**[ECUC\_Csm\_00338] Definition of EcucReferenceDef CsmJobKeySetInvalidAlgorithmSecondaryFamilyCustomRef [**


|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeySetInvalidAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeySetInvalidConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmJobKeySetInvalidAlgorithmSecondaryFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]


**10.2.39 CsmJobRandomSeed**

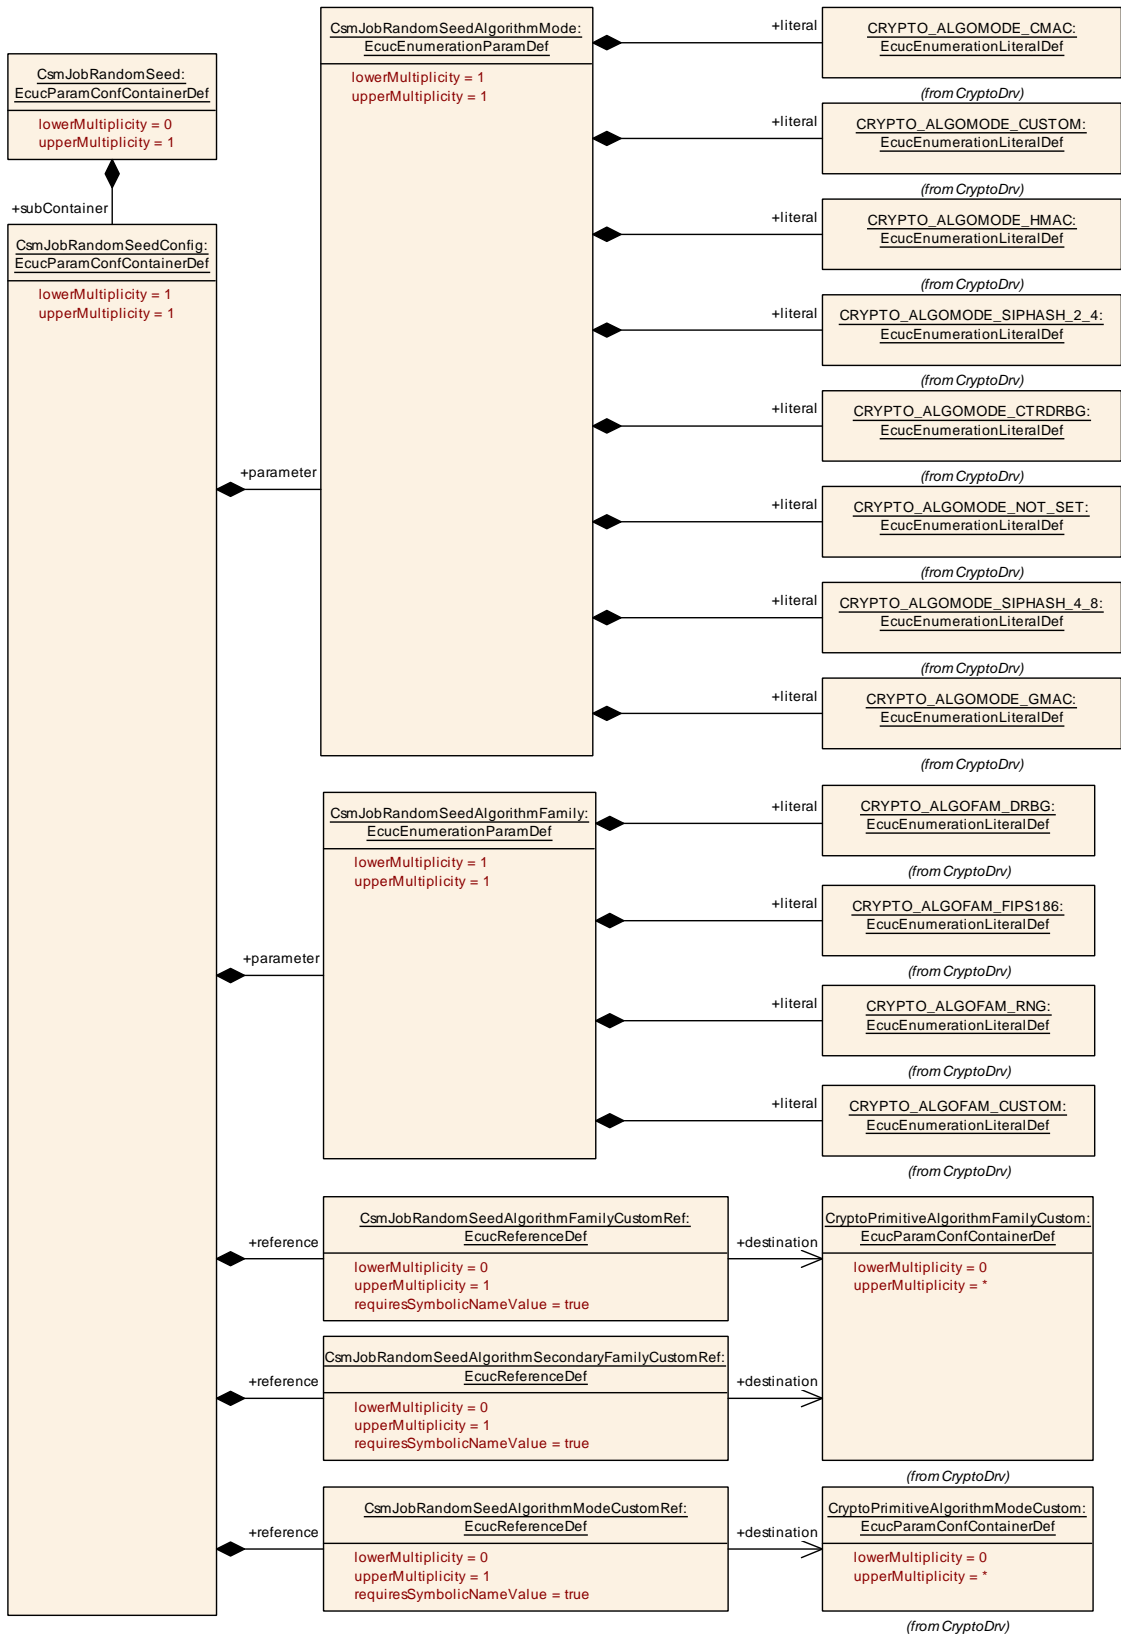

**Figure 10.32: CsmJobRandomSeed Layout**

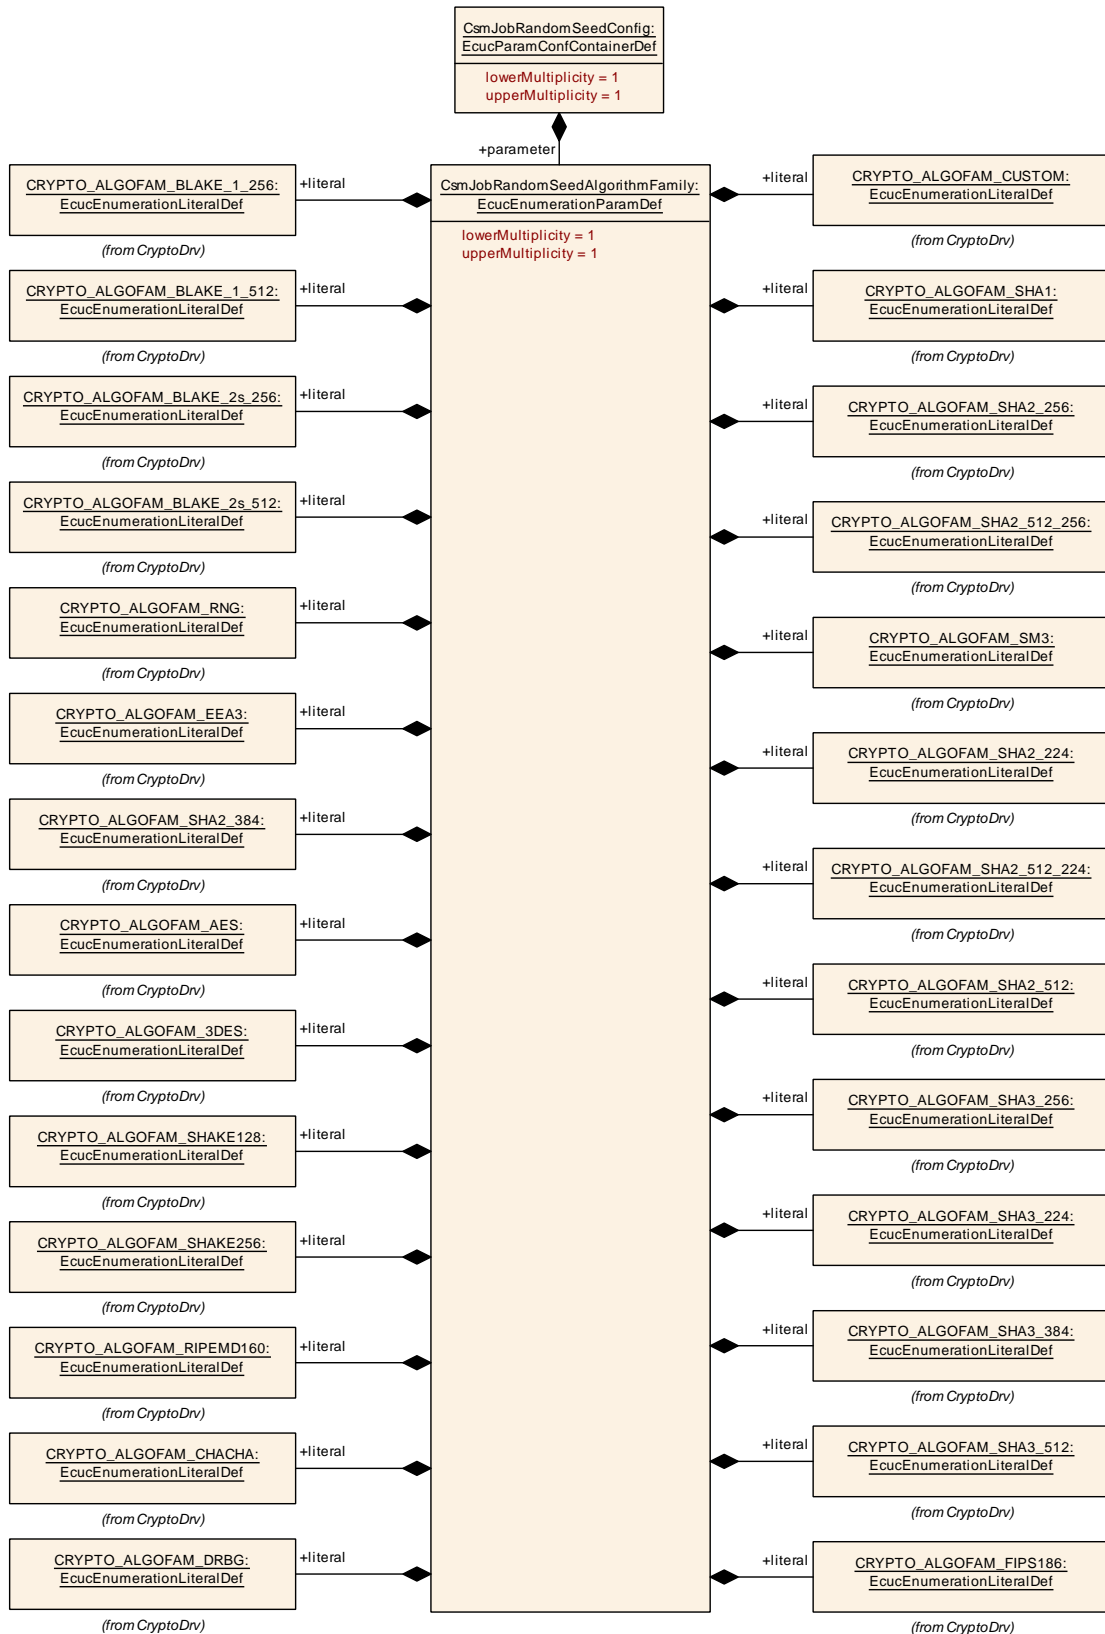

**Figure 10.33: CsmJobRandomSeedAlgorithmFamily Layout**

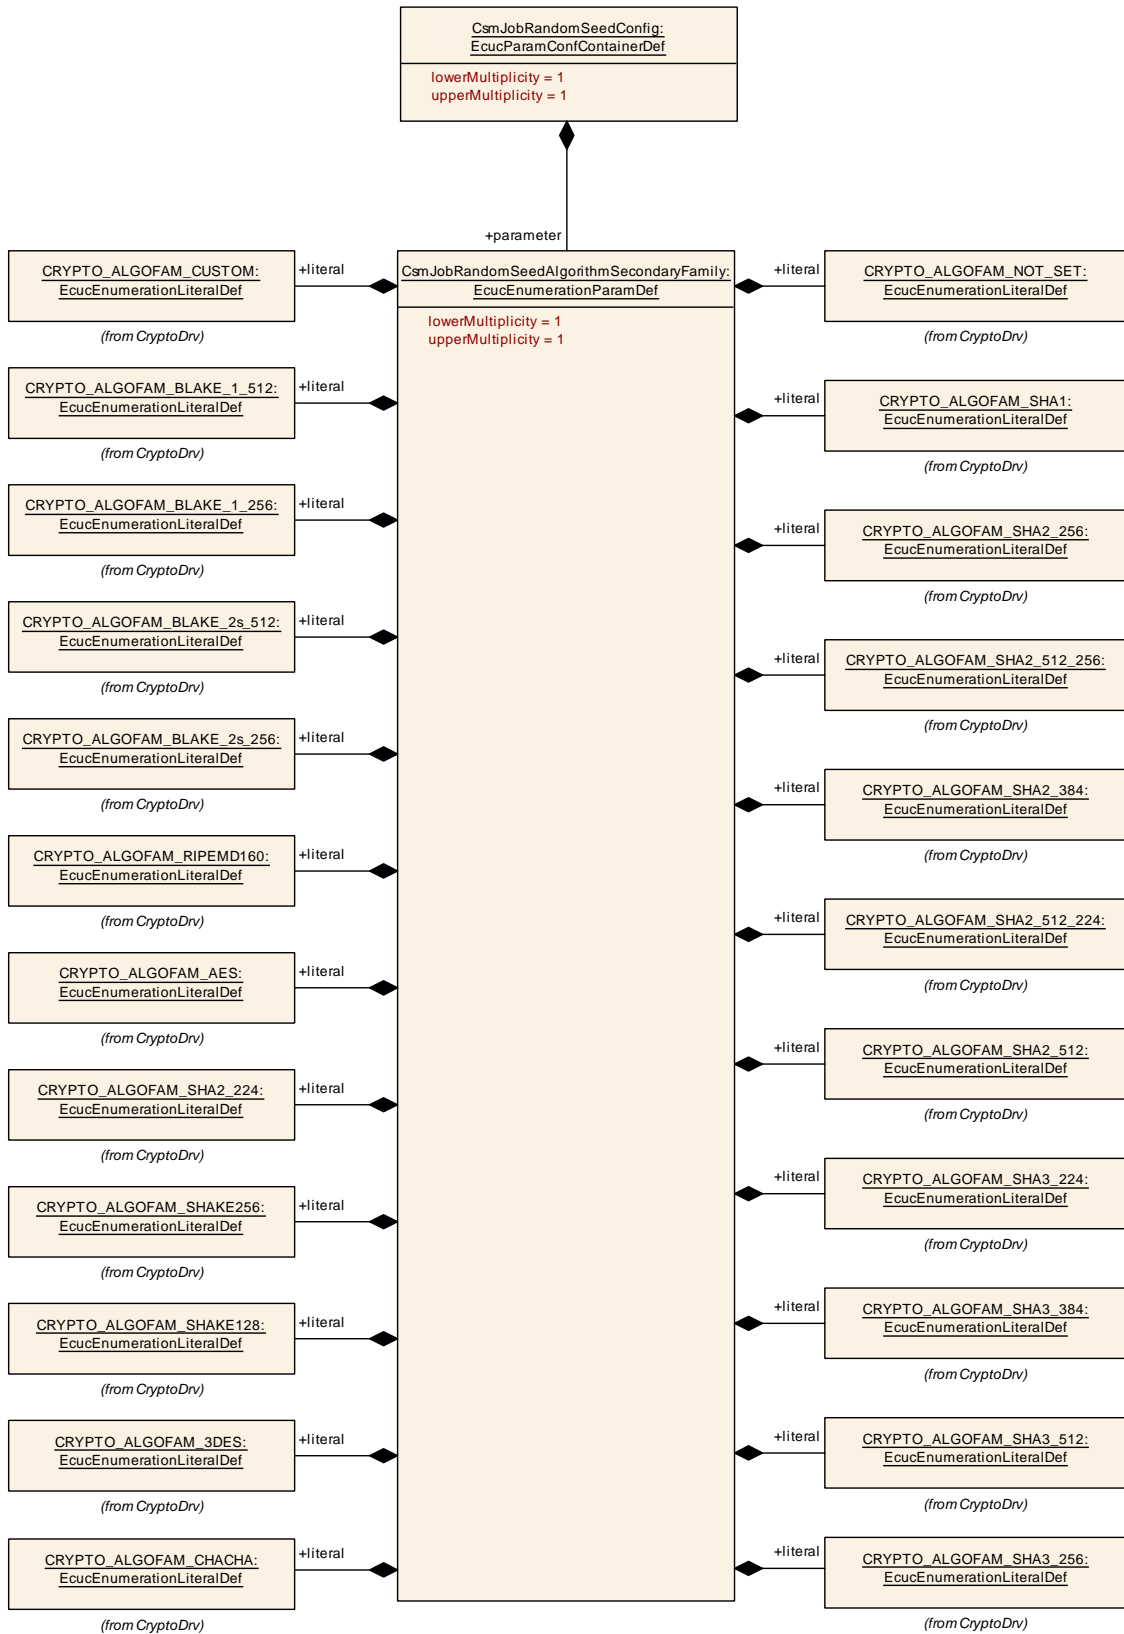

**Figure 10.34: CsmJobRandomSeedAlgorithmSecondaryFamily Layout**

### [ECUC\_Csm\_00197] Definition of EcucParamConfContainerDef CsmJobRandomSeed

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobRandomSeed                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>           |
| <b>Description</b>              | Configurations of RandomSeed primitives |
| <b>Configuration Parameters</b> |   |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                    |              |   |
|--|--------------|---|
| Container Name                         | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobRandomSeedConfig</a> | 1            | Container for configuration of a CSM Random Seed operation. The container name serves as a symbolic name for the identifier of a random seed configuration. |

]

#### 10.2.40 CsmJobRandomSeedConfig

### [ECUC\_Csm\_00261] Definition of EcucParamConfContainerDef CsmJobRandomSeedConfig

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobRandomSeedConfig  |
| <b>Parent Container</b>         | <a href="#">CsmJobRandomSeed</a>  |
| <b>Description</b>              | Container for configuration of a CSM random seed operation. The container name serves as a symbolic name for the identifier of a random seed configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmJobRandomSeedAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00206] |
| <a href="#">CsmJobRandomSeedAlgorithmMode</a>                     | 1            | [ECUC_Csm_00208] |
| <a href="#">CsmJobRandomSeedAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00210] |
| <a href="#">CsmJobRandomSeedAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00312] |
| <a href="#">CsmJobRandomSeedAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00313] |
| <a href="#">CsmJobRandomSeedAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00314] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]



**[ECUC\_Csm\_00206] Definition of EcucEnumerationParamDef CsmJobRandomSeedAlgorithmFamily** [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobRandomSeedAlgorithmFamily                              |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobRandomSeedConfig</a>                       |   |              |
| <b>Description</b>                      | Determines the algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>                     | 1  |   |              |
| <b>Type</b>                             | EcucEnumerationParamDef                                      |   |              |
| <b>Range</b>                            | CRYPTO_ALGOFAM_3DES  | – |              |
|   | CRYPTO_ALGOFAM_AES   | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_256                                   | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_1_512                                   | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_256                                  | – |              |
|   | CRYPTO_ALGOFAM_BLAKE_2s_512                                  | – |              |
|   | CRYPTO_ALGOFAM_CHACHA  | – |              |
|   | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|   | CRYPTO_ALGOFAM_DRBG  | – |              |
|   | CRYPTO_ALGOFAM_EEA3  | – |              |
|   | CRYPTO_ALGOFAM_FIPS186                                       | – |              |
|   | CRYPTO_ALGOFAM_RIPEMD160                                     | – |              |
|   | CRYPTO_ALGOFAM_RNG   | – |              |
|   | CRYPTO_ALGOFAM_SHA1  | – |              |
|   | CRYPTO_ALGOFAM_SHA2_224                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA2_256                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA2_384                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_224                                  | – |              |
|   | CRYPTO_ALGOFAM_SHA2_512_256                                  | – |              |
|   | CRYPTO_ALGOFAM_SHA3_224                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA3_256                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA3_384                                      | – |              |
|   | CRYPTO_ALGOFAM_SHA3_512                                      | – |              |
|   | CRYPTO_ALGOFAM_SHAKE128                                      | – |              |
|   | CRYPTO_ALGOFAM_SHAKE256                                      | – |              |
|   | CRYPTO_ALGOFAM_SM3   | – |              |
| <b>Post-Build Variant Value</b>         | false  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                       | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                                      | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>                                       | – |              |





|                           |              |
|---------------------------|--------------|
| <b>Scope / Dependency</b> | scope: local |
|---------------------------|--------------|

]

### [ECUC\_Csm\_00208] Definition of EcucEnumerationParamDef CsmJobRandomSeedAlgorithmMode [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobRandomSeedAlgorithmMode                             |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobRandomSeedConfig</a>                    |   |              |
| <b>Description</b>               | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_CMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_CTRDRBG                                   | – |              |
|                                  | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOMODE_GMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_HMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
|                                  | CRYPTO_ALGOMODE_SIPHASH_2_4                               | – |              |
|                                  | CRYPTO_ALGOMODE_SIPHASH_4_8                               | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00210] Definition of EcucEnumerationParamDef CsmJobRandomSeedAlgorithmSecondaryFamily [

|                         |  |   |  |
|-------------------------|--|---|--|
| <b>Parameter Name</b>   | CsmJobRandomSeedAlgorithmSecondaryFamily                     |   |  |
| <b>Parent Container</b> | <a href="#">CsmJobRandomSeedConfig</a>                       |   |  |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. |   |  |
| <b>Multiplicity</b>     | 1  |   |  |
| <b>Type</b>             | EcucEnumerationParamDef                                      |   |  |
| <b>Range</b>            | CRYPTO_ALGOFAM_3DES  | – |  |
|                         | CRYPTO_ALGOFAM_AES   | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_1_256                                   | – |  |
|                         | CRYPTO_ALGOFAM_BLAKE_1_512                                   | – |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
|                                  | CRYPTO_ALGOFAM_         |   |              |
|                                  | BLAKE_2s_256            |   | –            |
|                                  | CRYPTO_ALGOFAM_         |   |              |
|                                  | BLAKE_2s_512            |   | –            |
|                                  | CRYPTO_ALGOFAM_CHACHA   |   | –            |
|                                  | CRYPTO_ALGOFAM_CUSTOM   |   | –            |
|                                  | CRYPTO_ALGOFAM_NOT_SET  |   | –            |
|                                  | CRYPTO_ALGOFAM_         |   |              |
|                                  | RIPEMD160               |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA1     |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA2_224 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA2_256 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA2_384 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA2_512 |   | –            |
|                                  | CRYPTO_ALGOFAM_         |   |              |
|                                  | SHA2_512_224            |   | –            |
|                                  | CRYPTO_ALGOFAM_         |   |              |
|                                  | SHA2_512_256            |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA3_224 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA3_256 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA3_384 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHA3_512 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHAKE128 |   | –            |
|                                  | CRYPTO_ALGOFAM_SHAKE256 |   | –            |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |



### [ECUC\_Csm\_00312] Definition of EcucReferenceDef CsmJobRandomSeedAlgorithmFamilyCustomRef

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobRandomSeedAlgorithmFamilyCustomRef                           |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobRandomSeedConfig</a>                             |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |





|                           |   |
|---------------------------|---|
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmJobRandomSeedAlgorithm Family is set to CRYPTO_ALGOFAM_CUSTOM. |
|---------------------------|---|

]

### [ECUC\_Csm\_00313] Definition of EcucReferenceDef CsmJobRandomSeedAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobRandomSeedAlgorithmModeCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobRandomSeedConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter shall only be present if CsmJobRandomSeedAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

### [ECUC\_Csm\_00314] Definition of EcucReferenceDef CsmJobRandomSeedAlgorithmSecondaryFamilyCustomRef [


|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobRandomSeedAlgorithmSecondaryFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobRandomSeedConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This parameter shall only be present if CsmJobRandomSeedSecondary AlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.41 CsmJobKeyDerive**

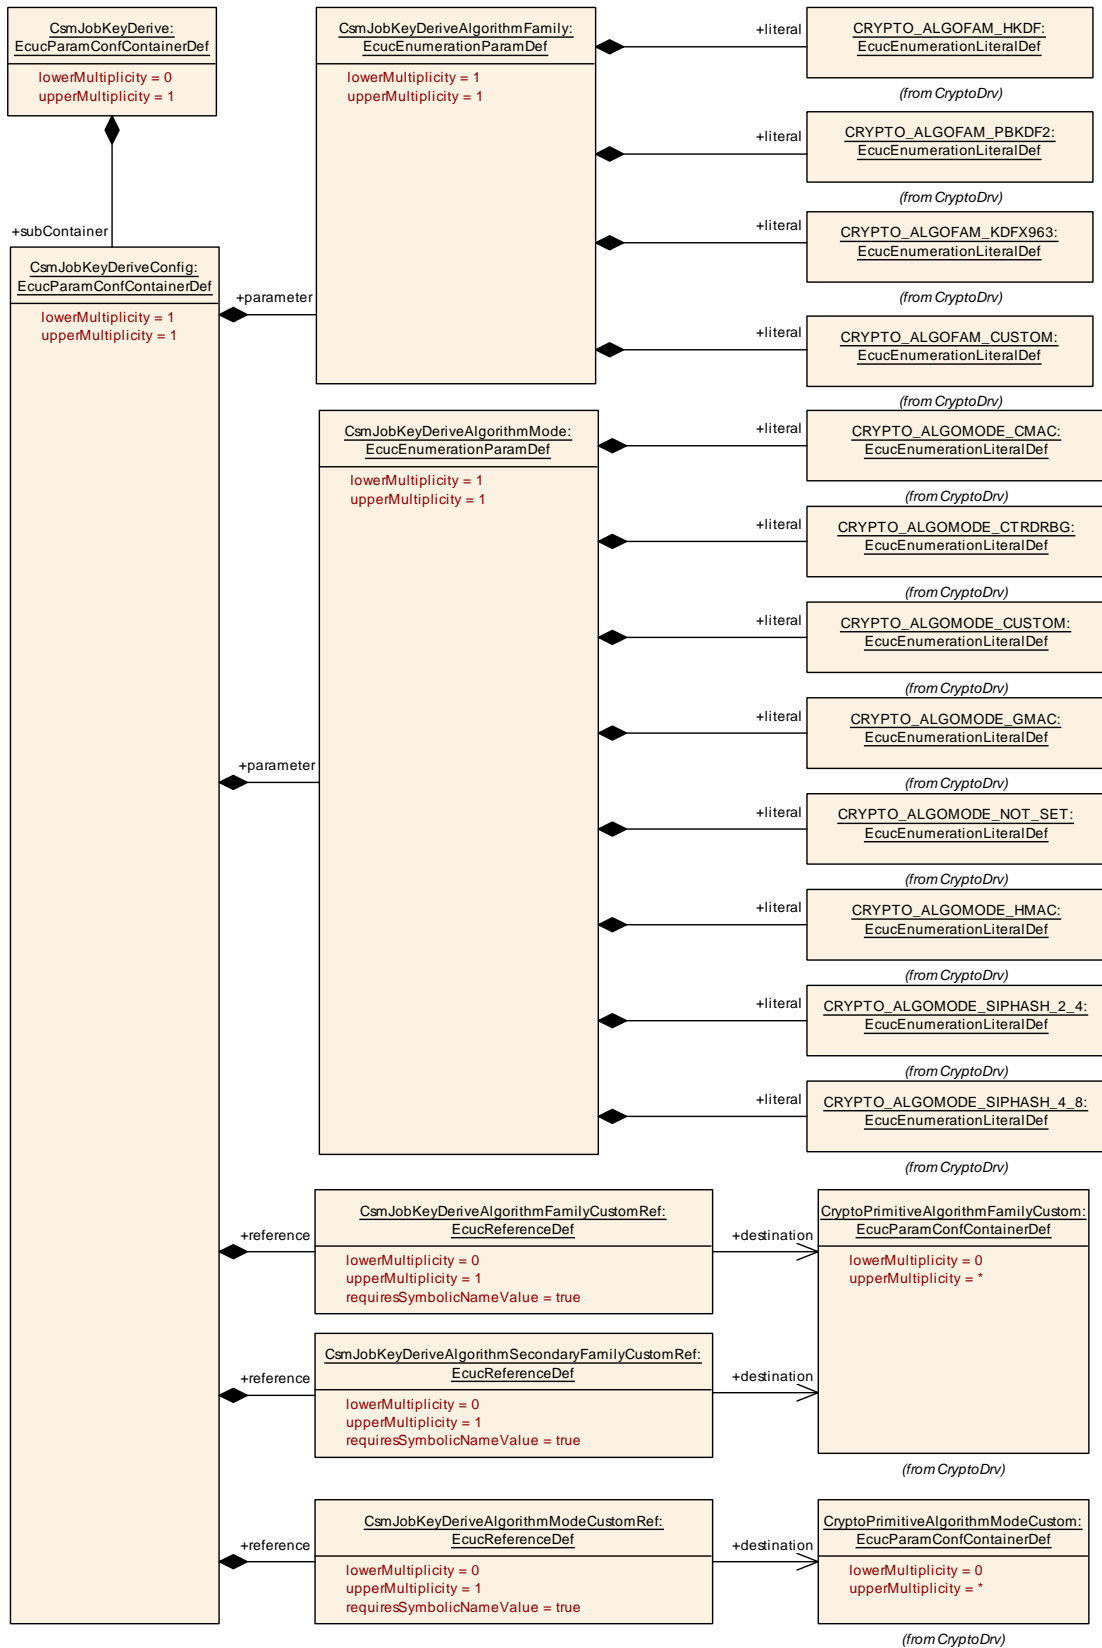

**Figure 10.35: CsmJobKeyDerive Layout**

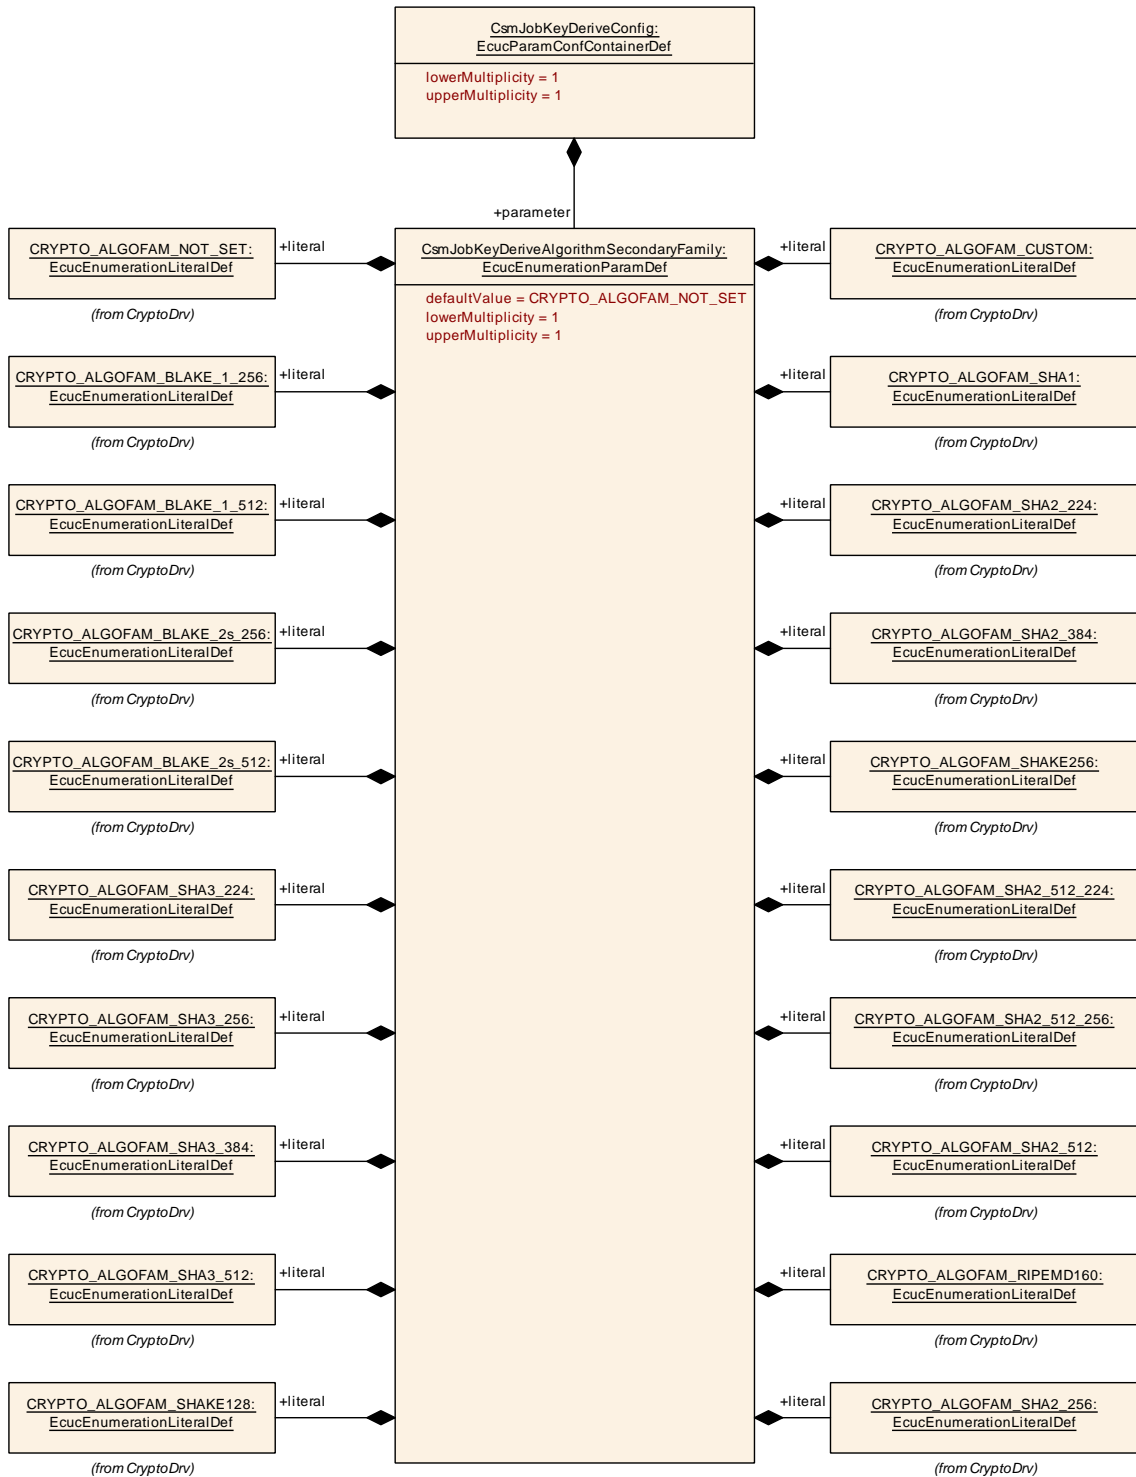

**Figure 10.36: CsmJobKeyDeriveAlgorithmSecondaryFamily Layout**

**[ECUC\_Csm\_00198] Definition of EcucParamConfContainerDef CsmJobKeyDerive**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyDerive                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>          |
| <b>Description</b>              | Configurations of KeyDerive primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                   |              |   |
|---------------------------------------|--------------|---|
| Container Name                        | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeyDeriveConfig</a> | 1            | Container for configuration of a CSM key derive operation. The container name serves as a symbolic name for the identifier of a key derive configuration. |

]

## 10.2.42 CsmJobKeyDeriveConfig

### [ECUC\_Csm\_00213] Definition of EcucParamConfContainerDef CsmJobKeyDeriveConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobKeyDeriveConfig   |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyDerive</a>   |
| <b>Description</b>              | Container for configuration of a CSM key derive operation. The container name serves as a symbolic name for the identifier of a key derive configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeyDeriveAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00215] |
| <a href="#">CsmJobKeyDeriveAlgorithmMode</a>                     | 1            | [ECUC_Csm_00216] |
| <a href="#">CsmJobKeyDeriveAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00218] |
| <a href="#">CsmJobKeyDeriveAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00315] |
| <a href="#">CsmJobKeyDeriveAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00316] |
| <a href="#">CsmJobKeyDeriveAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00317] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00215] Definition of EcucEnumerationParamDef CsmJobKeyDeriveAlgorithmFamily [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyDeriveAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyDeriveConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_HKDF   | – |              |
|                                  | CRYPTO_ALGOFAM_KDFX963  | – |              |
|                                  | CRYPTO_ALGOFAM_PBKDF2   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00216] Definition of EcucEnumerationParamDef CsmJobKeyDeriveAlgorithmMode [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyDeriveAlgorithmMode                              |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyDeriveConfig</a>                     |   |              |
| <b>Description</b>               | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_CMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_CTRDRBG                                   | – |              |
|                                  | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOMODE_GMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_HMAC                                      | – |              |
|                                  | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
|                                  | CRYPTO_ALGOMODE_SIPHASH_2_4                               | – |              |
|                                  | CRYPTO_ALGOMODE_SIPHASH_4_8                               | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]



**[ECUC\_Csm\_00218] Definition of EcucEnumerationParamDef CsmJobKeyDerive AlgorithmSecondaryFamily** [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyDeriveAlgorithmSecondaryFamily                      |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyDeriveConfig</a>                        |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                      |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_BLAKE_1_256                                   | – |              |
|                                  | CRYPTO_ALGOFAM_BLAKE_1_512                                   | – |              |
|                                  | CRYPTO_ALGOFAM_BLAKE_2s_256                                  | – |              |
|                                  | CRYPTO_ALGOFAM_BLAKE_2s_512                                  | – |              |
|                                  | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET                                       | – |              |
|                                  | CRYPTO_ALGOFAM_RIPEMD160                                     | – |              |
|                                  | CRYPTO_ALGOFAM_SHA1  | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_224                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_256                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_384                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_512                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_512_224                                  | – |              |
|                                  | CRYPTO_ALGOFAM_SHA2_512_256                                  | – |              |
|                                  | CRYPTO_ALGOFAM_SHA3_224                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA3_256                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA3_384                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHA3_512                                      | – |              |
|                                  | CRYPTO_ALGOFAM_SHAKE128                                      | – |              |
| CRYPTO_ALGOFAM_SHAKE256          | –  |   |              |
| <b>Default value</b>             | <a href="#">CRYPTO_ALGOFAM_NOT_SET</a>                       |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                       | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

**[ECUC\_Csm\_00315] Definition of EcucReferenceDef CsmJobKeyDeriveAlgorithmFamilyCustomRef** [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyDeriveAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyDeriveConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br><br>dependency: This reference shall only be present if CsmJobKeyDeriveAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00316] Definition of EcucReferenceDef CsmJobKeyDeriveAlgorithmModeCustomRef** [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyDeriveAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyDeriveConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | dependency: This reference shall only be present if CsmJobKeyDeriveAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

**[ECUC\_Csm\_00317] Definition of EcucReferenceDef CsmJobKeyDeriveAlgorithmSecondaryFamilyCustomRef** [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyDeriveAlgorithmSecondaryFamilyCustomRef                                 |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyDeriveConfig</a>  |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm family container in the Crypto Driver |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |
| <b>Type</b>             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom                  |  |  |




△

|   |  |   |              |
|---|--|---|--------------|
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyDeriveSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

└

**10.2.43 CsmJobKeyGenerate**

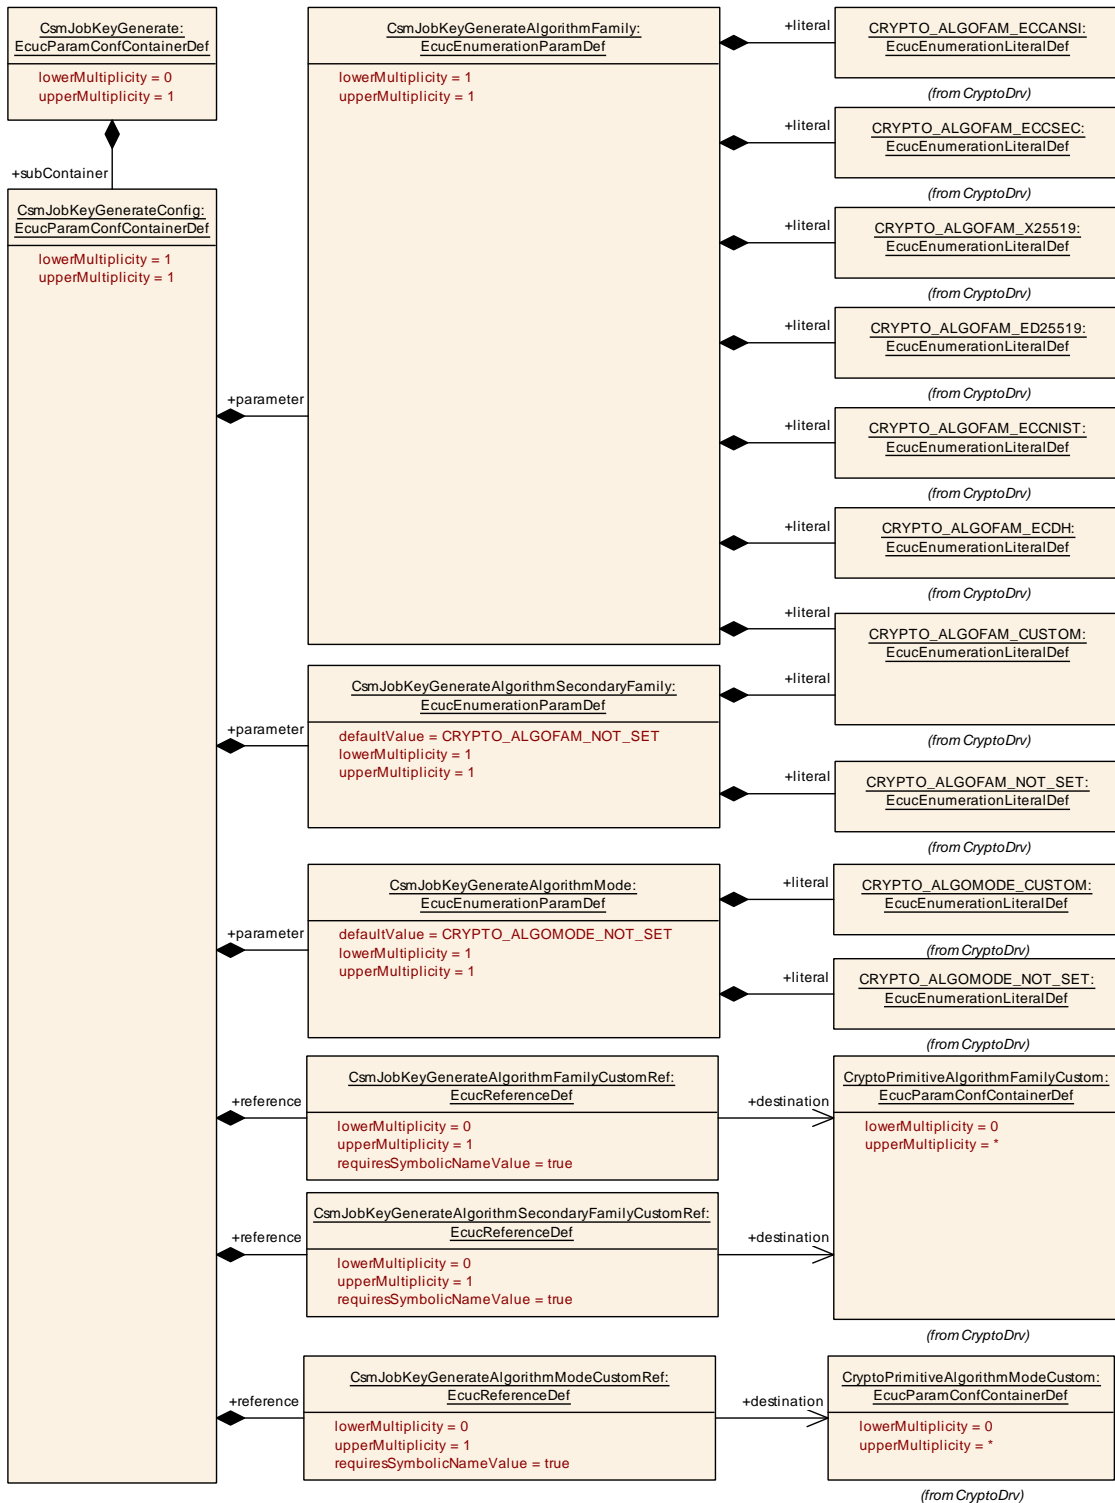

**Figure 10.37: CsmJobKeyGenerate Layout**

**[ECUC\_Csm\_00199] Definition of EcucParamConfContainerDef CsmJobKeyGenerate**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyGenerate                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>            |
| <b>Description</b>              | Configurations of KeyGenerate primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                     |              |   |
|---|--------------|---|
| Container Name                          | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeyGenerateConfig</a> | 1            | Container for configuration of a CSM key generate operation. The container name serves as a symbolic name for the identifier of a key generate configuration. |

]

#### 10.2.44 CsmJobKeyGenerateConfig

##### [ECUC\_Csm\_00220] Definition of EcucParamConfContainerDef CsmJobKeyGenerateConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobKeyGenerateConfig   |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyGenerate</a>   |
| <b>Description</b>              | Container for configuration of a CSM key generate operation. The container name serves as a symbolic name for the identifier of a key generate configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeyGenerateAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00222] |
| <a href="#">CsmJobKeyGenerateAlgorithmMode</a>                     | 1            | [ECUC_Csm_00223] |
| <a href="#">CsmJobKeyGenerateAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00225] |
| <a href="#">CsmJobKeyGenerateAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00318] |
| <a href="#">CsmJobKeyGenerateAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00319] |
| <a href="#">CsmJobKeyGenerateAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00320] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00222] Definition of EcucEnumerationParamDef CsmJobKeyGenerateAlgorithmFamily**

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyGenerateAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyGenerateConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_ECCANSI  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCNIST  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCSEC   | – |              |
|                                  | CRYPTO_ALGOFAM_ECDH   | – |              |
|                                  | CRYPTO_ALGOFAM_ED25519  | – |              |
|                                  | CRYPTO_ALGOFAM_X25519   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

**[ECUC\_Csm\_00223] Definition of EcucEnumerationParamDef CsmJobKeyGenerateAlgorithmMode**

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyGenerateAlgorithmMode                            |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyGenerateConfig</a>                   |   |              |
| <b>Description</b>               | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
| <b>Default value</b>             | <a href="#">CRYPTO_ALGOMODE_NOT_SET</a>                   |   |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00225] Definition of EcucEnumerationParamDef CsmJobKeyGenerateAlgorithmSecondaryFamily [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyGenerateAlgorithmSecondaryFamily                    |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyGenerateConfig</a>                      |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                      |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET                                       | – |              |
| <b>Default value</b>             | <a href="#">CRYPTO_ALGOFAM_NOT_SET</a>                       |   |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                       | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

### [ECUC\_Csm\_00318] Definition of EcucReferenceDef CsmJobKeyGenerateAlgorithmFamilyCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyGenerateAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyGenerateConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyGenerateAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00319] Definition of EcucReferenceDef CsmJobKeyGenerateAlgorithmModeCustomRef [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyGenerateAlgorithmModeCustomRef                          |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyGenerateConfig</a>                          |  |  |
| <b>Description</b>      | Reference to a customer specific algorithm mode custom container |  |  |
| <b>Multiplicity</b>     | 0..1   |  |  |





|   |   |   |              |
|---|---|---|--------------|
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyGenerateAlgorithm Mode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]


### [ECUC\_Csm\_00320] Definition of EcucReferenceDef CsmJobKeyGenerateAlgorithmSecondaryFamilyCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyGenerateAlgorithmSecondaryFamilyCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyGenerateConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyGenerateSecondary AlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]



**10.2.45 CsmJobKeyExchangeCalcPubVal**

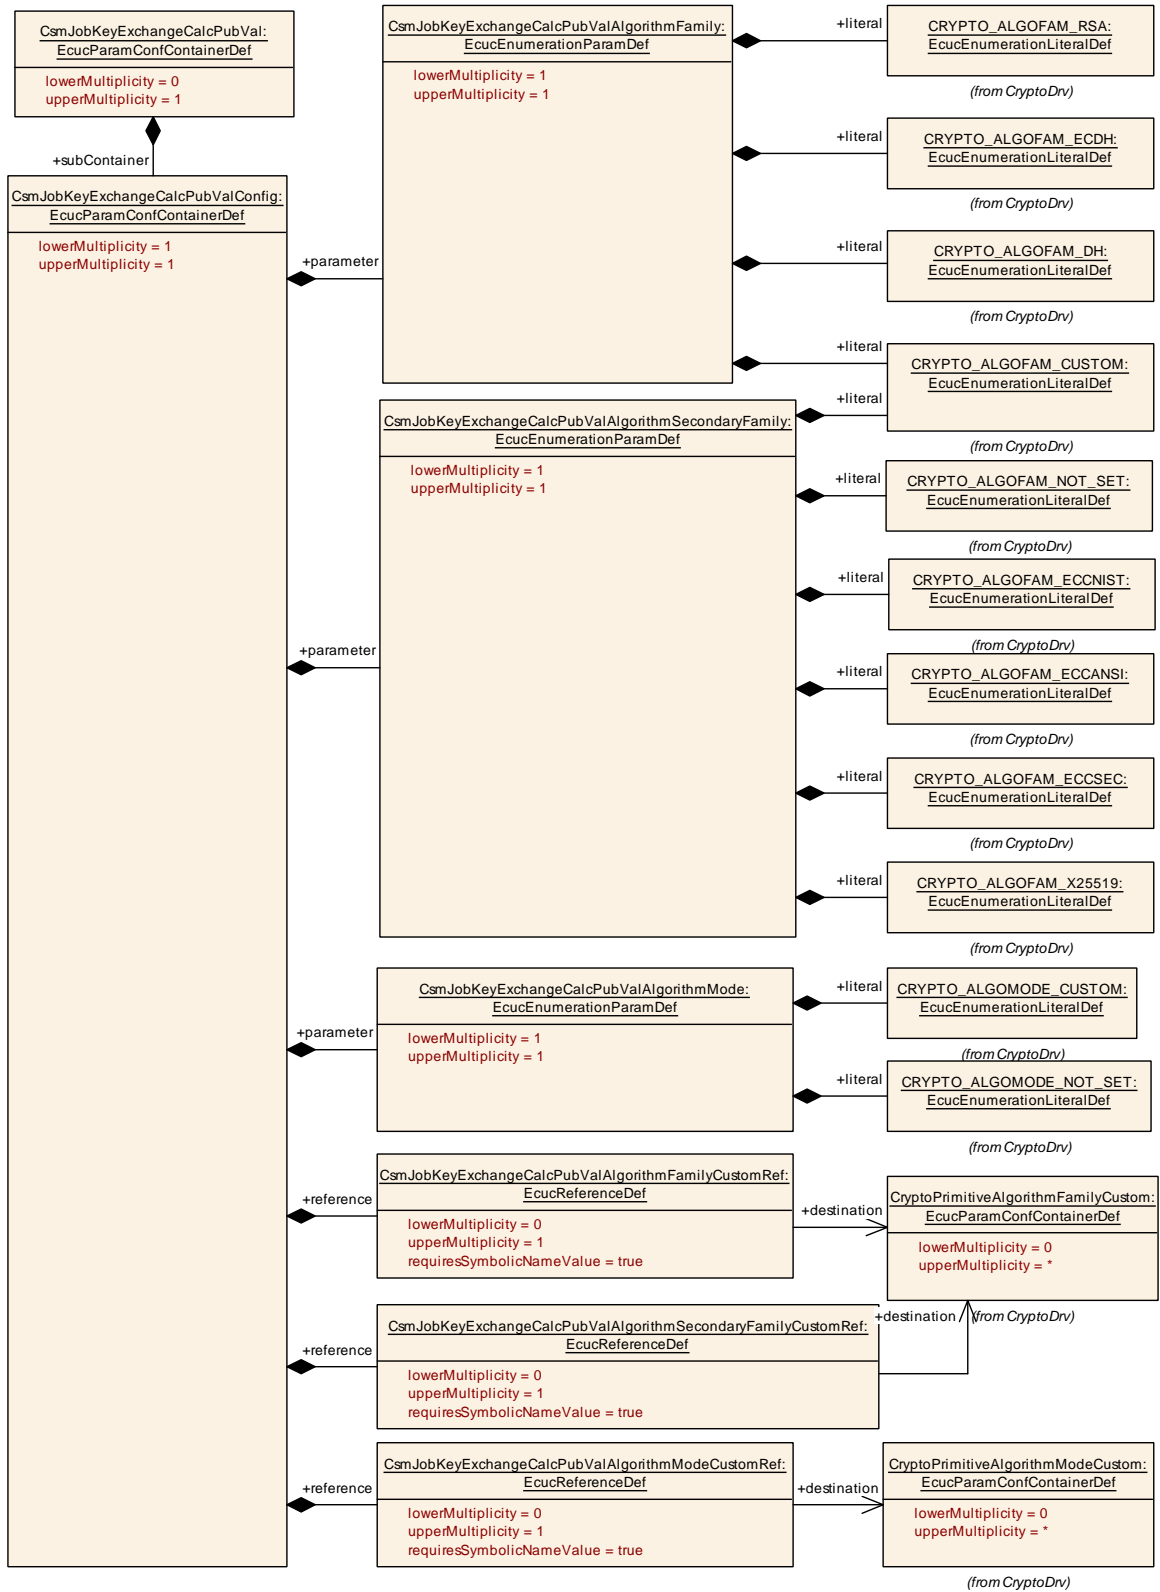

**Figure 10.38: CsmJobKeyExchangeCalcPubVal Layout**

### [ECUC\_Csm\_00200] Definition of EcucParamConfContainerDef CsmJobKeyExchangeCalcPubVal [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyExchangeCalcPubVal                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>                      |
| <b>Description</b>              | Configurations of KeyExchangeCalcPubVal primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                                |              |  |
|--|--------------|--|
| Container Name                                     | Multiplicity | Scope / Dependency   |
| <a href="#">CsmJobKeyExchangeCalcPubVal Config</a> | 1            | Container for configuration of a CSM JobKeyExchangeCalcPubVal. The container name serves as a symbolic name for the identifier of a key configuration. |

]

### 10.2.46 CsmJobKeyExchangeCalcPubValConfig

### [ECUC\_Csm\_00226] Definition of EcucParamConfContainerDef CsmJobKeyExchangeCalcPubValConfig [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyExchangeCalcPubValConfig  |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyExchangeCalcPubVal</a>  |
| <b>Description</b>              | Container for configuration of a CSM JobKeyExchangeCalcPubVal. The container name serves as a symbolic name for the identifier of a key configuration. |
| <b>Configuration Parameters</b> |  |

| Included Parameters  |              |                                  |
|--|--------------|----------------------------------|
| Parameter Name   | Multiplicity | ECUC ID                          |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmFamily</a>                   | 1            | <a href="#">[ECUC_Csm_00227]</a> |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmMode</a>                     | 1            | <a href="#">[ECUC_Csm_00229]</a> |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamily</a>          | 1            | <a href="#">[ECUC_Csm_00231]</a> |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmFamilyCustomRef</a>          | 0..1         | <a href="#">[ECUC_Csm_00321]</a> |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmModeCustomRef</a>            | 0..1         | <a href="#">[ECUC_Csm_00322]</a> |
| <a href="#">CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | <a href="#">[ECUC_Csm_00323]</a> |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00227] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcPubValAlgorithmFamily [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyExchangeCalcPubValAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_DH   | – |              |
|                                  | CRYPTO_ALGOFAM_ECDH   | – |              |
|                                  | CRYPTO_ALGOFAM_RSA  | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00229] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcPubValAlgorithmMode [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyExchangeCalcPubValAlgorithmMode                  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>         |   |              |
| <b>Description</b>               | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00231] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamily [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamily          |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>            |  |  |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. |  |  |





|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Multiplicity</b>              | 1                       |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_ECCANSI  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCNIST  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCSEC   | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET  | – |              |
|                                  | CRYPTO_ALGOFAM_X25519   | – |              |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

]

### [ECUC\_Csm\_00321] Definition of EcucReferenceDef CsmJobKeyExchangeCalcPubValAlgorithmFamilyCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcPubValAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyExchangeCalcPubValAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00322] Definition of EcucReferenceDef CsmJobKeyExchangeCalcPubValAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcPubValAlgorithmModeCustomRef                |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>                |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |



△

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This parameter shall only be present if CsmJobKeyExchangeCalcPubValAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

### [ECUC\_Csm\_00323] Definition of EcucReferenceDef CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcPubValAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcPubValConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyExchangeCalcPubValSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.47 CsmJobKeyExchangeCalcSecret**

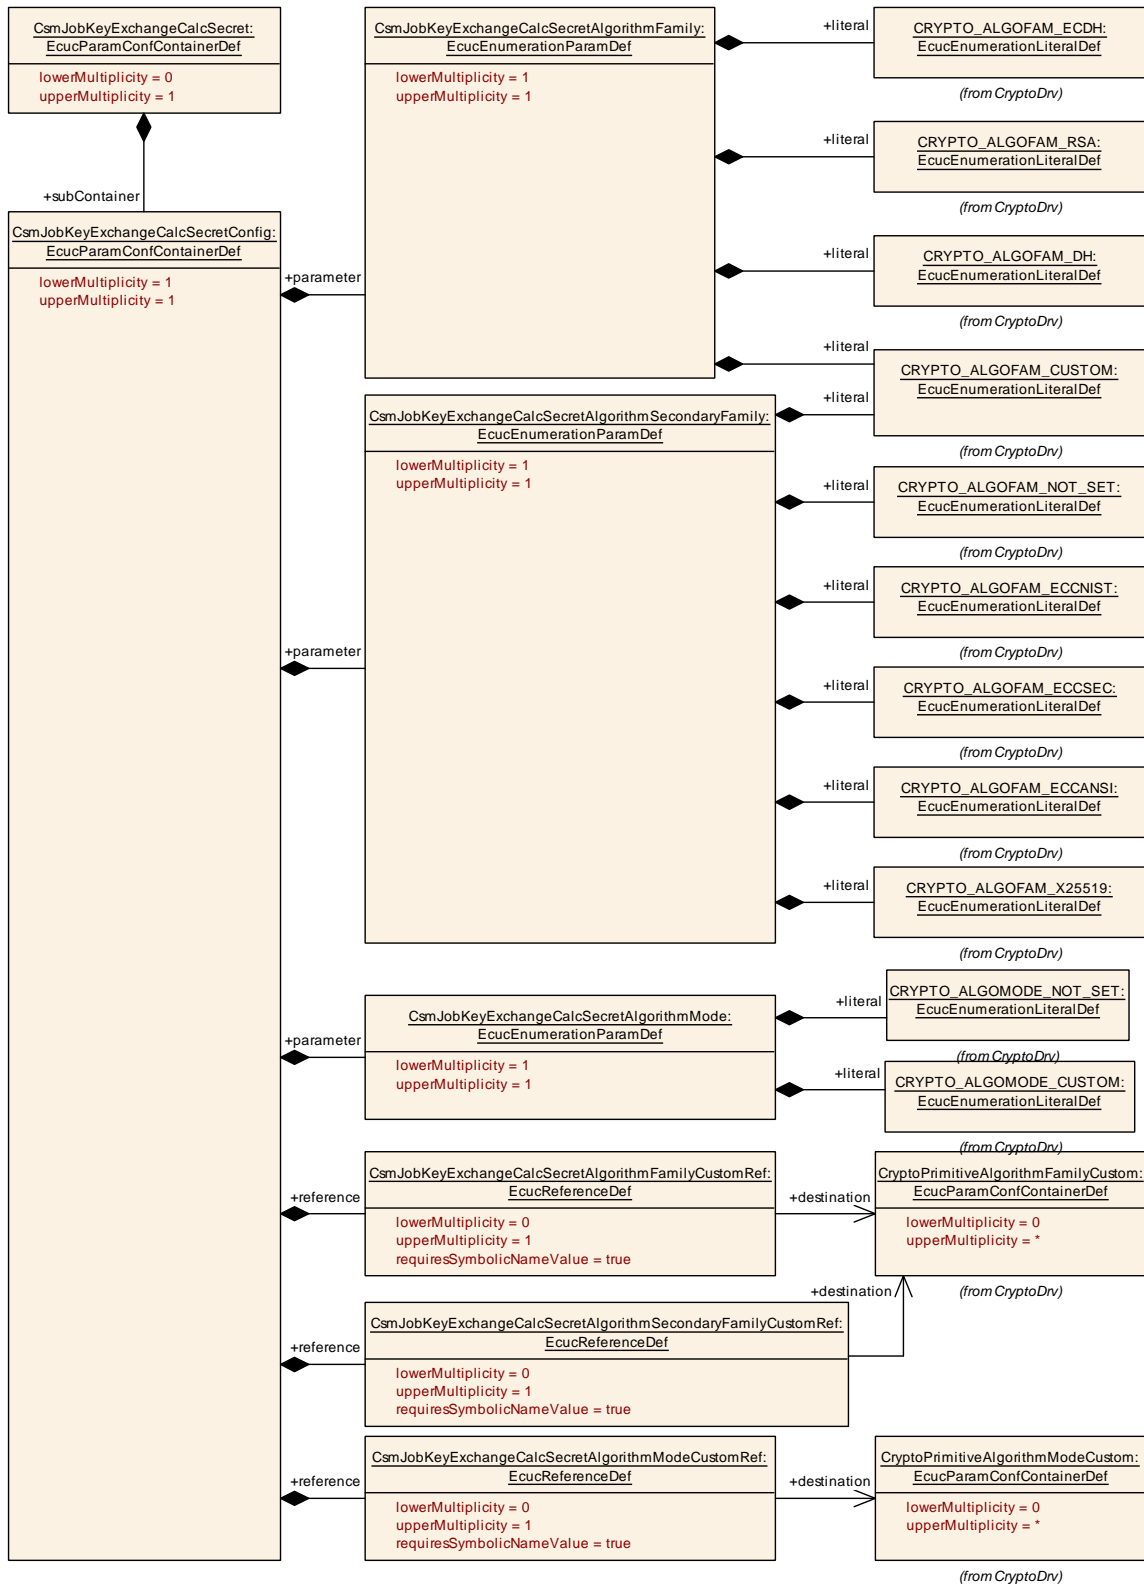

**Figure 10.39: CsmJobKeyExchangeCalcSecret Layout**

### [ECUC\_Csm\_00201] Definition of EcucParamConfContainerDef CsmJobKeyExchangeCalcSecret [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyExchangeCalcSecret                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>                      |
| <b>Description</b>              | Configurations of KeyExchangeCalcSecret primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                                |              |  |
|--|--------------|--|
| Container Name                                     | Multiplicity | Scope / Dependency   |
| <a href="#">CsmJobKeyExchangeCalcSecret Config</a> | 1            | Container for configuration of a CSM JobKeyExchangeCalc Secret. The container name serves as a symbolic name for the identifier of a JobKeyExchangeCalcSecret configuration. |

]

### 10.2.48 CsmJobKeyExchangeCalcSecretConfig

### [ECUC\_Csm\_00234] Definition of EcucParamConfContainerDef CsmJobKeyExchangeCalcSecretConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobKeyExchangeCalcSecretConfig   |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyExchangeCalcSecret</a>   |
| <b>Description</b>              | Container for configuration of a CSM JobKeyExchangeCalcSecret. The container name serves as a symbolic name for the identifier of a JobKeyExchangeCalcSecret configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters   |              |                  |
|---|--------------|------------------|
| Parameter Name  | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmFamily</a>                    | 1            | [ECUC_Csm_00235] |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmMode</a>                      | 1            | [ECUC_Csm_00237] |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmSecondary Family</a>          | 1            | [ECUC_Csm_00239] |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmFamilyCustom Ref</a>          | 0..1         | [ECUC_Csm_00324] |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmModeCustom Ref</a>            | 0..1         | [ECUC_Csm_00325] |
| <a href="#">CsmJobKeyExchangeCalcSecretAlgorithmSecondary FamilyCustomRef</a> | 0..1         | [ECUC_Csm_00326] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00235] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcSecretAlgorithmFamily [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyExchangeCalcSecretAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_DH   | – |              |
|                                  | CRYPTO_ALGOFAM_ECDH   | – |              |
|                                  | CRYPTO_ALGOFAM_RSA  | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00237] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcSecretAlgorithmMode [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyExchangeCalcSecretAlgorithmMode                  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>         |   |              |
| <b>Description</b>               | Determines the algorithm mode used for the crypto service |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_CUSTOM                                    | – |              |
|                                  | CRYPTO_ALGOMODE_NOT_SET                                   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>                                    | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00239] Definition of EcucEnumerationParamDef CsmJobKeyExchangeCalcSecretAlgorithmSecondaryFamily [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyExchangeCalcSecretAlgorithmSecondaryFamily          |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>            |  |  |
| <b>Description</b>      | Determines the algorithm family used for the crypto service. |  |  |







|                                  |                         |   |              |
|----------------------------------|-------------------------|---|--------------|
| <b>Multiplicity</b>              | 1                       |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM   | – |              |
|                                  | CRYPTO_ALGOFAM_ECCANSI  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCNIST  | – |              |
|                                  | CRYPTO_ALGOFAM_ECCSEC   | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET  | – |              |
|                                  | CRYPTO_ALGOFAM_X25519   | – |              |
| <b>Post-Build Variant Value</b>  | false                   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b> | X | All Variants |
|                                  | <b>Link time</b>        | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local            |   |              |

]

### [ECUC\_Csm\_00324] Definition of EcucReferenceDef CsmJobKeyExchangeCalcSecretAlgorithmFamilyCustomRef [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcSecretAlgorithmFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>   |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container  |   |              |
| <b>Multiplicity</b>                     | 0..1  |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>   | X | All Variants |
|   | <b>Link time</b>  | – |              |
|   | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyExchangeCalcSecretAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00325] Definition of EcucReferenceDef CsmJobKeyExchangeCalcSecretAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcSecretAlgorithmModeCustomRef                |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>                |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |





|                                  |  |   |              |
|----------------------------------|--|---|--------------|
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>        | scope: local<br>dependency: This reference shall only be present if CsmJobKeyExchangeCalcSecretAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

**[ECUC\_Csm\_00326] Definition of EcucReferenceDef CsmJobKeyExchangeCalcSecretAlgorithmSecondaryFamilyCustomRef** [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyExchangeCalcSecretAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyExchangeCalcSecretConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyExchangeCalcSecretSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.49 CsmCallbacks**

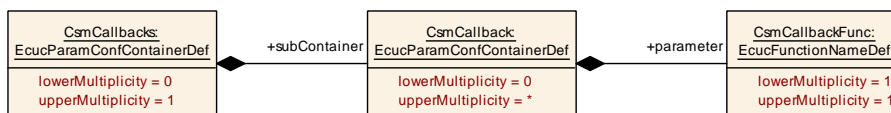

**Figure 10.40: CsmCallbacks Layout**

**[ECUC\_Csm\_00008] Definition of EcucParamConfContainerDef CsmCallbacks** [

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmCallbacks                                   |
| <b>Parent Container</b>         | <a href="#">Csm</a>                            |
| <b>Description</b>              | Container for callback function configurations |
| <b>Configuration Parameters</b> |  |

| No Included Parameters |              |  |
|------------------------|--------------|--|
| Included Containers    |              |  |
| Container Name         | Multiplicity | Scope / Dependency                                 |
| CsmCallback            | 0..*         | Container for configuration of a callback function |

]

### 10.2.50 CsmCallback

#### [ECUC\_Csm\_00109] Definition of EcucParamConfContainerDef CsmCallback [

| Container Name                   | CsmCallback  |   |              |
|----------------------------------|--|---|--------------|
| Parent Container                 | CsmCallbacks                                       |   |              |
| Description                      | Container for configuration of a callback function |   |              |
| Multiplicity Configuration Class | Pre-compile time                                   | X | All Variants |
|                                  | Link time  | – |              |
|                                  | Post-build time                                    | – |              |
| Configuration Parameters         |  |   |              |

| Included Parameters |              |                  |  |
|---------------------|--------------|------------------|--|
| Parameter Name      | Multiplicity | ECUC ID          |  |
| CsmCallbackFunc     | 1            | [ECUC_Csm_00110] |  |

| No Included Containers |
|------------------------|
|------------------------|

]

#### [ECUC\_Csm\_00110] Definition of EcucFunctionNameDef CsmCallbackFunc [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| Parameter Name                   | CsmCallbackFunc  |   |              |
| Parent Container                 | CsmCallback  |   |              |
| Description                      | Callback function to be called if an asynchronous operation has finished. The corresponding job has to be configured to be processed asynchronously. |   |              |
| Multiplicity                     | 1  |   |              |
| Type                             | EcucFunctionNameDef  |   |              |
| Default value                    | –  |   |              |
| Regular Expression               | –  |   |              |
| Post-Build Variant Value         | false  |   |              |
| Multiplicity Configuration Class | Pre-compile time   | X | All Variants |
|                                  | Link time  | – |              |
|                                  | Post-build time  | – |              |
| Value Configuration Class        | Pre-compile time   | X | All Variants |




△

|                           |                        |   |  |
|---------------------------|------------------------|---|--|
|                           | <b>Link time</b>       | - |  |
|                           | <b>Post-build time</b> | - |  |
| <b>Scope / Dependency</b> | scope: local           |   |  |

└

**10.2.51 CsmJobKeyWrap**

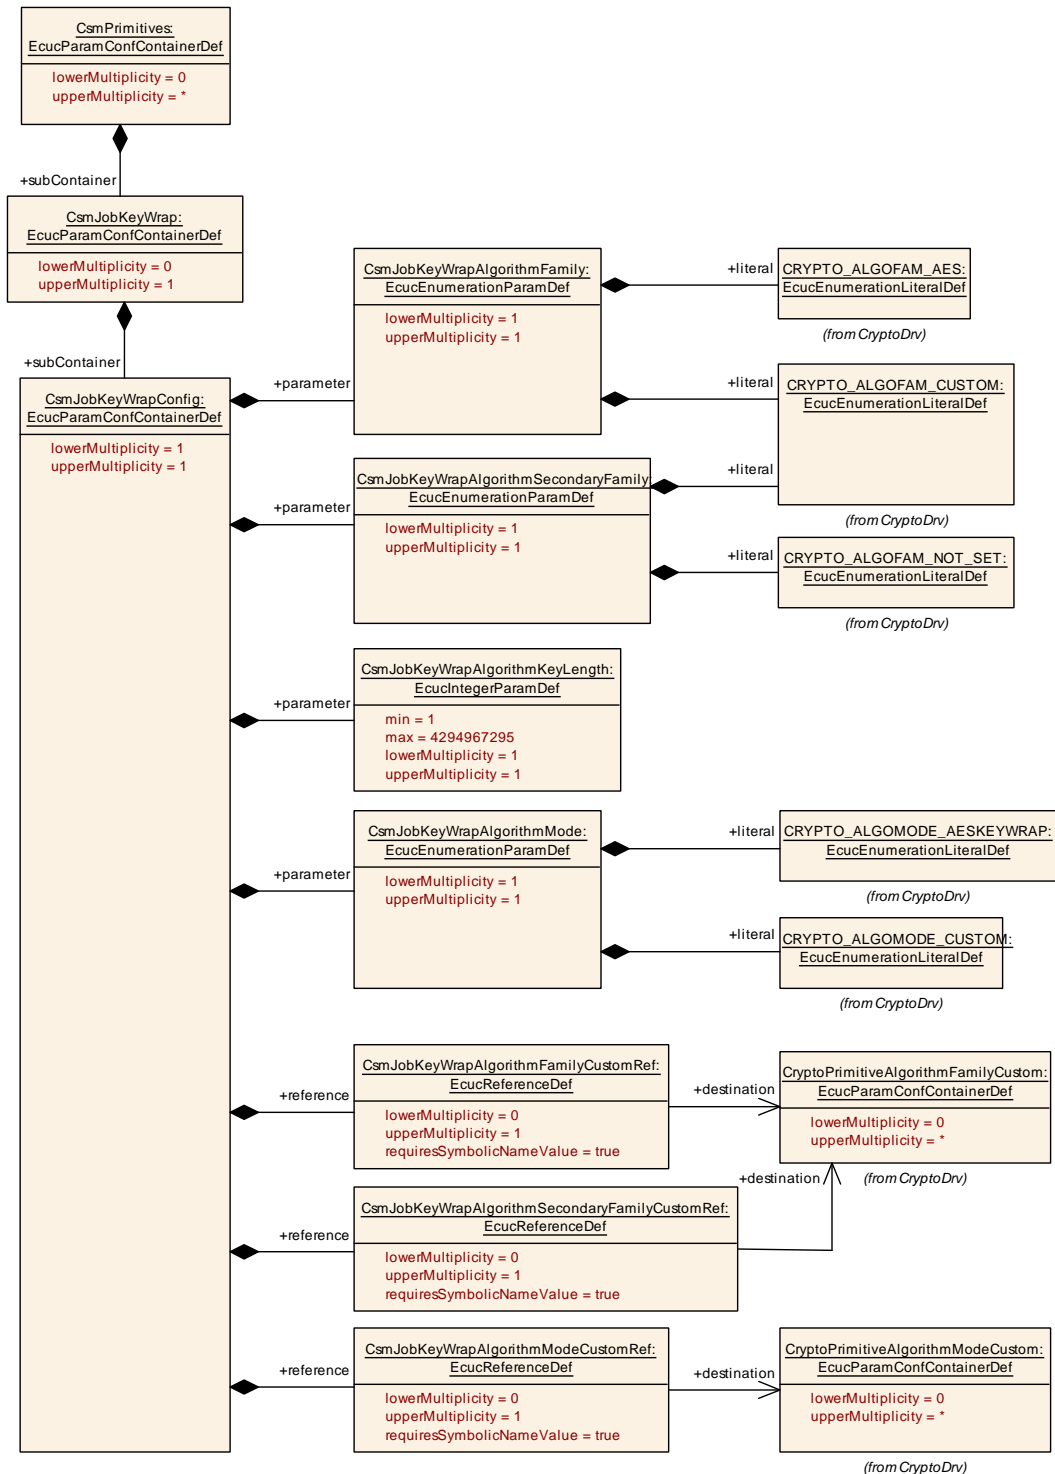

**Figure 10.41: CsmJobKeyWrap Layout**

**[ECUC\_Csm\_00356] Definition of EcucParamConfContainerDef CsmJobKeyWrap**

|                                 |                                      |
|---------------------------------|--------------------------------------|
| <b>Container Name</b>           | CsmJobKeyWrap                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>        |
| <b>Description</b>              | Configurations of KeyWrap primitives |
| <b>Configuration Parameters</b> |                                      |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                 |              |   |
|-------------------------------------|--------------|---|
| Container Name                      | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeyWrapConfig</a> | 1            | Container for configuration of a CSM key wrap operation. The container name serves as a symbolic name for the identifier of a key wrap configuration. |

]

## 10.2.52 CsmJobKeyWrapConfig

### [ECUC\_Csm\_00358] Definition of EcucParamConfContainerDef CsmJobKeyWrapConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobKeyWrapConfig   |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyWrap</a>   |
| <b>Description</b>              | Container for configuration of a CSM key wrap operation. The container name serves as a symbolic name for the identifier of a key wrap configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeyWrapAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00359] |
| <a href="#">CsmJobKeyWrapAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00360] |
| <a href="#">CsmJobKeyWrapAlgorithmMode</a>                     | 1            | [ECUC_Csm_00361] |
| <a href="#">CsmJobKeyWrapAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00362] |
| <a href="#">CsmJobKeyWrapAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00363] |
| <a href="#">CsmJobKeyWrapAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00365] |
| <a href="#">CsmJobKeyWrapAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00364] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

### [ECUC\_Csm\_00359] Definition of EcucEnumerationParamDef CsmJobKeyWrapAlgorithmFamily [

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyWrapAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyWrapConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_AES  | – |              |
|                                  | CRYPTO_ALGOFAM_CUSTOM   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

### [ECUC\_Csm\_00360] Definition of EcucIntegerParamDef CsmJobKeyWrapAlgorithmKeyLength [

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyWrapAlgorithmKeyLength         |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyWrapConfig</a>     |   |              |
| <b>Description</b>                      | Size of the key encryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1                                       |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                     |   |              |
| <b>Range</b>                            | 1 .. 4294967295                         |   |              |
| <b>Default value</b>                    | –                                       |   |              |
| <b>Post-Build Variant Value</b>         | false                                   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Scope / Dependency</b>               | scope: local                            |   |              |

]

### [ECUC\_Csm\_00361] Definition of EcucEnumerationParamDef CsmJobKeyWrapAlgorithmMode [

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyWrapAlgorithmMode                                 |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyWrapConfig</a>                        |  |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service. |  |  |





|                                  |                            |   |              |
|----------------------------------|----------------------------|---|--------------|
| <b>Multiplicity</b>              | 1                          |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef    |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_AESKEYWRAP | – |              |
|                                  | CRYPTO_ALGOMODE_CUSTOM     | – |              |
| <b>Post-Build Variant Value</b>  | false                      |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>    | X | All Variants |
|                                  | <b>Link time</b>           | – |              |
|                                  | <b>Post-build time</b>     | – |              |
| <b>Scope / Dependency</b>        | scope: local               |   |              |

]

### [ECUC\_Csm\_00362] Definition of EcucEnumerationParamDef CsmJobKeyWrap AlgorithmSecondaryFamily [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyWrapAlgorithmSecondaryFamily                        |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyWrapConfig</a>                          |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                      |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET                                       | – |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                       | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

### [ECUC\_Csm\_00363] Definition of EcucReferenceDef CsmJobKeyWrapAlgorithm FamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyWrapAlgorithmFamilyCustomRef                              |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyWrapConfig</a>                                |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |







|                           |   |
|---------------------------|---|
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmJobKeyWrapAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |
|---------------------------|---|

]

### [ECUC\_Csm\_00365] Definition of EcucReferenceDef CsmJobKeyWrapAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyWrapAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyWrapConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyWrapAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |


]

### [ECUC\_Csm\_00364] Definition of EcucReferenceDef CsmJobKeyWrapAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyWrapAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyWrapConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyWrapSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

**10.2.53 CsmJobKeyUnwrap**

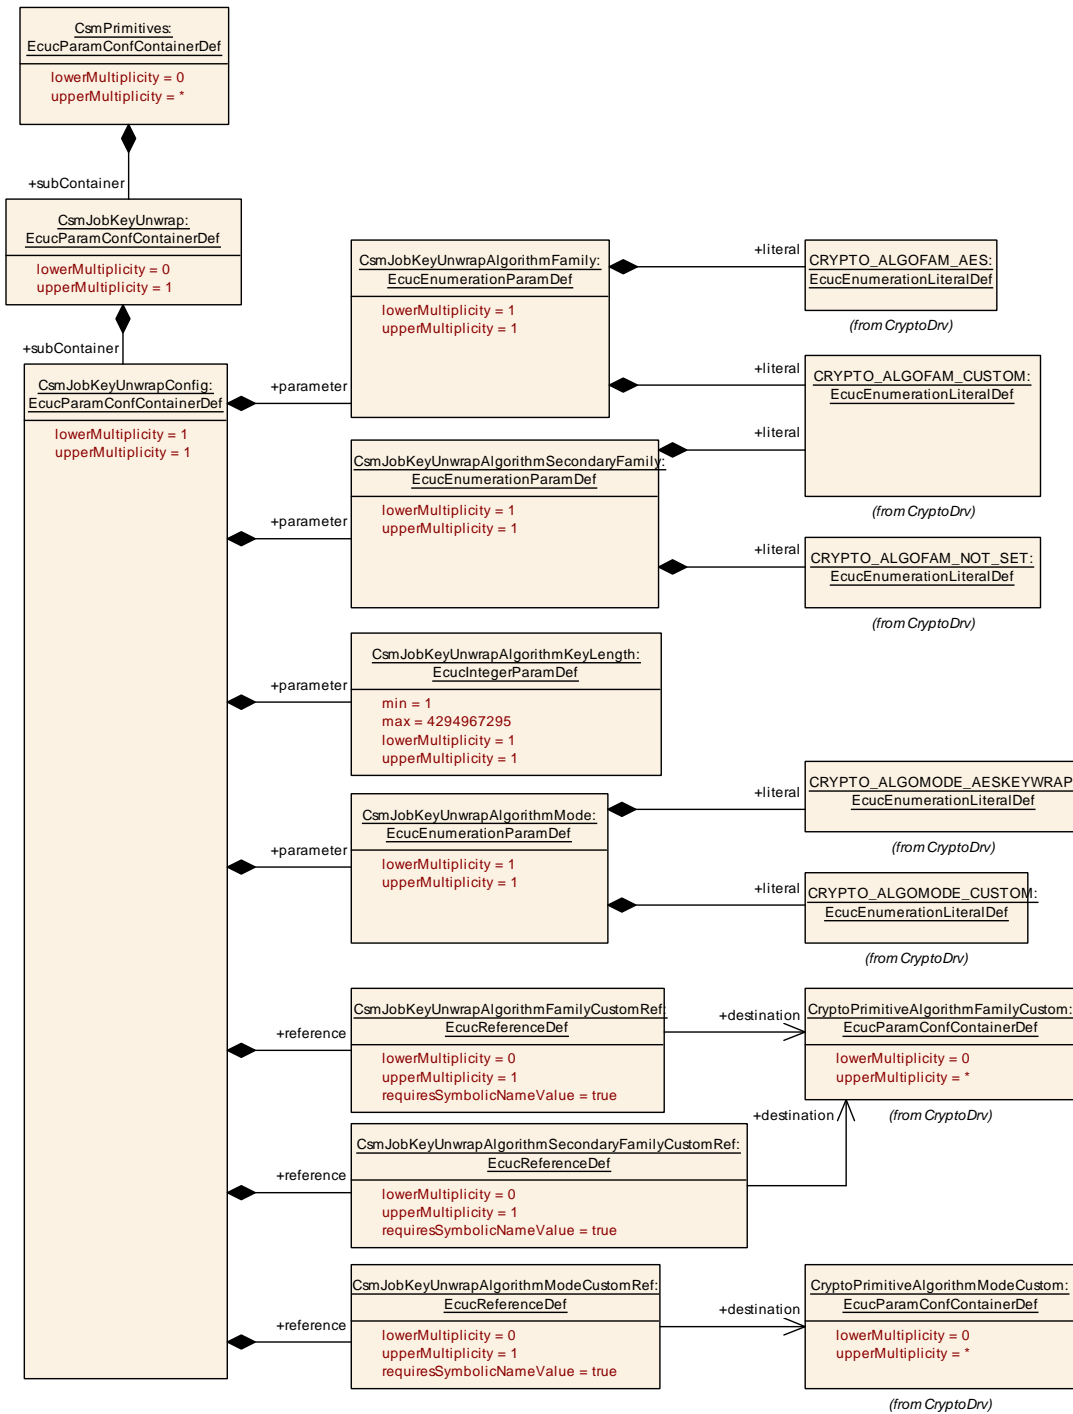

**Figure 10.42: CsmJobKeyUnwrap Layout**

**[ECUC\_Csm\_00357] Definition of EcucParamConfContainerDef CsmJobKeyUnwrap**

|                                 |  |
|---------------------------------|--|
| <b>Container Name</b>           | CsmJobKeyUnwrap                        |
| <b>Parent Container</b>         | <a href="#">CsmPrimitives</a>          |
| <b>Description</b>              | Configurations of KeyUnWrap primitives |
| <b>Configuration Parameters</b> |  |

|                               |
|-------------------------------|
| <b>No Included Parameters</b> |
|-------------------------------|

| Included Containers                   |              |   |
|---------------------------------------|--------------|---|
| Container Name                        | Multiplicity | Scope / Dependency  |
| <a href="#">CsmJobKeyUnwrapConfig</a> | 1            | Container for configuration of a CSM key unwrap operation. The container name serves as a symbolic name for the identifier of a key unwrap configuration. |

]

## 10.2.54 CsmJobKeyUnwrapConfig

### [ECUC\_Csm\_00367] Definition of EcucParamConfContainerDef CsmJobKeyUnwrapConfig [

|                                 |   |
|---------------------------------|---|
| <b>Container Name</b>           | CsmJobKeyUnwrapConfig   |
| <b>Parent Container</b>         | <a href="#">CsmJobKeyUnwrap</a>   |
| <b>Description</b>              | Container for configuration of a CSM key unwrap operation. The container name serves as a symbolic name for the identifier of a key unwrap configuration. |
| <b>Configuration Parameters</b> |   |

| Included Parameters  |              |                  |
|--|--------------|------------------|
| Parameter Name   | Multiplicity | ECUC ID          |
| <a href="#">CsmJobKeyUnwrapAlgorithmFamily</a>                   | 1            | [ECUC_Csm_00370] |
| <a href="#">CsmJobKeyUnwrapAlgorithmKeyLength</a>                | 1            | [ECUC_Csm_00371] |
| <a href="#">CsmJobKeyUnwrapAlgorithmMode</a>                     | 1            | [ECUC_Csm_00372] |
| <a href="#">CsmJobKeyUnwrapAlgorithmSecondaryFamily</a>          | 1            | [ECUC_Csm_00369] |
| <a href="#">CsmJobKeyUnwrapAlgorithmFamilyCustomRef</a>          | 0..1         | [ECUC_Csm_00373] |
| <a href="#">CsmJobKeyUnwrapAlgorithmModeCustomRef</a>            | 0..1         | [ECUC_Csm_00375] |
| <a href="#">CsmJobKeyUnwrapAlgorithmSecondaryFamilyCustomRef</a> | 0..1         | [ECUC_Csm_00374] |

|                               |
|-------------------------------|
| <b>No Included Containers</b> |
|-------------------------------|

]

**[ECUC\_Csm\_00370] Definition of EcucEnumerationParamDef CsmJobKeyUnwrapAlgorithmFamily**

|                                  |   |   |              |
|----------------------------------|---|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyUnwrapAlgorithmFamily  |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyUnwrapConfig</a>   |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. This parameter defines the most significant part of the algorithm. |   |              |
| <b>Multiplicity</b>              | 1   |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef   |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_AES  | – |              |
|                                  | CRYPTO_ALGOFAM_CUSTOM   | – |              |
| <b>Post-Build Variant Value</b>  | false   |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>   | X | All Variants |
|                                  | <b>Link time</b>  | – |              |
|                                  | <b>Post-build time</b>  | – |              |
| <b>Scope / Dependency</b>        | scope: local  |   |              |

]

**[ECUC\_Csm\_00371] Definition of EcucIntegerParamDef CsmJobKeyUnwrapAlgorithmKeyLength**

|   |   |   |              |
|---|---|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyUnwrapAlgorithmKeyLength       |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyUnwrapConfig</a>   |   |              |
| <b>Description</b>                      | Size of the key encryption key in bytes |   |              |
| <b>Multiplicity</b>                     | 1                                       |   |              |
| <b>Type</b>                             | EcucIntegerParamDef                     |   |              |
| <b>Range</b>                            | 1 .. 4294967295                         |   |              |
| <b>Default value</b>                    | –                                       |   |              |
| <b>Post-Build Variant Value</b>         | false                                   |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>                 | X | All Variants |
|   | <b>Link time</b>                        | – |              |
|   | <b>Post-build time</b>                  | – |              |
| <b>Scope / Dependency</b>               | scope: local                            |   |              |

]

**[ECUC\_Csm\_00372] Definition of EcucEnumerationParamDef CsmJobKeyUnwrapAlgorithmMode**

|                         |  |  |  |
|-------------------------|--|--|--|
| <b>Parameter Name</b>   | CsmJobKeyUnwrapAlgorithmMode                               |  |  |
| <b>Parent Container</b> | <a href="#">CsmJobKeyUnwrapConfig</a>                      |  |  |
| <b>Description</b>      | Determines the algorithm mode used for the crypto service. |  |  |





|                                  |                            |   |              |
|----------------------------------|----------------------------|---|--------------|
| <b>Multiplicity</b>              | 1                          |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef    |   |              |
| <b>Range</b>                     | CRYPTO_ALGOMODE_AESKEYWRAP | – |              |
|                                  | CRYPTO_ALGOMODE_CUSTOM     | – |              |
| <b>Post-Build Variant Value</b>  | false                      |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>    | X | All Variants |
|                                  | <b>Link time</b>           | – |              |
|                                  | <b>Post-build time</b>     | – |              |
| <b>Scope / Dependency</b>        | scope: local               |   |              |

]

### [ECUC\_Csm\_00369] Definition of EcucEnumerationParamDef CsmJobKeyUnwrapAlgorithmSecondaryFamily [

|                                  |  |   |              |
|----------------------------------|--|---|--------------|
| <b>Parameter Name</b>            | CsmJobKeyUnwrapAlgorithmSecondaryFamily                      |   |              |
| <b>Parent Container</b>          | <a href="#">CsmJobKeyUnwrapConfig</a>                        |   |              |
| <b>Description</b>               | Determines the algorithm family used for the crypto service. |   |              |
| <b>Multiplicity</b>              | 1  |   |              |
| <b>Type</b>                      | EcucEnumerationParamDef                                      |   |              |
| <b>Range</b>                     | CRYPTO_ALGOFAM_CUSTOM  | – |              |
|                                  | CRYPTO_ALGOFAM_NOT_SET                                       | – |              |
| <b>Post-Build Variant Value</b>  | false  |   |              |
| <b>Value Configuration Class</b> | <b>Pre-compile time</b>                                      | X | All Variants |
|                                  | <b>Link time</b>   | – |              |
|                                  | <b>Post-build time</b>                                       | – |              |
| <b>Scope / Dependency</b>        | scope: local   |   |              |

]

### [ECUC\_Csm\_00373] Definition of EcucReferenceDef CsmJobKeyUnwrapAlgorithmFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyUnwrapAlgorithmFamilyCustomRef                            |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyUnwrapConfig</a>                              |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family custom container |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom    |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |





|                           |   |
|---------------------------|---|
| <b>Scope / Dependency</b> | scope: local<br>dependency: This reference shall only be present if CsmJobKeyUnwrapAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |
|---------------------------|---|

]

### [ECUC\_Csm\_00375] Definition of EcucReferenceDef CsmJobKeyUnwrapAlgorithmModeCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyUnwrapAlgorithmModeCustomRef  |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyUnwrapConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm mode custom container   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmModeCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyUnwrapAlgorithmMode is set to CRYPTO_ALGOMODE_CUSTOM. |   |              |

]

### [ECUC\_Csm\_00374] Definition of EcucReferenceDef CsmJobKeyUnwrapAlgorithmSecondaryFamilyCustomRef [

|   |  |   |              |
|---|--|---|--------------|
| <b>Parameter Name</b>                   | CsmJobKeyUnwrapAlgorithmSecondaryFamilyCustomRef   |   |              |
| <b>Parent Container</b>                 | <a href="#">CsmJobKeyUnwrapConfig</a>  |   |              |
| <b>Description</b>                      | Reference to a customer specific algorithm family container in the Crypto Driver   |   |              |
| <b>Multiplicity</b>                     | 0..1   |   |              |
| <b>Type</b>                             | Symbolic name reference to CryptoPrimitiveAlgorithmFamilyCustom  |   |              |
| <b>Multiplicity Configuration Class</b> | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Value Configuration Class</b>        | <b>Pre-compile time</b>  | X | All Variants |
|   | <b>Link time</b>   | – |              |
|   | <b>Post-build time</b>   | – |              |
| <b>Scope / Dependency</b>               | scope: local<br>dependency: This reference shall only be present if CsmJobKeyUnwrapSecondaryAlgorithmFamily is set to CRYPTO_ALGOFAM_CUSTOM. |   |              |

]

### **10.3 Published Information**

For details refer to the chapter 10.3 “Published Information” in [\[6\]](#).